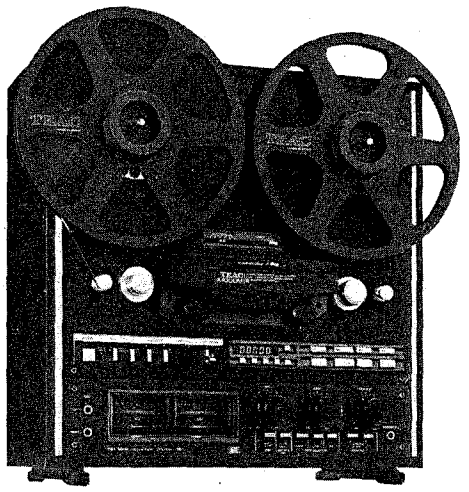

TEAC®

SERVICE MANUAL

X-1000M/X-1000

Stereo Tape Deck

X−1000は海外専用モデルです。

dbx noise reduction system made under license from dbx, Incorporated. The word dbx and the dbx Symbol are trademarks of dbx, Incorporated.

⚠ Parts marked with this sign are safety critical components. They must always be replaced with identical components – refer to the appropriate parts list and ensure exact replacement.

Effective: DECEMBER, 1982 A20252

1 SPECIFICATIONS AND SERVICE DATA

SPECIFICATIONS

Track System
- **X-1000M:** 2 track, 2 channel stereo or mono
  4 track playback switchable
- **X-1000:** 4 track, 2 channel stereo or mono

Head System
- **X-1000M:** 4 heads: erase, record, 2T playback and 4T playback
- **X-1000:** 3 heads: erase, record, playback

Reel Size 10-½" and 7"

Tape Speed
- **X-1000M:** 38cm/s (15 ips) and 19cm/s (7-½ ips)
- **X-1000:** 19cm/s (7-½ ips) and 9.5cm/s (3-¾ ips)

Inputs (level and impedance)

MIC:	Specified input level:	−60dB (0.775mV)/10kohms
	Min. input level:	−70dB (245μV)
LINE IN:	Specified input level:	−12dB (195mV)/50kohms
	Min. input level:	−22dB (61.5mV)

Outputs (level and impedance)

OUTPUT:	Specified output level:	−5dB (436mV)/10kohms
	Max. output level:	+1dB (0.869V)
PHONES:	Specified output level:	−24dB (48.9mV)/8ohms

Playback equalization

	"LH" tape	"EE" tape
38cm/s:	3,180μs + 50μs ∞ + 35μs (IEC)	3,180μs + 35μs
19cm/s:	3,180μs + 50μs	3,180μs + 35μs
9.5cm/s:	3,180μs + 90μs	3,180μs + 50μs

Motors
- **Capstan motor:** FG servo DC motor
- **Reel motor:** 2 DC slotless motors

Bias Frequency 100kHz

Power Requirements
100/120/220/240V, AC 50/60Hz 110W (General export model)
220V AC 50Hz, 110W (Europe model)
240V AC 50Hz, 110W (U.K./Australia model)
120V AC 60Hz, 110W (U.S.A./Canada model)

Weight 22.0kg (48-8/16 lbs) net
26kg (57-5/16 lbs) (with wooden case)

Dimensions See Fig. 1-1 on page 3.

SERVICE DATA

MECHANICAL

Tape Speed Deviation 3,000Hz ± 30Hz

Tape Speed Drift 15Hz

Wow and Flutter

Playback:	38cm/s: 0.04% (WRMS), 0.08% (RMS)
	19cm/s: 0.05% (WRMS), 0.10% (RMS)
	9.5cm/s: 0.07% (WRMS), 0.12% (RMS)
Record/Playback:	38cm/s: 0.10% (RMS)
	19cm/s: 0.12% (RMS)
	9.5cm/s: 0.15% (RMS)

Pinch Roller Pressure 1.35kg ~ 1.9kg (3.0 lbs ~ 4.2 lbs)

Tape Tension
- **Play mode:**
  - **Take-up:** 50g ± 10g (1.4oz ~ 2.1oz)
  - **Supply:** 50g ± 10g (1.4oz ~ 2.1oz)
- **Fast winding mode**
  - **Take-up:** 110g ±10g (3.5oz ~ 4.2oz)
  - **Supply:** ————

Brake Torque

Forward direction:	1.2 ~ 1.9kg-cm (17 ~ 26oz-inch) [X-1000M]
	1.2 ~ 1.7kg-cm (17 ~ 24oz-inch) [X-1000]
Reverse direction:	0.7kg-cm (9.7oz-inch) or less [X-1000M]
	0.6kg-cm (8.3oz-inch) or less [X-1000]
Left/right deviation:	0.2kg-cm (2.8oz-inch) or less

Fast Winding Time 100 seconds or less for 550m (1800 feet)

Pitch Control Standard tape speed ±6% or more

TIMER Activate Time *4 sec. ± 2 sec.*

ELECTRICAL

Frequency Response
Refer to the specifications in "3 ELECTRICAL ADJUSTMENTS AND CHECKS".

Signal to Noise Ratio

		LH-I, -II	EE
Playback:	38cm/s:	50dB min.	52dB min.
	19cm/s:	50dB min.	52dB min.
	9.5cm/s:	49dB min.	52dB min.
Overall:	38cm/s:	48dB min.	50dB min.
	19cm/s:	48dB min.	50dB min.
	9.5cm/s:	46dB min.	50dB min.

Overall (dbx): 65dB min. (All speeds, various EQ tapes)

Erase Efficiency At 1kHz (measured with input 10dB higher than the specified input level)
38cm/s: 65dB min.
19cm/s: 70dB min.
9.5cm/s: 70dB min.

Channel Separation 50dB min. at 1kHz

Adjacent Track Crosstalk 40dB min. at 125Hz

Total Harmonic Distortion At 1kHz, and at HIGH speed
0.8% or less (LH-I, LH-II, EE)
0.8% or less (dbx IN)
3% or less (dbx IN + 20VU)

- Improvements may result in SPECIFICATIONS AND SERVICE DATA changes.
- Value of "dB" in the data refers to 0dB (0.775V), except where specified.

2 MECHANICAL ADJUSTMENTS AND CHECKS

2-1 ROTATING PART THRUST CLEARANCE CHECKS

Reference values

Capstan shaft:	0.1mm to 0.25mm (magnefloat type)
Guide roller:	0.05mm to 0.3mm
Tension arm guide roller:	0.05mm to 0.3mm
Reel motor:	0 (spring type)
Tension arm:	0 (spring type)

NOTE: Since the capstan shaft is a magnefloat type, check that it is forced towards the rear of the deck while rotating.

2-2 BRAKE ADJUSTMENT

NOTE: The explanation and figure in this paragraph are for the left side brake, similar checks and adjustments are applicable for the right side one.

1. Adjust by moving the brake band bracket in either direction (arrow (A)) so that the reel motor chassis is in parallel with the brake arm, and so that the brake band makes proper clearance equally all around the reel table base.
2. Adjust by moving the brake solenoid in either direction (arrow (D)) so that the stroke of the solenoid plunger is about 2mm.
3. Adjust by moving the band ass'y retaining plate as shown in (B, C, E) so that, when the plunger is pushed in the direction of the solenoid housing, the reel table base is not rubbed by the brake band and is properly spaced.

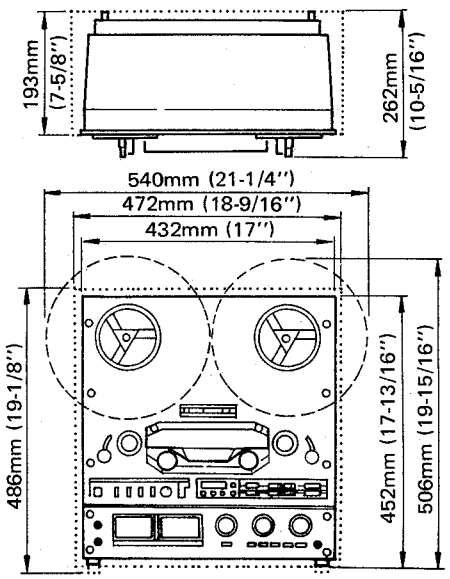

Broken line indicates General Export Models for Limited Areas.

Fig. 1-1 Dimensions

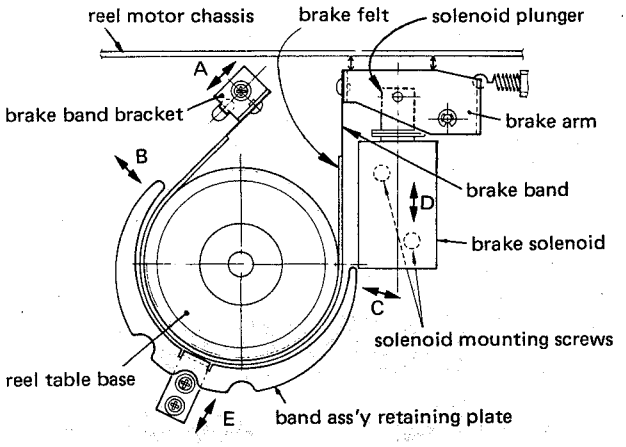

Fig. 2-1

2-3 BRAKE TORQUE MEASUREMENT

1. Place an empty 7" reel, connected to a spring scale by a string, on the reel table.
2. Pull the scale away from the reel and read the scale indication only when the reel table is steady motion.
3. Do steps 1 and 2 for each measuring condition, (A) through (D) in Fig. 2-2.
4. The values are as chart in Fig. 2-2.

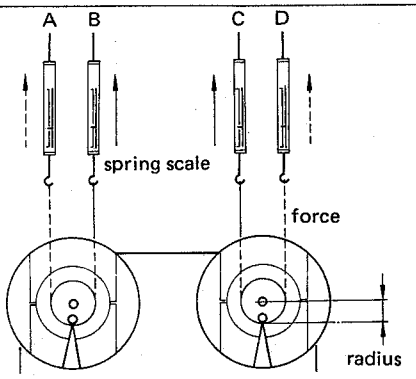

↑ Forward direction (B) (C)	1.2 to 1.9kg-cm (17 to 26oz-inch) [X-1000M] 1.2 to 1.7kg-cm (17 to 24oz-inch) [X-1000]
↓ Reverse direction (A) (D)	0.7kg-cm (9.7oz-inch) or less [X-1000M] 0.6kg-cm (8.3oz-inch) or less [X-1000]
Left/right deviation	0.2kg-cm (2.8oz-inch) or less

NOTES: 1. The reverse direction values are reference.
2. The specification of left/right deviation only applies for forward direction torques.

Torque calculating formulas:
(1) Torque (in g-cm or oz-inch)
= Force or Weight (in g or oz) x Radius (in cm or inch)
(2) Conversion of g-cm to oz-inch:
g-cm x 0.0139 = oz-inch

Fig. 2-2

2-4 PAUSE POSITION ADJUSTMENT

1. Place the deck in the pause mode.
2. Adjust by turning the pause positioning nut so that the clearance between the capstan shaft and the tape is 0.5mm to 1.0mm.
3. Of the two capstan shaft/pinch rollers, adjustment is allowable only for the side having the narrower clearance.
4. Check that, by repetition of play mode to pause mode and stop mode to pause mode, there is clearance at both sides.

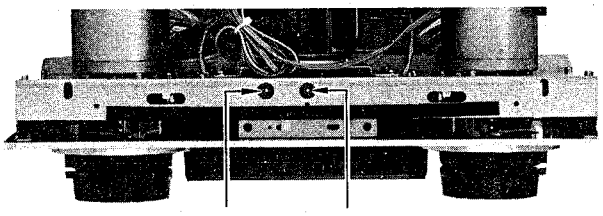

Fig. 2-3 Pause position and pinch roller pressure stroke adjustments

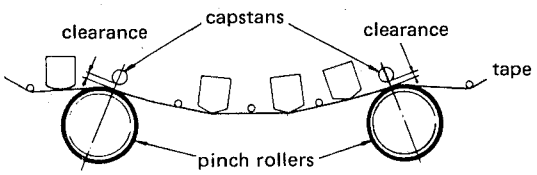

Figure shows X-1000M.

Fig. 2-4 Pause position adjustment

2-5 PINCH ROLLER PRESSURE STROKE ADJUSTMENT

1. Set the deck in the play mode.
2. Adjust by turning the pressure stroke adj. nut (Fig. 2-3) so that the clearance between the pin and the stopper cushion is about 1.0mm.
3. Since the clearance is produced at one side (left or right), adjustment for this side only is permissible.

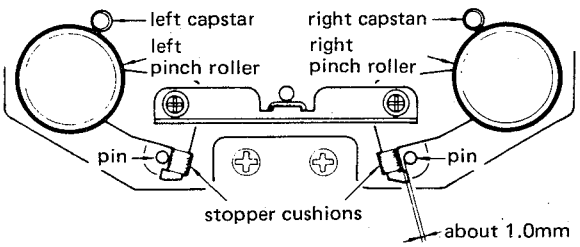

Either the left or right should have a clearance of about 1.0mm.

Fig. 2-5

2-6 PINCH ROLLER PRESSURE MEASUREMENT

NOTES: 1. The explanation below applies to both the left and right pinch rollers.
2. Both pinch roller pressures are automatically set with equal value.

1. Hold both the left and right tension arms in the upper positions using rubber bands, string etc.
2. Set the deck in the play mode with no tape loaded.
3. Attach the spring scale to the pinch roller as shown in the figure.
4. Draw the pinch roller away from the capstan shaft (in the direction of a line intersecting the centers of the capstan shaft and the pinch roller) until the capstan shaft and the pinch roller are separated.
5. Return the scale back until the pinch roller just begins to turn. The scale should then be reading as follow.
   Reference value: 1.35kg to 1.9kg (3.0 lbs to 4.2 lbs)
6. If the reading is out of specification, replace defective part(s). There are no adjustable parts.

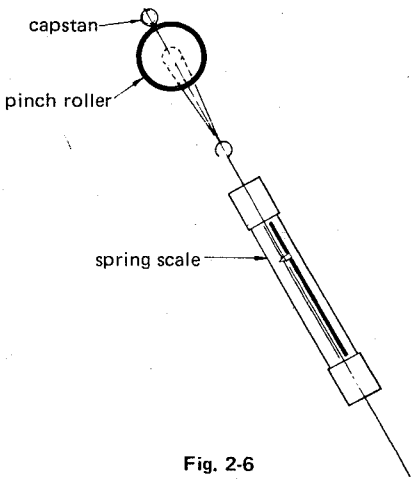

Fig. 2-6

2-7 CAPSTAN MOTOR REPLACEMENT

1. When replacing the capstan motor, install as shown in illustration.

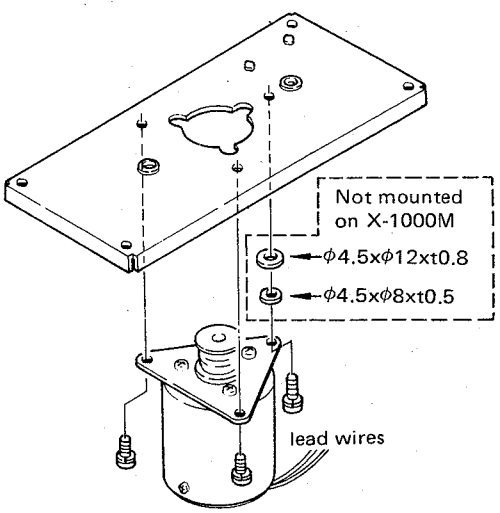

Fig. 2-7

2-8 TAPE TENSION

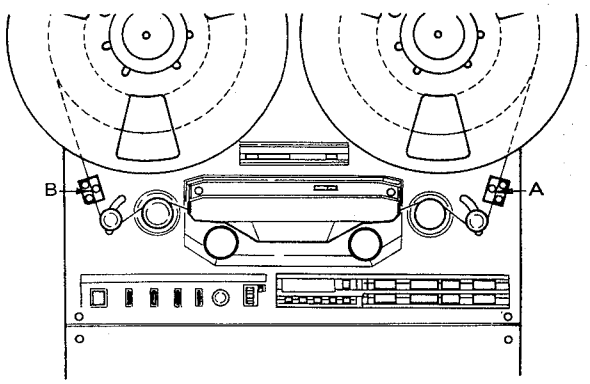

Tape tension value

NOTE: Alphabet letters in parentheses indicates measuring point shown in figure.

Play mode

Take-up: (A) in FWD	50g ± 10g (1.4oz ~ 2.1oz)
Supply: (B) in FWD	50g ± 10g (1.4oz ~ 2.1oz)

Fast winding mode

Take-up: (A) in F.F. (B) in REW	110g ± 10g (3.5oz ~ 4.2oz)
Supply: (B) in F.F. (A) in REW	This value is automatically set when doing "2-9 FAST WINDING SPEED" adjustment.

Fig. 2-8

NOTES:
1. Since these settings are precisely factory adjusted, in general, they should not be re-adjusted. If it is specifically required, a special meter is needed.
2. To facilitate adjustment, the deck should be placed in a vertical position.
3. For the reels mounted on both left and right reel tables, use the same size ones.
4. Before all the following adjustments (2-8-1 ~ 2-8-3), perform next instructions in order to activate the relevant circuit.
   a. Thread the tape to lift up both tension/shut-off arms.
   b. Set the POWER switch to ON.
   c. Leave the deck as it is for 5 to 10 minutes.
5. There should be almost equal values between tape tension at point A during fast forward mode and at point B during rewind mode.

2-8-1 IN PLAY MODE

1. Place a reel loading TEAC YTT-8013 test tape on the left reel table and an empty reel on the right reel table, then thread the tape.
2. Let the tape run in fast forward mode until both reels have nearly the same tape winding diameter.
3. During play at a LOW speed, measure tape tension at point A.
4. Adjust R120 so that the specified tape tension of 50g ± 10g (1.4oz ~ 2.1oz) is obtained.

2-8-2 IN FAST FORWARD MODE

1. Load a TEAC YTT-8013 test tape on the left reel table and an empty reel on the right reel table, then thread the tape.
2. Stop the left reel by hand and set the deck in fast forward mode.
3. Adjust R237 to obtain a 100g to 120g (3.5oz ~ 4.2oz) value at point A (Obtain a 100g or 3.0oz value as far as possible).

2-8-3 IN REWIND MODE

1. Load a TEAC YTT-8013 test tape on the right reel table and the empty reel on the left reel table, then thread the tape.
2. Stop the right reel by hand and set the deck in the rewind mode.
3. Adjust R238 to obtain a 100g to 120g (3.0oz ~ 3.6oz) value at point B (Obtain a 100g or 3.5oz as far as possible).

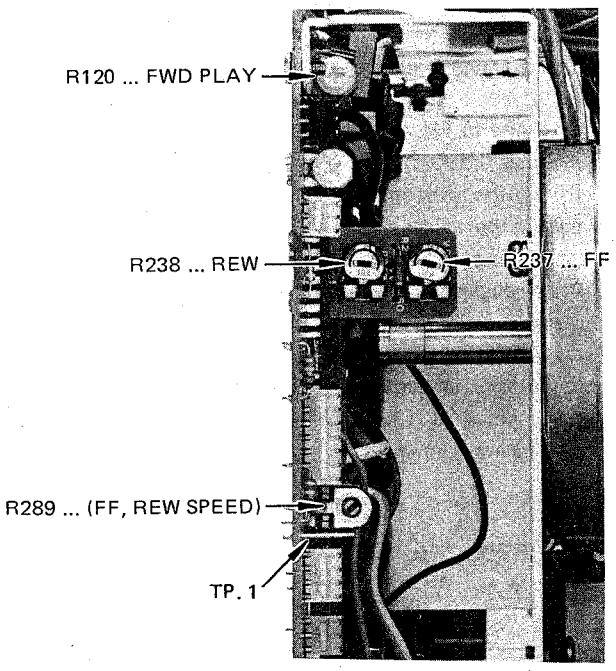

Fig. 2-9 Tape tension adjuster location

2-9 FAST WINDING SPEED

1. Set the deck in vertical position.
2. Connect oscilloscope between TP1 test point on the POWER SERVO PCB and ground.
3. Thread a TEAC YTT-8013 test tape. In this case, either use of 7 inch reels or 10 inch are permitted provided both left and right reels are the same size.
4. During fast forward or rewind mode, adjust R289 so that wavelength displayed on the oscilloscope becomes 7msec. Adjustment should be satisfied at any tape winding position.
5. Check that almost equal value of fast winding speed is obtained between fast forward and rewind modes.



Fig. 2-10 Waveform at TP1

2-10 TENSION ARM HEIGHT ADJUSTMENT

1. Thread any standard tape on the deck using a standard empty reels such as TEAC RE-1002.
2. Set the deck in the forward play or fast-forward (fast rewind) mode.
3. Stop left (right) guide roller's rotation by hand.
   Adjust by turning the left (right) tension arm height adjusting nut (refer to Fig. 2-11) so that the tape moves in the center of the guide roller.
4. Release the guide roller. Fine-adjust the adjust nut again so that there is no evident tape curling on the left-most (right-most) tape guide pin of the head assembly.
5. After adjusting the height of both left and right tension arms, check that the tape running condition is good by switching between fast forward and rewind modes.
6. If the tape running position is different when the guide roller stops and when it turns, the condition when the gulde roller is rotating has priority.

Figure shouws left side tension arm.

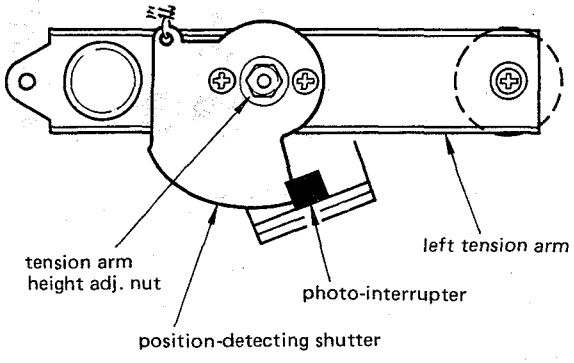

Fig. 2-11

2-11 REEL TABLE HEIGHT ADJUSTMENT

1. Adjust the tension arm height beforehand (See 2-10).
2. Check each reel table height using a TEAC RE-1002 empty reel and letting the tape run in each tape operating mode.
3. If the tape rubs against the reel flanges, adjust the reel table height by means of the two reel table mounting screws.

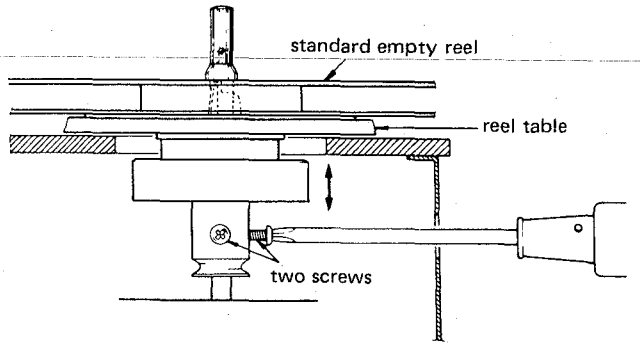

Fig. 2-12

2-12 HEAD AND TAPE PATH ALIGNMENTS

NOTE:
The adjustments referred to in this section are so closely related to one another that it is necessary to re-check the other adjustments after completion of one.

HEAD REGULATION ELEMENTS	EXAMPLE OF MIS-ALIGN-MENT
TILT The head surface should be parallel to the tape guide pin surface.	
AZIMUTH The gap of the head core should be perpendicular to the tape travel.	
HEIGHT (2T) The head cores should be equally distant from the upper and lower eges of the tape.	
HEIGHT (4T) The top edge of the upper core of the head should be level with the upper edge of the tape.	
TANGENCY The dotted line should be perpendicular to the surface of the tape.	

Fig. 2-13 Head regulation elements

Figure shows X-1000M.

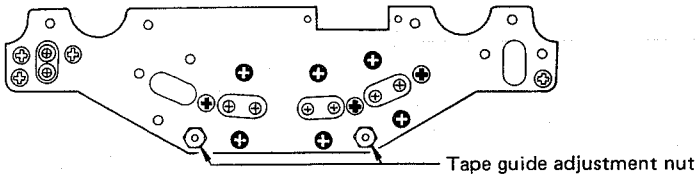

X-1000M	2T Erase	2T Record	2T Play	4T Play
X-1000	4T Erase	4T Record	4T Play	Not mounted

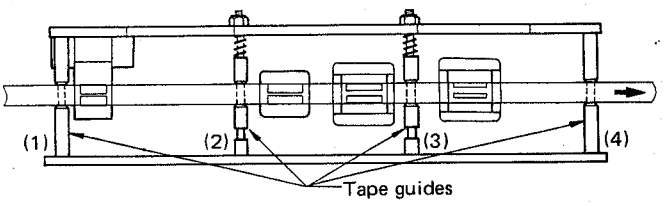

Adjustment screws and nuts

- Head azimuth
- Head height and tilt
- Head mounting
- Tape guide height
- Fixed (not adjustable)

Fig. 2-14 Tape guide and head arrangement

2-12-1 COARSE ADJUSTMENT OF PINCH ROLLER PARALLELISM

The following procedure is for parallelism adjustment of left pinch roller. A similar procedure is also applied for the right pinch roller.

1. Let pinch roller draw near toward capstan shaft by manually lifting up tape lifter shown in Fig. 2-15.
2. Check pinch roller/capstan shaft parallelism viewed from direction of arrow A shown in Fig. 2-15. Refer to Fig. 2-16.
3. If not parallel, loosen the reinforcement plate screw near the correction-required side (Refer to Fig. 2-18), then correct tilt of pinch roller spindle using correction jig. Adjustment can be done by tilting correction jig in direction of arrow A or A'.
   NOTE:
   (1) Use the jig as near as possible to the pinch roller spindle.
   (2) Do not touch the surface of spindle.
   (3) Use no other tool for this adjustment!
4. Remove pinch roller, then push up tape lifter to visually align pinch roller spindle with the capstan shaft viewed from direction of arrow B in Fig. 2-15.
5. If needed, adjust by tilting correction jig in direction of arrow B or B' in Fig. 2-18.

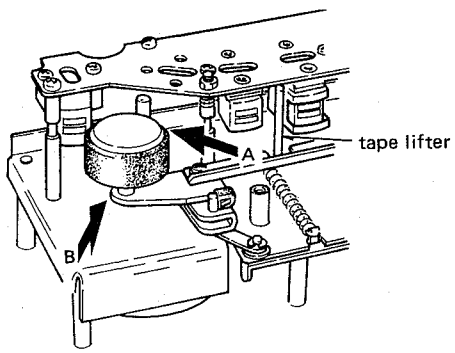

Fig. 2-15 Directions for pinch roller parallelism check



Fig. 2-16 View in direction A (example of non-parallelism)



Fig. 2-17 View in direction B (example of non-parallelism)

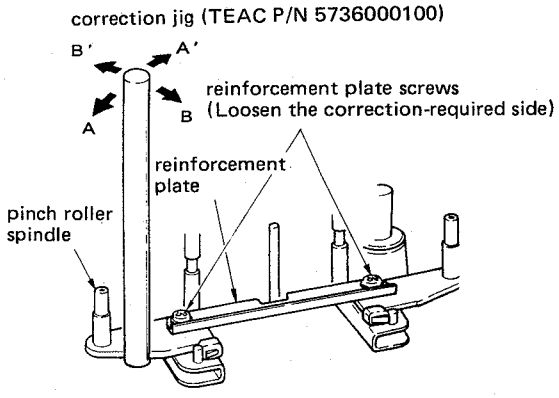

Fig. 2-18 Pinch roller/capstan alignment

2-12-2 HEAD TILT AND AZIMUTH ADJUSTMENT

1. Visually adjust the tilt of playback and record heads so that the head surface is parallel to the nearest tape guide or capstan shaft.
2. Make coarse azimuth adjustments for the record and playback head, viewing each head from front (without tape).

2-12-3 TAPE GUIDE HEIGHT ADJUSTMENT

1. Playing a TEAC YTT-8013 test tape (thickness = 35μm), adjust the height of the left tension arm so that the lower edge of the tape is just touching the lower edge of the tape guide (1). See Fig. 2-19. Also refer to "2-10 TENSION ARM HEIGHT ADJUSTMENT".
2. Adjust the height of the tape guide (2) so that the upper edge of the tape is in contact with the upper edge of the tape guide.
3. Confirm that the adjustments do not cause the tape to curl.
4. Adjust height of tape guides (3) and (4) in the same way as steps 1 ~ 3. For tape guide (4), adjust right tension arm height.
5. Check to see there is no tape curling at all the tape guides.
6. Apply locking paint to the height adjust nut of tape guides (2) and (3).

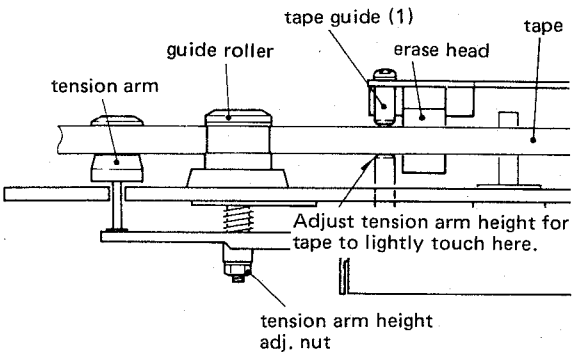

Fig. 2-19 Tension arm height adjustment

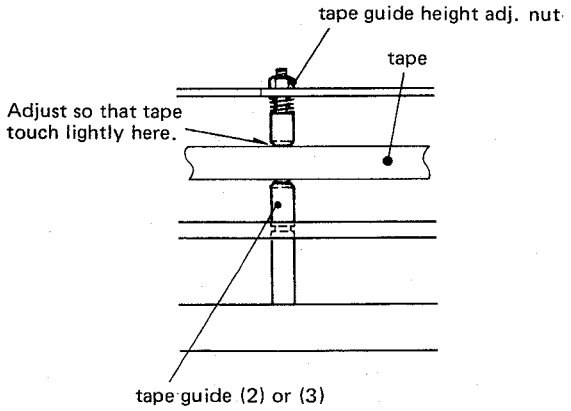

Fig. 2-20 Tape guide height adjustment

2-12-4 FINE ADJUSTMENT OF PINCH ROLLER PARALLELISM

With HIGH tape speed, each pinch roller should satisfy the following requirements.

1. Remove pinch roller cap.
2. Manually move pinch roller upwards (along pinch roller spindle) by 1 ~ 2mm from the stop portion of the spindle, then play a test tape.
3. During play mode, observe whether the pinch roller position changes in the spindle direction.
4. If a change is found, re-adjust accurately tilt of pinch roller spindle by method illustrated in Fig. 2-18.

2-12-5 HEAD HEIGHT ADJUSTMENT

1. On X-1000M model, fine-adjust the height of the 2T record and 2T playback heads so that their head cores are equally distant from the upper and lower edges of the tape.
2. Fine-adjust the height of the 4T record and 4T playback head(s) so that the head's brass-colored spacer shows just above the moving tape (about the thickness of a thin pencil line).

2-13 TAPE SPEED ADJUSTMENT

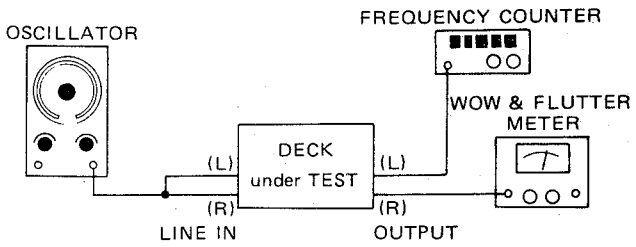

Fig. 2-21

TEAC Tape Speed and Flutter test tapes:

YTT-2004: For 38cm/s (15 ips) speed
YTT-2003: For 19cm/s (7-½ ips) speed
YTT-2002: For 9.5cm/s (3-¾ ips) speed

1. Connect a frequency counter to either OUTPUT terminal.
2. Load a TEAC YTT-2004 (X-1000: YTT-2003) test tape. Set the SPEED switch—HIGH, and PITCH CONT knob—OFF.
3. Play the tape. Adjust HIGH SPEED control (see Fig. 2-22) for a reading of 3,000Hz ±5Hz.
4. Check the following at the beginning and the end of the tape.
   Specifications:
   Tape speed deviation . . . . . 3,000Hz ±30Hz
   Tape speed drift 15Hz
5. Change the test tape to a TEAC YTT-2003 (X-1000: YTT-2002), and SPEED switch setting to LOW.
6. Repeat steps 3 through 4. Adjust LOW SPEED control if necessary.
7. Pull the PITCH CONT knob out. Set SPEED switch HIGH. Play a YTT-2004 (X-1000: YTT-2003) tape.

8. Check if the speed variation of at least 3,000Hz ±180Hz is obtained when the PITCH CONT knob is rotated fully in both directions.
9. Change the test tape to YTT-2003 (X-1000: YTT-2002), SPEED switch setting to LOW. Repeat step 8.

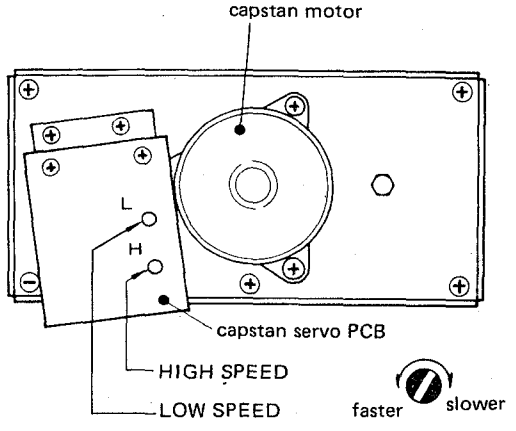

Fig. 2-22

2-14 WOW AND FLUTTER CHECKS

TEAC Tape Speed and Flutter test tapes:
Refer to the beginning of paragraph 2-13.

NOTE: The following measurements should be made at the beginning and the end of the tape.

Playback

1. Connect the test equipment to the deck as shown in Fig. 2-21.
2. Load and play a TEAC YTT-2004 (X-1000: YTT-2003) test tape for HIGH speed.
3. Read the indication on the wow and flutter meter.
4. Repeat steps 2 through 3 using a TEAC YTT-2003 (X-1000: TEAC YTT-2002) tape for LOW speed.
5. Wow and flutter specifications are as shown below.

X-1000M:	HIGH (38cm/s):	0.04% WRMS	0.08% RMS
	LOW (19cm/s):	0.05% WRMS	0.10% RMS
X-1000:	HIGH (19cm/s):	0.05% WRMS	0.10% RMS
	LOW (9.5cm/s):	0.07% WRMS	0.12% RMS

Overall

6. Load a TEAC YTT-8013 test tape (blank). Apply and record a 3,000Hz signal.
7. During simultaneous tape monitoring (playing) the recorded signal, read the wow and flutter meter display.
   Specifications:

X-1000M:	HIGH (38cm/s):	0.10% RMS
	LOW (19cm/s):	0.12% RMS
X-1000:	HIGH (19cm/s):	0.12% RMS
	LOW (9.5cm/s):	0.15% RMS

2-15 LUBRICATION

Oiling is needed after every 1,000 hours of operation or once a year if the deck is infrequently used. For this purpose, TEAC spindle oil (from TEAC TZ-255 oil kit), Mobil D.T.E. Oil Light, etc. are recommended. Lubrication is normally not necessary except at the points shown.

1. Place the deck in the horizontal position.
2. Apply a few drops of oil to the respective spindles shown, excluding capstans, then spread the oil evenly on the spindle surfaces using a cotton cloth, etc.
3. For capstans, apply a few drops to the indicated position.
4. After oiling all the points, leave the deck for 1 to 2 hours until the oil is thoroughly absorbed.

Figure shows left side. Do also for right side.

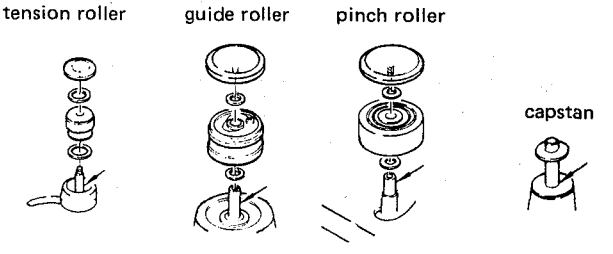

Fig. 2-23

2-16 VOLTAGE CONVERSION (FOR GENERAL EXPORT MODELS)

Always disconnect the power line cord before making these adjustments.

Frequency Conversion
Since the X series uses DC motors, frequency conversion is not necessary.

Voltage Conversion

1. First remove the two feet by removing the screws in each one.
2. Unscrew the left and right sides of the cabinet.
3. Locate the voltage selector above the power transformer as seen from the rear of the deck.
4. Remove the plug by pulling it out, then re-insert it so that the arrow on the plug is parallel with the white line indicating the proper voltage.
5. Replace the cabinet and feet.

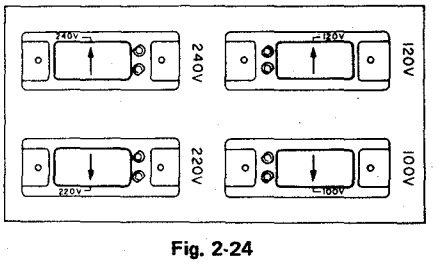

Fig. 2-24

3 ELECTRICAL ADJUSTMENTS AND CHECKS

NOTES:

1. Before performing adjustments and checks, clean and demagnetize the entire tape path.
2. Check that the deck is properly set for the voltage in your locality.
3. In general, adjustments and checks are done in the order of L-ch then R-ch. Double REF. Nos. indicate L-ch/R-ch. (Example: R371/R372)
4. The value of "dB" refers to 0dB (0.775V). If an AC voltmeter calibrated to 0dB (1V) is to be used, appropriate compensation should be made.
5. The AC voltmeter used in the procedures must have an input impedance of 1M-ohms or more.

3-1 MONITOR PERFORMANCE

ITEM		CONNECTION	MODE/ INSTRUCTION	SIGNAL SOURCE	ADJUST (or CHECK)	RESULT	REMARKS
1. Monitor level	1-1	OSC → ATT to LINE IN (L) AC voltmeter to REC AND PLAY AMPL. PCB term. #14.	**DBX sw—OUT (Leave OUT up to step 27, "DBX PERFORMANCE" section).** MONITOR—SOURCE MIC ATT—0 OUTPUT cont.—CAL LINE cont.—MAX MIC cont.—MIN	400Hz/—22dB (61.5mV)	R369	—8dB (308mV)	LINE min. input level (L)
	1-2	"	"	400Hz/—12dB (195mV)	LINE cont. (L/R)	"	LINE spec. input level (L)
	1-3	" but LINE IN (L) → LINE IN (R) #14 → #17	LINE spec. input level condition	"	R370	"	LINE spec. input level (R)
2. Output level	2-1	Fig. 3-1	LINE spec. input level condition	400Hz/—12dB (195mV)	R403/R404	—5dB (436mV)	
3. VU meter	3-1	Fig. 3-1	LINE spec. input level condition	400Hz/—12dB (195mV)	R371/R372	0VU on VU meter	
4. MIC input level	4-1	Fig. 3-1, but LINE IN → MIC	LINE cont.—MIN MIC cont.—MAX	400Hz/—70dB ±2dB (195μV ~ 308μV)	Check	—5dB (436mV)	MIC min. input level
	4-2	"	"	400Hz/—60dB (0.775mV)	MIC cont. (L/R)	"	MIC spec. input level
	4-3	"	MIC cont.—In the above set position MIC ATT—20	"	Check	—25dB ±1dB (38.8mV ~ 48.9mV)	
	4-4	Fig. 3-1	LINE cont.—spec. position (Item 1-2) MIC cont.—MIN MIC ATT—0	—	—	—	**IMPORTANT: Do not disturb these cont's during later checks.**

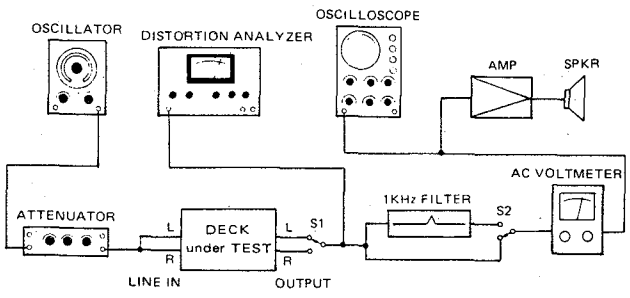

Fig. 3-1 Basic connection

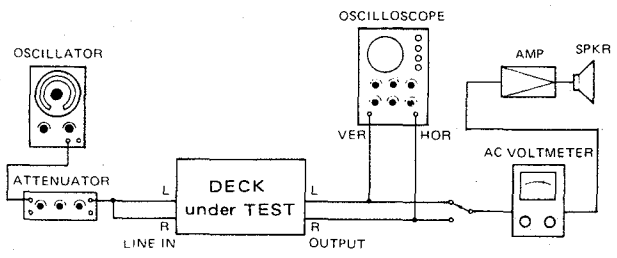

Fig. 3-2 Connection for phase check

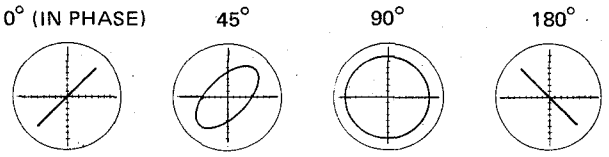

Fig. 3-3 Confirming phase relationship

3-2 PLAYBACK PERFORMANCE

TEAC test tapes:
For playback alignment
YTT-1004: For 38cm/s (15 ips), LH-II
YTT-1003: For 19cm/s (7-½ ips), LH-II
YTT-1002: For 9.5cm/s (3-¾ ips), LH-II
YTT-1054: For 38cm/s (15 ips), EE
YTT-1053: For 19cm/s (7-½ ips), EE
YTT-1052: For 9.5cm/s (3-¾ ips), EE
For recording alignment (blank)
YTT-8013: For LH-II
YTT-8053: For EE

ITEM		CONNECTION	MODE/ INSTRUCTION		SIGNAL SOURCE	ADJUST (or CHECK)	RESULT	REMARKS
5. Playback head azimuth	5-1	Fig. 3-2	MONITOR—TAPE SPEED—19cm/s TAPE sw—LH-II Note: On X-1000M, adjust both 2T and 4T playback heads.		YTT-1003 (16kHz/—10dB)	Azimuth adj. screw/s of head (Fig. 2-14)	Phase: within 45° on oscilloscope (Fig. 3-3)	
6. Playback level	6-1	Fig. 3-1	PLAY HEAD sw [X-1000M] —2T EQ sw [X-1000M] —NAB OUTPUT cont.—CAL SPEED—19cm/s		YTT-1003 (400Hz/0dB)	R313/R314	—5dB (436mV)	Spec. PB condition For EQ switch location, refer to Fig. 3-6.
	6-2	"	OUTPUT cont.—MAX.		"	Check	+1dB ±2dB (690mV ~ 1.09V)	Max. output level
	6-3	"	OUTPUT cont.—CAL		"	—	—5dB (436mV)	Spec. PB condition **IMPORTANT: Do not disturb OUTPUT cont. during later checks.**
	6-4	"	PLAY HEAD sw—4T (Reset to 2T afterwards)		"	Check	—9dB ±2dB (218mV ~ 346mV)	X-1000M only
7. VU meter	7-1	Fig. 3-1	Spec. PB condition		YTT-1003 (400Hz/0dB)	Check	0VU ±1VU on VU meter	
8. Frequency response	8-1	Fig. 3-1	TAPE sw —LH-II	38cm/s	YTT-1004	R327/R328	40Hz ~ 26kHz ±3dB (Ref.: 400Hz)	X-1000M only
	8-2	"		19cm/s	YTT-1003	R333/R334 [X-1000M] R327/R328 [X-1000]	"	
	8-3	"		9.5cm/s	YTT-1002	R333/R334	Fig. 3-4	X-1000 only
	8-4	"	TAPE sw —EE	38cm/s	YTT-1054	Check	40Hz ~ 26kHz ±3dB (Ref.: 400Hz)	
	8-5	"		19cm/s	YTT-1053	"	"	
	8-6	"		9.5cm/s	YTT-1052	"	Fig. 3-4	
9. Phase shift	9-1	Fig. 3-2	TAPE sw—LH-II SPEED—38cm/s		YTT-1004	Check	Phase: within 45° on oscilloscope (50Hz ~ 22kHz) (Fig. 3-3)	
	9-2	"	SPEED—19cm/s		YTT-1003	"	" (50Hz ~ 18kHz)	
	9-3	"	SPEED—9.5cm/s		YTT-1002	"	" (50Hz ~ 10kHz)	
10. PHONES output level	10-1	Fig. 3-5	Spec. PB condition		YTT-1003 (400Hz/0dB)	Check	—24dB ±2dB (38.8mV ~ 61.5mV) (at PHONES jack)	When OUTPUT terminal is at —5dB

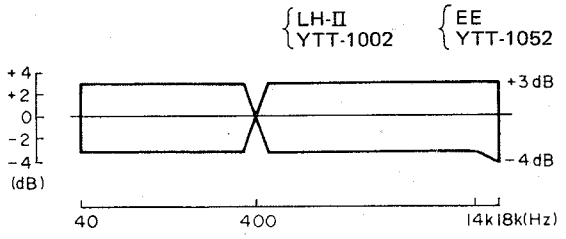

Fig. 3-4 Playback frequency response (9.5cm/s)

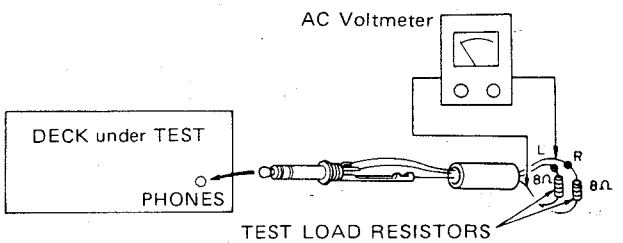

Fig. 3-5 Connection for PHONES level check

ITEM		CONNECTION	MODE/ INSTRUCTION	SIGNAL SOURCE	ADJUST (or CHECK)	RESULT	REMARKS
11. Signal to noise ratio	11-1	Fig. 3-1	LH and EE Spec. PB condition Use fully erased tape (Use bulk tape eraser)	YTT-8013 and YTT-8053	Check	LH-I, -II: 38cm/s 50dB 19cm/s 50dB 9.5cm/s 49dB EE: 38cm/s 52dB 19cm/s 52dB 9.5cm/s 52dB	-Ratio of spec. –5dB to noise -Change-over the polarity of the AC Line plug. The worse reading should be within spec.
12. Frequency response (4T play-back head) [X-1000M]	12-1	Fig. 3-1	TAPE sw–LH-II SPEED–19cm/s PLAY HEAD sw–4T (Reset to 2T after-wards)	YTT-1003	Check	50Hz ~ 14kHz ±7dB (Ref.: 400Hz)	
13. Frequency response (IEC) [X-1000M]	13-1	Fig. 3-1	TAPE sw–LH-II SPEED–38cm/s EQ sw–IEC For EQ switch location, refer to Fig. 3-6	YTT-1004	Check	Level difference against measured value in step 8-1 at each frequency point (3) should be as shown approximately: 63Hz 10kHz 20kHz +2.1dB –2.7dB –3.0dB	
	13-2	**IMPORTANT: After completion of step 13-1, set EQ sw as below: For USA, Canada, Australia and General Export models – NAB position For Europe and U.K. models – IEC position**					

3-3 RECORDING PERFORMANCE

TEAC test tape: YTT-8013: For recording alignment (blank) for LH-II
YTT-8053: For recording alignment (blank) for EE

ITEM		CONNECTION	MODE/ INSTRUCTION		SIGNAL SOURCE	ADJUST (or CHECK)	RESULT	REMARKS
14. Bias trap	14-1	AC voltmeter between BIAS TRAP TP (TP1/ TP2) & GND	Rec-pause mode		–	L303/L304	Min. reading	Bias freq.: 100kHz ±5kHz
	14-2	Fig. 3-1	Rec-pause mode MONITOR–TAPE OUTPUT con.–CAL		–	Check	Min. reading (–45dB or more (4.36mV or less))	
	14-3	"	"		–	Check	VU: no deflec-tion	
15. Record head azimuth	15-1	Fig. 3-2	MONITOR–TAPE SPEED–19cm/s		10kHz/–32dB (19.5mV)	Azimuth adj. screw/s of head (Fig. 2-14)	Phase: within 45° on oscilloscope (Fig. 3-3)	
16. Record bias	16-1	Fig. 3-1	19cm/s [X-1000M] or 9.5cm/s [X-1000]	EE YTT-8053	7kHz/–22dB (61.5mV)	R515/R516	Over-bias value 2.5dB ±1dB (3dB ±1dB for X-1000) from peak	-Simultaneous monitoring -First set adjustor fully CCW (↺), then adjust.
	16-2	"	MONITOR –TAPE	LH-II YTT-8013	"	R519/R520	Over-bias value 3dB ±1dB (4dB ±1dB for X-1000) from peak	

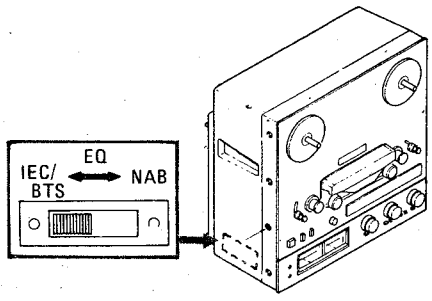

Fig. 3-6 EQ switch location (X-1000M only)

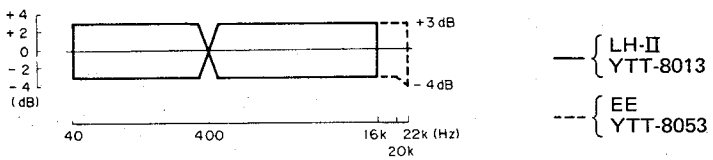

Fig. 3-7 Overall frequency response (9.5cm/s)

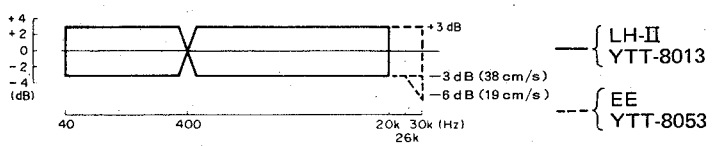

Fig. 3-8 Overall frequency response (38cm/s, 19cm/s)

ITEM		CONNECTION	MODE/ INSTRUCTION		SIGNAL SOURCE	ADJUST (or CHECK)	RESULT	REMARKS
17. Record level	17-1	Fig. 3-1	Same as 16-2 SPEED—19cm/s		400Hz/—12dB (195mV)	R429/R430	—5dB (436mV)	Spec. REC condition
18. Distortion	18-1	Fig. 3-1	Same as 16-1 and 16-2, but SPEED sw —38cm/s [X-1000M] or 19cm/s [X-1000]		1kH/—12dB (195mV)	Check	0.8% or less (w/LH-II, EE)	
19. Signal to noise ratio	19-1	Fig. 3-1	MONITOR—TAPE {LH-II \YTT-8013 {EE \YTT-8053		1kHz/—12dB (195mV) then No signal recording	Check	LH-II: 38cm/s 48dB 19cm/s 48dB 9.5cm/s 46dB EE: 38cm/s 50dB 19cm/s 50dB 9.5cm/s 50dB	Ratio of spec. —5dB to noise
20. Erase efficiency	20-1	Fig. 3-1 switch on 1kHz filter	TAPE sw—EE MONITOR—TAPE SPEED—38cm/s [X-1000M] or 19cm/s [X-1000] TAPE—YTT-8053		1kHz/—2dB (615mV) (+10VU) then erasing	Check	38cm/s: 65dB min. ratio 19cm/s: 70dB min. ratio	-Ratio of 1kHz portion to "no signal" portion -The worst value should be within spec.
21. REC MUTE function	21-1	Fig. 3-1 switch on 1kHz filter	Spec. REC condition Rec-mute mode		1kHz/—2dB (615mV) (+10VU) then record muting	Check	65dB min. ratio	-Ratio of 1kHz portion to "no signal" portion -The worst value should be within spec.
22. Frequency response	22-1	Fig. 3-1	MONITOR —TAPE	9.5cm/s	Required signal/ —32dB (19.5mV)	L305/L306 [X-1000]	Fig. 3-7	Also it is possible to fine-adjust by the record bias adjustors (see item 16.) if this respective specified record bias setting ranges are kept.
	22-2	"	EE YTT-8053	19cm/s	"	Check [X-1000] L305/L306 [X-1000M]	Fig. 3-8	
	22-3	"		38cm/s	"	Check	Fig. 3-8	
	22-4	"	LH-II YTT-8013	9.5cm/s	"	"	Fig. 3-7	
	22-5	"		19cm/s	"	"	Fig. 3-8	
	22-6	"		38cm/s	"	"	Fig. 3-8	
23. Phase shift	23-1	Fig. 3-2	Spec. REC condition SPEED—19cm/s		40Hz ~ 10kHz/ —32dB (19.5mV)	Check	Phase: within 45° on oscilloscope (40Hz ~ 16kHz) (Fig. 3-3)	
24. LH-I position check	24-1	Fig. 3-1	Spec. REC condition Tape—YTT-8013 SPEED—19cm/s		20kHz/—32dB (19.5mV)	Check	When TAPE SELECTOR sw is changed LH-II → LH-I, output level should raise +3dB ±1dB.	
25. Adjacent track crosstalk [X-1000]	25-1	Fig. 3-1	Spec. REC condition SPEED—19cm/s TAPE sw—LH-II		125Hz/—12dB (195mV)	—	—	
	25-2	"	Interchange R & L reels then play.		—	Check	At both L-and R-ch 125Hz: —45dB or more (4.36mV or less) (40dB min. ratio)	
26. Channel separation	26-1	Fig. 3-1 switch on 1kHz filter	Same as 25-1		L: 1kHz/—12dB (195mV) R: No signal record.	Check	R, —55dB or more (1.38mV or less) (50dB min. ratio)	
	26-2	"	"		L: No signal record. R: 1kHz/—12dB	"	L, "	

3-4 DBX PERFORMANCE

NOTE:
Test this performance only after you are sure that the "3-5 DBX PCB ADJUSTMENT is correct.

ITEM		CONNECTION	MODE/ INSTRUCTION	SIGNAL SOURCE	ADJUST (or CHECK)	RESULT	REMARKS
27. Encoder level	27-1	OSC → ATT to LINE IN (both L- & R-ch's) AC voltmeter to REC AND PLAY AMPL. PCB term. #46	DBX sw—OUT MONITOR—SOURCE OUTPUT cont.—CAL LINE cont.—Spec. position (item 1-2) MIC cont.—MIN	1kHz/—12dB (195mV)	Check	—8dB (308mV)	
	27-2	"	Same as above, but DBX sw—IN	"	R737/R738	—8dB ±0.5dB (291mV ~ 327mV)	
	27-3	Repeat 27-1 ~ 27-2 by changing to REC AND PLAY AMPL. PCB term. #47. **IMPORTANT: Do not disturb all MIC, LINE and OUTPUT controls during later checks.**					
28. Decorder level	28-1	Fig. 3-1	Tape—YTT-8013 DBX sw—OUT SPEED—19cm/s REC MODE—ON TAPE sw—LH-II MONITOR—TAPE	1kHz/—12dB (195mV)	Check	Note the measured output as reference.	
	28-2	"	Same as above but DBX sw—IN	"	R637/R638	±0.5dB deviation from ref.	
29. Frequency response	29-1	Fig. 3-1	Same as 22-1 ~ 22-6, but DBX sw—IN EE YTT-8053 } only	Required signal, —32dB (19.5mV)	Check	38cm/s, 19cm/s: 40Hz ~ 20kHz +5, —4dB (Ref.: 400Hz) 9.5cm/s: 40Hz ~ 16kHz +5, —4dB (Ref.: 400Hz)	
30. Signal to noise ratio	30-1	Fig. 3-1	DBX sw—IN REC MODE sw—ON MONITOR—TAPE {LH-II {YTT-8013 {EE {YTT-8053	1kHz/—12dB (195mV) then No signal recording	Check	65dB min. ratio (w/LH-II, EE at all tape speeds)	Ratio of spec. —5dB to noise
31. Distortion	31-1	Fig. 3-1	Same as 30-1 but SPEED—38cm/s [X-1000M] or 19cm/s [X-1000]	1kHz/—12dB (195mV)	Check	0.8% or less (w/LH-II, EE)	0VU input level
	31-2	"	"	1kHz/+8dB (1.95V)	"	3% or less (w/LH-II, EE)	20VU input level

3-5 DBX PCB ADJUSTMENT

NOTES:

1. This section adjustment is not usually needed unless a trimmer(s) has been changed or a component(s) on the DBX PCB has sustained damage, since the PCB has been precisely adjusted in the factory.
2. Disconnect all connectors on the DBX PCB, except for J501/P501. Turn the deck OFF to prevent accidental damage when disconnecting or reconnecting.



Fig. 3-9 RMS symmetry adjustment (incorrect)



Fig. 3-10 RMS symmetry adjustment (correct)

3-5-1 ENCODER ADJUSTMENT

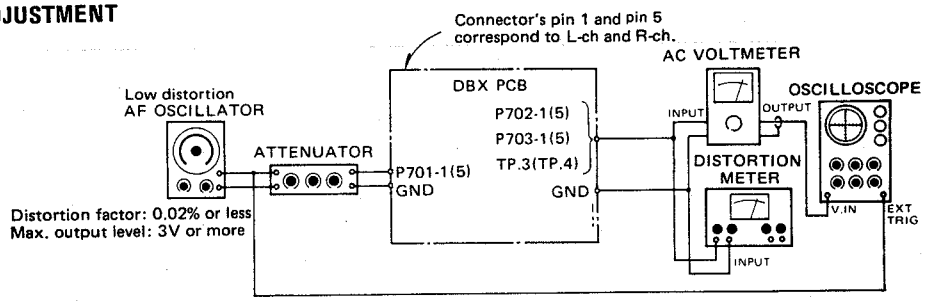

Fig. 3-11 Encoder adjustment setup

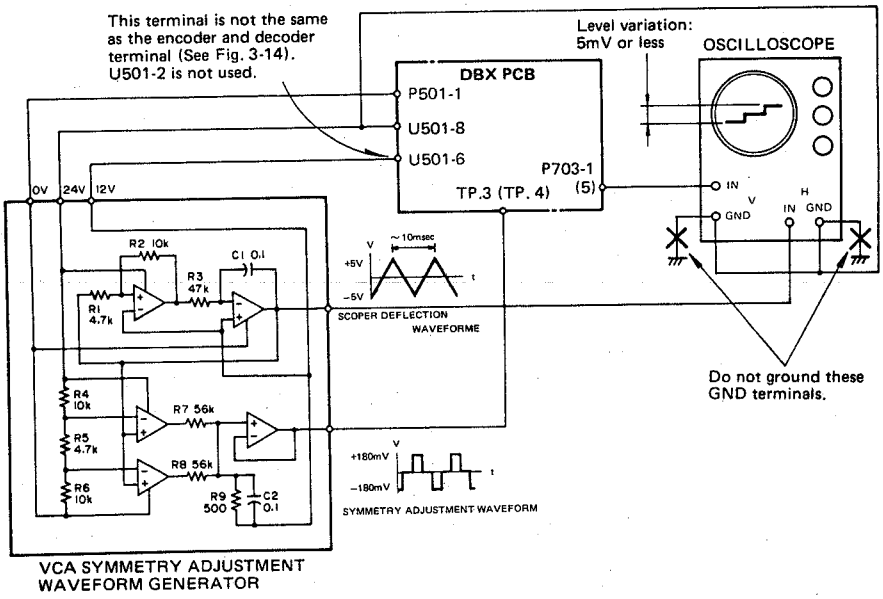

Fig. 3-12 VCA symmetry adjustment setup (encoder)

ITEM	STEP	INPUT INSTRUCTION	ADJUST (or CHECK)	MEASURING POINT: RESULT	REMARKS
1. Preparation	1	Prepare test setup as shown on Fig. 3-11.			
	2	Preset each of the trimmers of the encoder section on the PCB to their approximate center positions.			
2. Input setting	3	Apply 100Hz level to get RESULT value.	Attenuator	P702-1(5): 300mV (–8.2dB)	
3. RMS symmetry	4		R765/R766	TP3(TP4): Clean 200Hz sine-wave	Refer to Figs. 3-9 and 3-10.
4. RMS time constant	5		Check	TP3(TP4): 385μV (–66.1dB) ±20%	
5. Encoder nominal level	6	Apply 1kHz level to get RESULT value.	Attenuator	P702-1(5): 300mV (–8.2dB)	
	7		R737/R738	P703-1(5): 300mV (–8.2dB)*1	*1 Reference 1
6. VCA symmetry	8	Change test setup to as Fig. 3-12, then adjust.	R757/R758	P703-1(5): A relatively straight horizontal line on the 'scope face'. (Level variation: 5mV or less)	

ITEM	STEP	INPUT INSTRUCTION	ADJUST (or CHECK)	MEASURING POINT: RESULT	REMARKS
7. Frequency response (X-1000M)	9	Return to Fig.3-11 test setup. Change oscillator frequency to 100Hz.	Check	P703-1(5): −2.5dB ±0.5dB against Ref. 1. (212mV ~ 238mV)	
	10	Change oscillator frequency to 10kHz.	Check	P703-1(5): −4.7dB ±0.5dB against Ref. 1. (165mV ~ 185mV)	
8. Frequency response (X-1000)	11	Change oscillator frequency to 100Hz.	Check	P703-1(5): +0.5dB ±0.5dB against Ref. 1. (300mV ~ 337mV)	
	12	Change oscillator frequency to 10kHz.	Check	P703-1(5): −3.2dB ±0.5dB against Ref. 1. (196mV ~ 220mV)	
9. Encoder effect-1	13	Apply 1kHz level*2 to get RESULT value.	Attenuator	P702-1(5): 300mV (−8.2dB)	*2 Reference 2
	14	Apply 1kHz at −60dB against Ref. 2.	Check	P703-1(5): −30dB ±0.5dB against Ref. 1. (8.96mV ~ 10.1mV)	
10. Encoder effect-2	15	Apply 1kHz at +20dB against Ref. 2.	Check	P703-1(5): +10dB ±0.5dB against Ref. 1. (0.896V ~ 1.01V) Distortion: 0.3% or less	

3-5-2 DECODER ADJUSTMENT

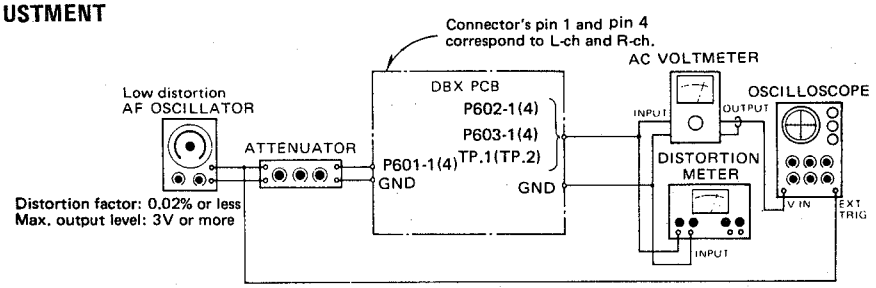

Fig. 3-13 Decoder adjustment setup

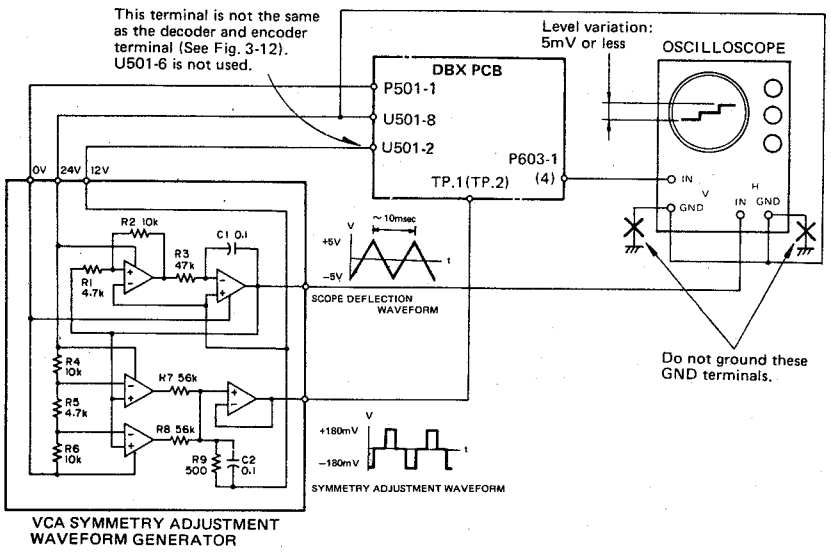

Fig. 3-14 VCA symmetry adjustment setup (decoder)

ITEM	STEP	INPUT INSTRUCTION	ADJUST (or CHECK)	MEASURING POINT: RESULT	REMARKS
1. Preparation	1	Prepare test setup as shown on Fig. 3-13.			
	2	Preset each of the trimmers of the decoder section on the PCB to their approximate center positions.			
2. Input setting	3	Apply 100Hz level to get RESULT value.	Attenuator	P602-1(4): 300mV (−8.2dB)	
3. RMS symmetry	4		R665/R666	TP1(TP2): Clean 200Hz sine-wave	Refer to Figs. 3-9 and 3-10.
4. RMS time constant	5		Check	TP1(TP2): 385μV (−66.1dB) ±20%	
5. Decoder nominal level	6	Apply 1kHz level to get RESULT value.	Attenuator	P602-1(4): 300mV (−8.2dB)	
	7		R637/R638	P603-1(4): 300mV (−8.2dB) *1	*1 Reference 1
6. VCA symmetry	8	Change test setup to as Fig. 3-14 then adjust.	R657/R658	P603-1(4): A relatively straight horizontal line on the 'scope face'. (Level variation: 5mV or less)	
7. Frequency response (X-1000M)	9	Return to Fig. 3-13 test setup. Change oscillator frequency to 100Hz.	Check	P603-1(4): +5dB ±1dB against Ref. 1. (476mV ~ 599mV)	
	10	Change oscillator frequency to 10kHz.	Check	P603-1(4): +9.4dB ±1dB against Ref. 1. (789mV ~ 994mV)	
8. Frequency response (X-1000)	11	Change oscillator frequency to 100Hz.	Check	P603-1(4): −0.3dB ±1dB against Ref. 1. (258mV ~ 325mV)	
	12	Change oscillator frequency to 10kHz.	Check	P603-1(4): +3.2dB ±1dB against Ref. 1. (387mV ~ 487mV)	
9. Decoder effect-1	13	Apply 1kHz level *2 to get RESULT value.	Attenuator	P602-1(4): 300mV (−8.2dB)	*2 Reference 2
	14	Apply 1kHz at −30dB against Ref. 2.	Check	P603-1(4): −60dB ±1dB against Ref. 1. (267μV ~ 337μV)	
10. Decoder effect-2	15	Apply 1kHz at +10dB against Ref. 2.	Check	P603-1(4): +20dB ±1dB against Ref. 1. (2.67V ~ 3.37V) Distortion: 0.2% or less	

3-6 ADJUSTMENT AND TEST POINT LOCATIONS

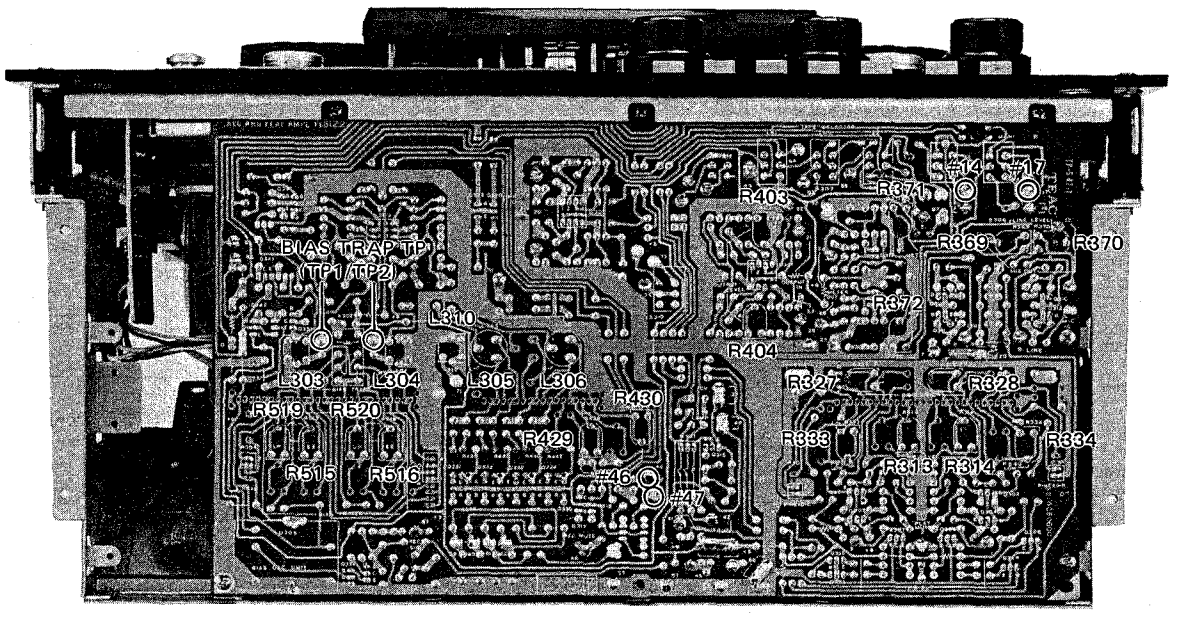

Fig. 3-15 REC AND PLAY AMP PCB

L303/L304	Bias trap (record)
L305/L306	Record EQ
L310	Dummy Coil
R313/R314	Playback level
R327/R328	Playback EQ (HIGH)
R333/R334	Playback EQ (LOW)

R369/R370	Monitor level
R371/R372	VU meter
R403/R404	Output level
R429/R430	Record level
R515/R516	Record bias (EE)
R519/R520	Record bias (LH II)

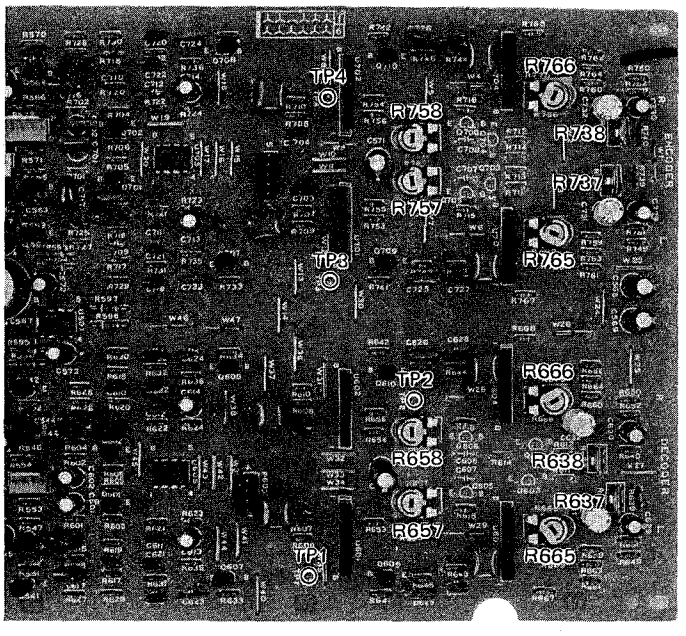

Fig. 3-16 DBX PCB

R637/R638	Nominal level (DECODER)
R657/R658	VCA symmetry (DECODER)
R665/R666	RMS symmetry (DECODER)
R737/R738	Nominal level (ENCODER)
R757/R758	VCA symmetry (ENCODER)
R765/R766	RMS symmetry (ENCODER)

注意１．プリント基板図はパターン面が示されています．
２．＊印の部品は納期が若干かかります，あらかじめご了承下さい．
３．⚠印は安全規格重要部品です．交換するときは必ずティアック指定の部品を使用して下さい．

※ dbxおよびdbxマークはdbxインコーポレーテッドの登録商標です．
※ dbxシステムはdbxインコーポレーテッドの実施権に基づいて製造されています．

機構部の調整

<table>
<tr><th>番号</th><th>調整項目</th><th colspan="5">サービスデータ</th><th>備考</th></tr>
<tr><td rowspan="3">1</td><td rowspan="3">ブレーキトルク</td><td></td><td colspan="2">正方向</td><td>負方向</td><td>左右差</td><td rowspan="3">単位 kg・cm
(トルク)は参考値
ブレーキ位置調整方法 1項参照</td></tr>
<tr><td>右 リール</td><td colspan="2">1.2～1.9</td><td>(0.7)</td><td rowspan="2">0.2以内</td></tr>
<tr><td>左 リール</td><td colspan="2">1.2～1.9</td><td>(0.7)</td></tr>
<tr><td>2</td><td>ピンチローラポーズ位置</td><td colspan="5">ポーズ時の，キャプスタンとピンチローラ間のすき間 0.5～1 mm</td><td>調整方法 2項参照</td></tr>
<tr><td>3</td><td>ピンチローラ圧着ストローク</td><td colspan="5">プレイ時，ピンチローラアームストップピンと，ストップラバーのすき間約1mm
(左・右いずれか一方にのみすき間を生ずるので，すき間のある側を調整)</td><td>調整方法 3項参照</td></tr>
<tr><td>4</td><td>ピンテローラ圧着力</td><td colspan="5">左 右 共 1.35kg～1.9kg</td><td>引張法による
無調整・参考値</td></tr>
<tr><td rowspan="3">5</td><td rowspan="3">テープ・テンション</td><td>モード
テンション</td><td colspan="2">PLAY</td><td>FF</td><td>REW</td><td rowspan="3">テンテロ・メータ使用
単位 g
調整方法 4項参照</td></tr>
<tr><td>ティクアップ側</td><td colspan="2">50±10</td><td>110±10</td><td>110±10</td></tr>
<tr><td>サプライ側</td><td colspan="2">50±10</td><td>－</td><td>－</td></tr>
<tr><td rowspan="4">6</td><td rowspan="4">テープ・スピード</td><td rowspan="3">PLAY</td><td colspan="2">テープ速度偏差</td><td colspan="2">3,000Hz±30Hz</td><td>調整方法 5項参照</td></tr>
<tr><td colspan="2">テープ速度変動幅</td><td colspan="2">15Hz以内</td><td rowspan="2">無調整・参考値</td></tr>
<tr><td colspan="2">ピッチ・コントロール可変範囲</td><td colspan="2">3,000Hz±180Hz以上</td></tr>
<tr><td>FF, REW</td><td colspan="2">－</td><td colspan="2">－</td><td>仕様・調整方法 5項参照</td></tr>
<tr><td>7</td><td>リール台高さ</td><td colspan="5">RE-702を使用し，テープがリールのフランジに触れないこと．</td><td>調整は，テンション・アーム高さの調整後に行なうこと．</td></tr>
<tr><td>8</td><td>各回転体の
スラスト・クリアランス・チェック</td><td colspan="5">キャプスタン・シャフト 0.1～0.25mm(マグネット式)
ガイド・ローラ 0.05～0.3mm
テンションアームガイドローラ 0.05～0.3mm
リールモータ 0 (スプリング式)
左・右テンションアーム 0 (スプリング式)</td><td>無調整・参考値
キャプスタン・シャフトはマグネフロートタイプの為，定常回転中はスラスト受け方向（デッキ後面方向）に押されている事を確認すること．</td></tr>
<tr><td rowspan="3">9</td><td rowspan="3">ワウ・フラッタ</td><td></td><td colspan="2">再生法</td><td colspan="2">録再法</td><td rowspan="3">単位 %
7号リール使用時の巻始め及び巻終りを測定．</td></tr>
<tr><td>テープ速度</td><td>RMS</td><td>WRMS</td><td colspan="2">RMS</td></tr>
<tr><td>38cm/s
19cm/s</td><td>0.08
0.10</td><td>0.04
0.05</td><td colspan="2">0.10
0.12</td></tr>
<tr><td>10</td><td>早巻き時間</td><td colspan="5">F.F, REW共
YTT-8013 (550m) にて 60秒以内</td><td>無調整・参考値</td></tr>
<tr><td>11</td><td>タイマ起動時間</td><td colspan="5">2～6秒</td><td>無調整・参考値</td></tr>
<tr><td>12</td><td>ヘッド調整とテープ走行系調整</td><td colspan="5">7項参照</td><td></td></tr>
</table>

調整方法・調整個所

機構部の調整・チェックには次の機器が必要です。

測定器

1. テンテロ・メータ……テープ・テンション測定
   ・米国　テンテル社製
   MODEL　T2－H20－1　（0～600g）
   又は　T2－H15－UM（0～450g）
2. バネばかり……ピンチ・ローラ圧着力，ブレーキ・トルク測定
3. ワウ・フラッタ・メータ……ワウ・フラッタ，テープ速度測定・周波数カウンタ付
4. 周波数カウンタ……テープ速度測定
5. オシロスコープ……テープ早送りスピード測定

テープ

1. ワウ・フラッタ，テープ・スピード測定用
   YTT－2004……38cm/sec
   YTT－2003……19cm/sec
2. テープ・テンションその他の測定用
   YTT－8013 又は同等品

1.ブレーキ調整

(1) ブレーキがかかった状態(ブレーキ・ソレノイドOFF)で、ブレーキ・アームのスキマAとスキマBとが等しくなる(ブレーキ・アーム上縁が水平になる)ように、Cの取付け位置を調整する。

(2) 次に、ブレーキ・ソレノイドをON・OFFしたときのプランジャのストロークが約2㎜になるように、ブレーキ・ソレノイドの取付け位置を調整する。

(3) ブレーキ・ソレノイドON状態の時、ブレーキ・ドラムとブレーキ・フェルトとが接触しないように、ブレーキ・バンド受けの取付け位置を調整する。

(4) 調整後、すべてのテープ操作に於て、テンション落ち，テープ巻込み等が生じないことを確認する。

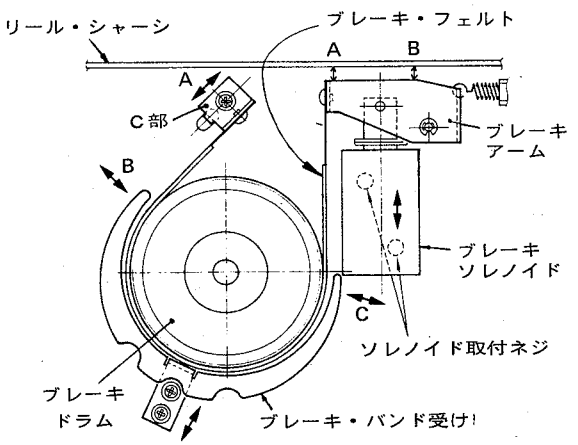

図1　ブレーキ調整

2.ピンチ・ローラ・ポーズ位置調整

デッキをポーズ状態にし、ポーズ位置調整ナットにより、キャプスタンとピンチローラ間のすき間を0.5～1.0㎜に調整する。キャプスタンとピンチローラのすき間は、左右で差を生ずるが、調整はすき間の少ない側のみ行なう。調整後PLAY→PAUSE，STOP→PAUSEを何回か行ない、すき間を確認すること。

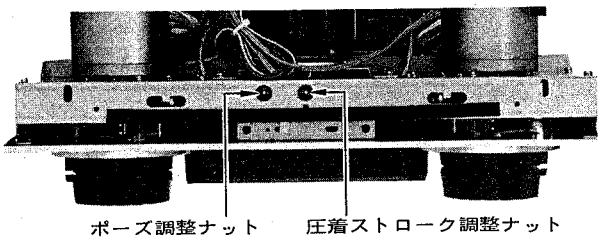

図2　ポーズ位置及び圧着ストローク調整個所

3．ピンチローラ圧着ストローク調整

調整時のデッキの作動モード……PLAY

図2に示す圧着ストローク調整ナットにより、図3に示すようにピンとストッププラバーのすき間を約1㎜に調整する（ピンとストッププラバーが離れていて、すき間が確認出来れば良い）。

このすき間は、圧着スプリングのバラツキにより、左右いずれか一方にしか出来ないが、すき間の出来た側のみ調整すれば良い。

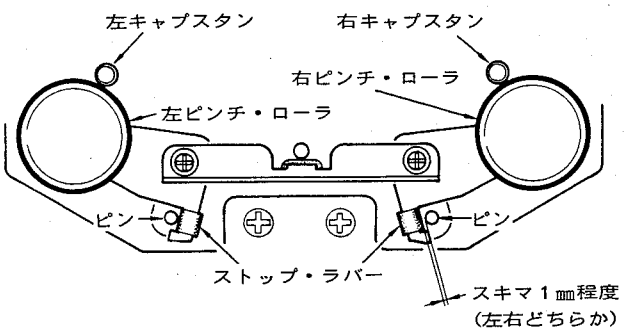

図3　ピンチ・ローラ圧着調整

4.テープ・テンション調整

テープ・テンション調整は、デッキの電源ON後5～10分以上経過してから行ってください。

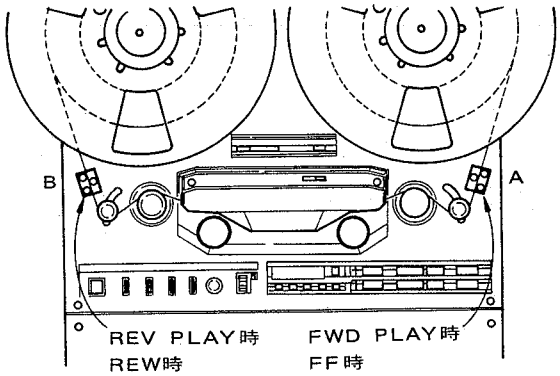

図4　テープ・テンション測定位置

PLAYテンション調整

(1) テープ(7号リール，10号リールどちらでもよい)をかけ、左右同程度の巻径にする。
(2) テープをLOW SPEED(19㎝/sec)，FWD PLAYモードで走行させる。
(3) Aの位置にテンテロ・メータを当て、R120をまわしてテンションを50g±10g(できるだけ50gに近い値)に調整する。

FFテンション調整

(1) サプライ側のリール(左リール)を固定してFFモードにする(テープを走行させない状態に保つ)。
(2) Aの位置にテンテロ・メータを当て、R237をまわしてテンションを110g±10g(できるだけ110gに近い値)に調整する。

参考：FF(REW)時のサプライ側テープ・テンション(バック・テンション)は、次ページに述べるFF(REW)テープ・スピード調整により自動的にセットされます。

REWテンション調整

(1) サプライ側のリール(右リール)を固定してREWモードにする(テープを走行させない状態に保つ)。
(2) Bの位置にテンテロ・メータを当て、R238をまわしてテンションを110g±10g(できるだけ110gに近い値)に調整する。

注：FFとREWのテンションはできるかぎり等しくする。

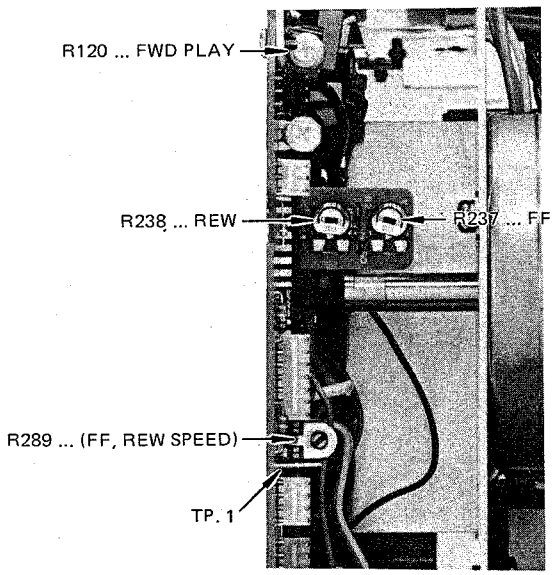

図5　テープ・テンション調整個所

5.テープ・スピード調整

PLAYスピード

調整個所　図6参照

テープ・スピード調整時は、ピッチ・コントロール・スイッチをOFFにしておくこと。

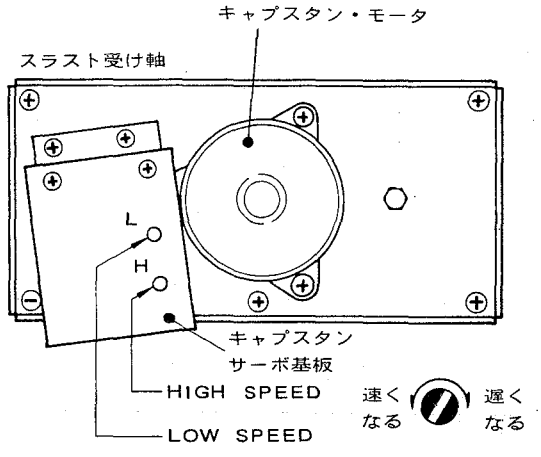

図6　PLAYスピード調整個所

FF/REWスピード

(1) パワー/サーボ基板のTP.1(図5参照)にオシロスコープを接続する。

(2) デッキをFFモード又はREWモードにする。

(3) TP.1の波形の波長が7msecになるようにR289(図5参照)を調整する……図7

(4) FFとREWで大きな差がないことを確認する。

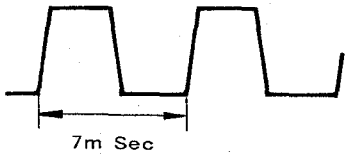

図7　TP.1の波形

6．NAB-BTSイコライザの切換

本機のイコライザイゼーションは〝NAB規格〟3180μs＋50μs(38cm/s，19cm/s共)で定数設定されていますが、〝BTS規格〟3180μs＋35μs(38cm/s)，3180μs＋50μs(19cm/s)に定数変更する場合は下記の手順で行います。(但し、このEQスイッチはTAPE SELECTORスイッチがLH－Ⅰ又はLH－Ⅱのみ有効です)

（1）本製ケースを外す。

（2）ボンネットを外す。

（3）EQスイッチをIEC/BTS側にセットする。

（4）ボンネットと本製ケースを元に戻す。

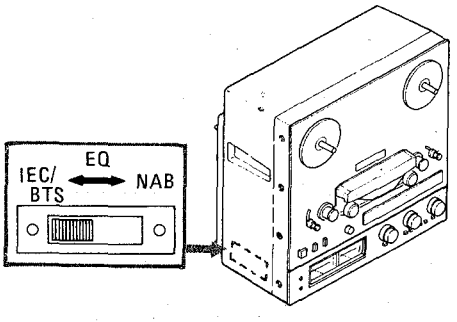

図8　NAB－BTSイコライザの切換

7．ヘッド調整とテープ走行調整

調整の前に、ピンチ・ローラ，キャプスタン・シャフト，ヘッド及びテープ・ガイドをクリーナ液で充分に清掃して下さい。

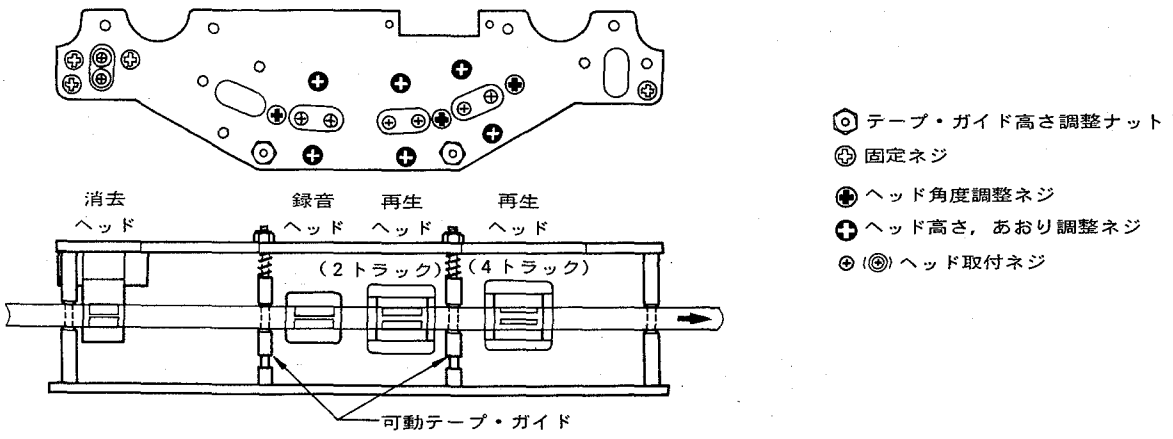

図9　テープ・ガイド及びヘッドの配列

7－1．ピンチ・ローラ平行度の仮調整

ピンチ・ローラとキャプスタン・シャフトとの平行度は、テープ走行の安定に最も重要な事項です。
以下に左ピンチ・ローラの平行度調整の手順を述べますが、右ピンチ・ローラについても同様に調整して下さい。

- 図10に示すテープ・リフタを手で押し上げ、ピンチ・ローラをキャプスタン・シャフトに近づける。
- 図10に示すA方向から見て、ピンチ・ローラとキャプスタン・シャフトの平行度をチェックする。（図11）
- 平行でない場合は、調整棒を使用して図13に示すA又はA′方向にピンチ・ローラ軸の傾きを修正する。（調整棒は出来るだけピンチ・ローラ軸に近い位置にセットして下さい。）
- 次にピンチ・ローラを外し、テープ・リフタを上げ、図10のB方向から見てピンチ・ローラとキャプスタン・シャフトの平行度をチェックする。
- 平行でない場合は、調整棒を使用して図13に示すB又はB′方向にピンチ・ローラ軸の傾きを修正する。（調整棒　品番 5736000100 ）

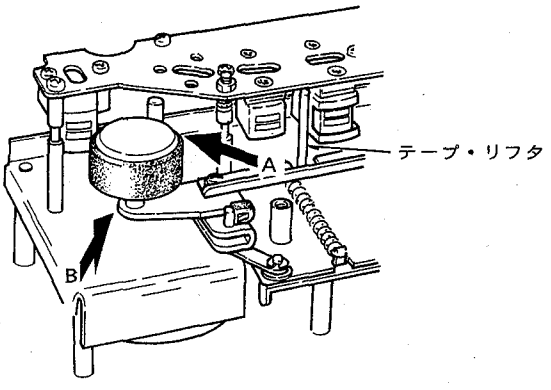

図10　平行度のチェック方向



図11　A視図（平行でない例）



図12　B視図（平行でない例）

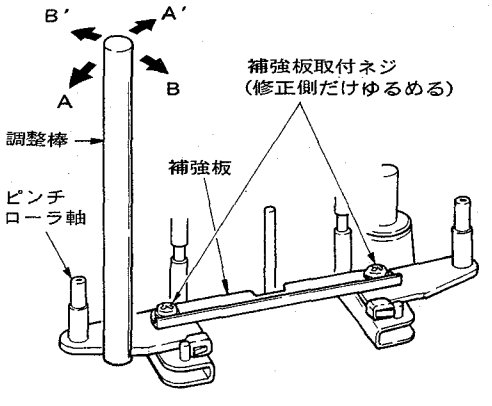

図13　ピンチ・ローラ軸傾きの修正

7－2．ヘッドのあおり仮調整

各録音ヘッド，再生ヘッドのあおりを仮調整します。
（本調整はアンプ部の調整時に行なって下さい。）

- 再生ヘッドは、ヘッド前面と可変テープ・ガイドのテープ走行部とが平行になるよう調整。(図14)
- 録音ヘッドは、ヘッド前面とキャプスタン・シャフトとが平行になるよう調整。(図15)



図14　再生ヘッドのあおり調整

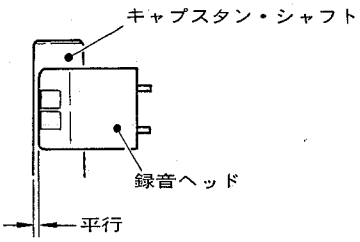

図15　録再ヘッドのあおり調整

7－3．テープ・ガイドの高さ調整

テープをPLAY状態で走行させながら、各テープ・ガイドでテープがカールしないように調整します。

- 消去ヘッド外側のテープ・ガイドの下側にテープがカールしない程度に軽く接触するようテンション・アームの高さを調整する。(図16)
- 可動テープ・ガイドは、ガイド上側にテープがカールしない程度に軽く接触するよう高さを調整する。(図17)（調整後ネジ・ロック塗付のこと）。

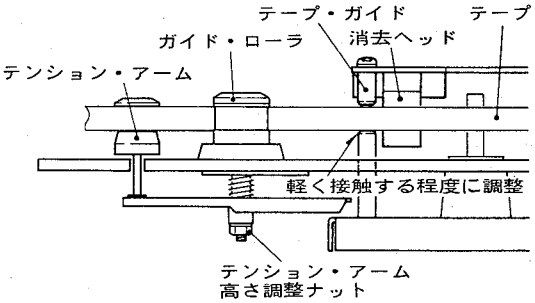

図16　テンション・アーム高さ調整

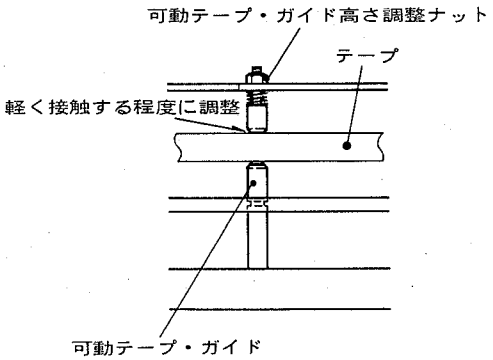

図17　可動テープ・ガイド高さ調整

7－4．ピンチ・ローラ平行度微調整

テープ速度をHIGHにし、PLAY状態でチェックして下さい。

- ピンチ・ローラ・キャップを外す。
- ピンチ・ローラを1～2㎜引き抜き、デッキをプレイ状態にする。
- プレイ中、ピンチ・ローラの位置が軸方向に移動するかどうかチェックする。
- 移動する場合は、図13の方法でピンチ・ローラ軸の傾きを微調整する。

アンプ部の調整個所

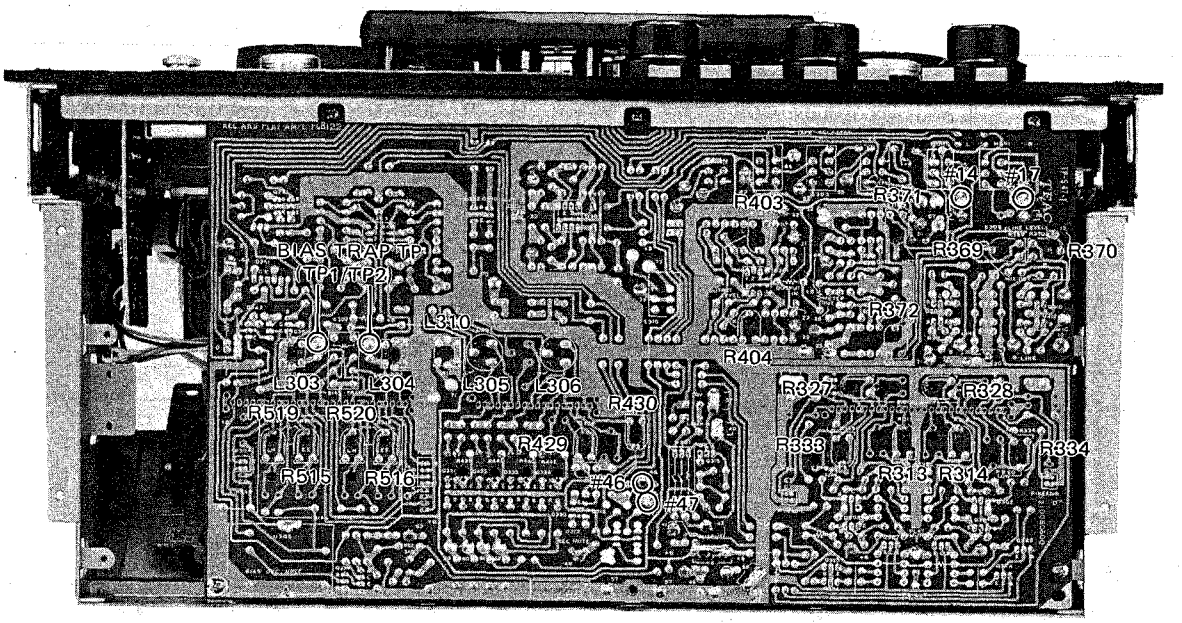

図18　録・再基板調整個所

L303/L304	バイアス・トラップ	R369/R370	モニタ・レベル
L305/L306	録音イコライザ	R371/R372	VUメータ
R313/R314	再生レベル	R403/R404	出力レベル
R327/R328	再生イコライザHIGH	R429/R430	録音レベル
R333/R334	再生イコライザLOW	R515/R516	録音バイアスEE
L310	ダミーコイル	R519/R520	録音バイアスLH Ⅱ

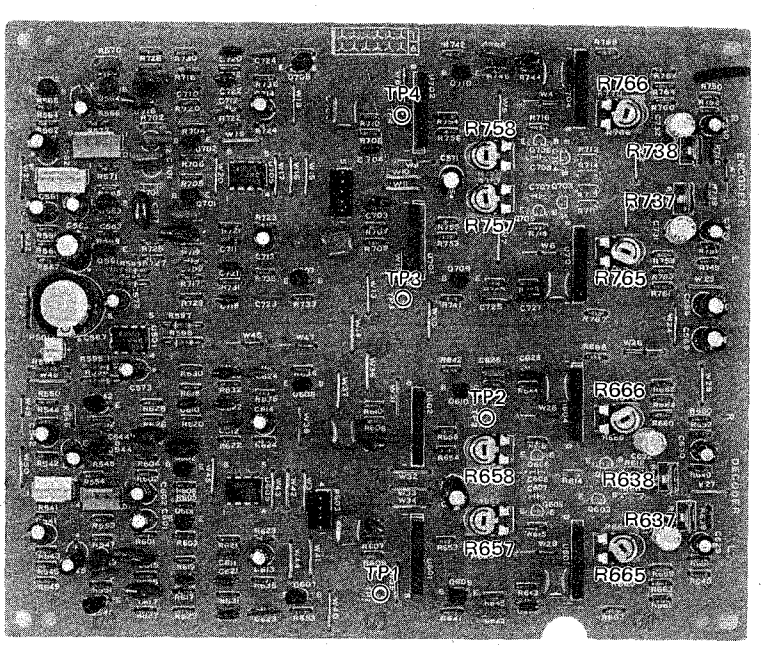

図19　DBX基板調整個所

アンプ部の調整

モニタ系 (DBXスイッチ：OUT)

0dB＝0.775V

調整項目		準備・設定	入力信号	調整個所	測定個所・調整値	備考
1．モニタレベルセット	1-1	MONITORスイッチSOURCE OUTPUT つまみ CAL LINE つまみ 最大 MIC つまみ 最小	LINE IN −22dB/400Hz	R369(Lch)	REC AND PLAY AMPL PCB＃14 −8dB	LINE IN (Lch) 最大感度
	1-2	同 上	LINE IN −12dB/400Hz	LINEつまみ(L/R)	同 上 −8dB	LINE 規定入力 (L)
	1-3	LINE 規定入力状態	同 上	R370(Rch)	同 上 PCB＃17 −8dB	LINE 規定入力 (R)
2．モニタ出力レベルセット	2-1	同 上	同 上	R403/R404	OUTPUT −5dB	
3．モニタVUメータレベルセット	3-1	同 上	同 上	R371/R372	VUメータ 0VU	
4．MICレベルセット	4-1	LINE つまみ 最小 MIC つまみ 最大	MIC −70dB/400Hz	チェック	OUTPUT −7dB〜−3dB	MIC最大感度
	4-2	同 上	MIC −60dB/400Hz	MIC つまみ	OUTPUT −5dB	MIC規定入力

再生系 (特に指示のない時はTAPE SELECTORスイッチはLH-II，PLAYBACK HEADスイッチは2T)

0dB＝0.775V

調整項目		準備・設定	入力信号	調整個所	測定個所・調整値	備考
5．再生レベルセット	5-1	MONITORスイッチ TAPE OUTPUT つまみ CAL テープスピード LOW モード PLAY	YTT-1003 (400Hz/0dB)	R313/R314	OUTPUT −5dB	規定再生状態
	5-2	OUTPUT つまみ 最大	YTT-1004(400Hz/0dB)	チェック	OUTPUT −1dB〜＋3dB	最大出力レベル
	5-3	OUTPUT つまみ CAL	YTT-1003(400Hz/0dB)	−	OUTPUT −5dB	規定再生状態
6．VU計レベルセット	6-1	規定再生状態	YTT-1003(400Hz/0dB)	チェック	VUメータ 0VU±1VU	
7．4Tヘッドレベル	7-1	規定再生状態 モード PLAY	規定再生状態 モード PLAY	チェック	OUTPUT −9dB±2dB	PLAYBACKスイッチ
8．再生周波数特性	8-1	38cm/s PLAY	YTT-1004 (LH II)	R327/R328	40〜26k Hz ±3dB	400Hzを 0dBとする．
	8-2	19cm/s PLAY	YTT-1003 (LH II)	R333/R334	40〜26k Hz ±3dB	
	8-3	38cm/s PLAY	YTT-1004 (EE)	チェック	OUTPUT：TAPE SELECTOR スイッチをEEに切換えた時20k Hzのレベルの下降 3dB±1dB	
	8-4	19cm/s PLAY	YTT-1003 (EE)	チェック		
	8-5	PLAYBACK HEAD 4T 19cm/s PLAY	YTT-1003 (LH II)	チェック	50〜14k Hz ±7dB	
9．再生位相ずれ	9-1	38cm/s PLAY	YTT-1004 (LH II)	チェック	50〜22k Hz 45°以内	
	9-2	19cm/s PLAY	YTT-1003 (LH II)	チェック	50〜18k Hz 45°以内	
10．ヘッドホン出力	10-1	規定再生状態 PHONES ジャックに8Ωのダミー抵抗を接続	YTT-1003(400Hz/0dB)	チェック	抵抗両端 −24dB±2dB	OUTPUT −5dBの時
11．再生S・N比	11-1	規定再生状態 生テープ又はバルク・イレーサで十分に消磁したテープ	YTT-8013 (LH II) YTT-8053 (EE)	チェック	LH II 50dB以上 EE 52dB以上	電源極性の影響については悪い方の値が規格を満足すること． (基準−5dB)

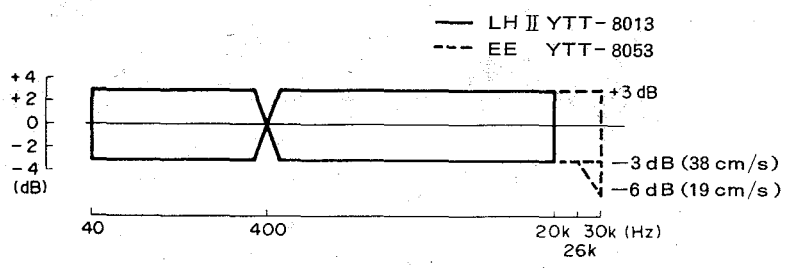

図20 録再周波数特性（38 cm/s，19 cm/s）

録　音　系

(特に指示のない時はTAPE SELECTORスイッチはLH-II, PLAYBACK HEADは2T)　　0dB＝0.775V

調整項目		準備・設定	入力信号	調整個所	測定個所・調整値	備考
12. バイアストラップ調整	12-1	モード　REC/PAUSE		L303/L304	T.P.1又はT.P.2 － GND間 バイアス漏れ　最小	バイアス周波数 100kHz±5kHz
	12-2	モード　REC/PAUSE MONITOR スイッチ TAPE OUTPUT つまみ CAL		チェック	OUTPUT バイアス漏れ　－45dB以下	
	12-3	同　上		チェック	VU計　振れないこと	
13. BIASセット	13-1	テストテープ YTT-8053 YTT-8013 テープスピード　19cm/S MONITOR スイッチ TAPE LINE つまみ 規定位置	LINE IN －22dB/7kHz	EE R515/R516 LH II R519/R520	同時モニタ OUTPUT オーバーバイアス値 2.5dB±1dB (EE) 3dB±1dB (LH II)	
14. 録音レベルセット	14-1	同　上 テストテープ YTT-8013 テープスピード　19cm/s	LINE IN －12dB/400Hz	R429/R430	OUTPUT　－5dB	規定録音状態
15. 歪み率チェック	15-1	規定録音状態	LINE IN －12dB/1kHz	－	OUTPUT　0.8%以下	EE, LH II共
16. 総合S・N比	16-1	規定録音状態 テープスピード　38cm/s 19cm/s	無信号	チェック	OUTPUT LH II　48dB以上 EE　50dB以上	基準レベルは －5dB
17. 消去率	17-1	規定録音状態 テープスピード　19cm/s テープ　YTT-8053	LINE IN －2dB/1kHz (＋10VU) 録音後消去	EE チェック	OUTPUT (消去率　65dB以上)	1kHz. BPF使用
18. REC MUTE効果	18-1	規定録音状態 モード　REC/MUTE	LINE IN －2dB/1kHz (＋10VU)	チェック	OUTPUT　－60dB以下 (MUTE効果 65dB以上)	
19. 総合周波数特性	19-1	規定録音状態 テープスピード　19cm/s	LINE IN －32dB/40～30k Hz	L305/L306	OUTPUT 図20	YTT-8053(EE)で調整400Hzを0dBとする. バイアス微調可
	19-2	規定録音状態 テープスピード　38cm/s	LINE IN －32dB/40～30k Hz	チェック	OUTPUT 図20	
20. 総合位相ずれ	20-1	規定録音状態 テープスピード　19cm/s	LINE IN －32dB/40～10k Hz	チェック	OUTPUT 40～10k Hz　45°以内	
21. LH Iの確認	21-1	規定録音状態 テープスピードYTT-8013 テープスピード　19cm/s	LINE IN －32dB/20k Hz	チェック	OUTPUT TAPE SELECTOR スイッチをLHII→LH Iにした時の出力レベル上昇. 3dB±1dB	
ステレオチャネル 22. セパレーション (FWD REC)	22-1	規定録音状態 テストテープ YTT-8013 テープスピード　19cm/s TAPE SELECTORスイッチLHII モード　REC	LINE IN L －12dB/1kHz R無信号	チェック	OUTPUT Rch (出力レベル) －55dB以下	(1kHz BPF)
	22-2	同　上	LINE IN L無信号 R －12dB/1kHz	チェック	OUTPUT Lch (出力レベル) －55dB以下	(1kHz BPF)

DBX系

注．DBXのレベル調整はDBXユニットの調整を完了してから行うこと．

0dB＝0.775V

調整項目		準備・設定	入力信号	調整個所	測定個所・調整値	備考
26．エンコーダ・レベルセット	26-1	1-3項の状態で DBXスイッチをINにする	LINE IN −12dB/1k Hz	R737/R738	REC AND PLAY AMPL PCB#46(47) −8dB±0.5dB	
27．デコーダ・レベルセット	27-1	14-1項の状態で DBXスイッチをINにする	LINE IN −12dB/1k Hz	R637/R638	OUTPUT IN-OUTのレベル差0.5dB	
28．DBX IN-OUT切換時の録再レベル差	28-1	14-1項の状態で DBXスイッチをIN-OUTする	LINE IN −12dB/400Hz	チェック	OUTPUTのレベル差 2dB以内	
29．DBX録再周波数特性（単一スイープ応答）	29-1	19-1，19-2項の状態で DBXスイッチをINにする	LINE IN −12dB(38cm/s) −22dB(19cm/s)	チェック	OUTPUT 40〜20k Hz ±5dB −4dB	EE： YTT-8053
30．DBX総合S.N比	30-1	16-1項の状態で DBXスイッチをINにする	無信号	チェック	OUTPUT 65dB以上	
31．DBX歪み率チェック	31-1	15-1項の状態で DBXスイッチをINにする	LINE IN −12dB/1k Hz ＋8dB/1k Hz	チェック	OUTPUT 0.8%以下(0VU) 3%以下(＋20VU)	

DBXユニットの調整

注1.DBXユニットは通常，調整の必要はありません．万一，調整する場合は次の要項で行います．

注2.DBXユニットを外す時はX-1000Mの電源を切ってから行う．(J501/P501は外さないこと)

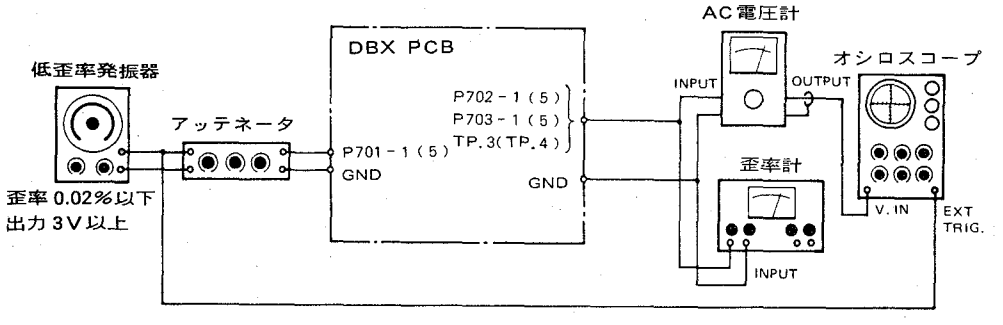

図21　エンコーダ調整時の接続

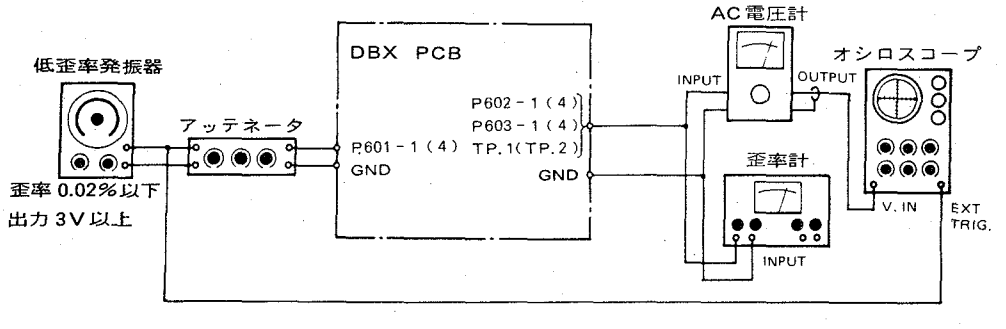

図22　デコーダ調整時の接続

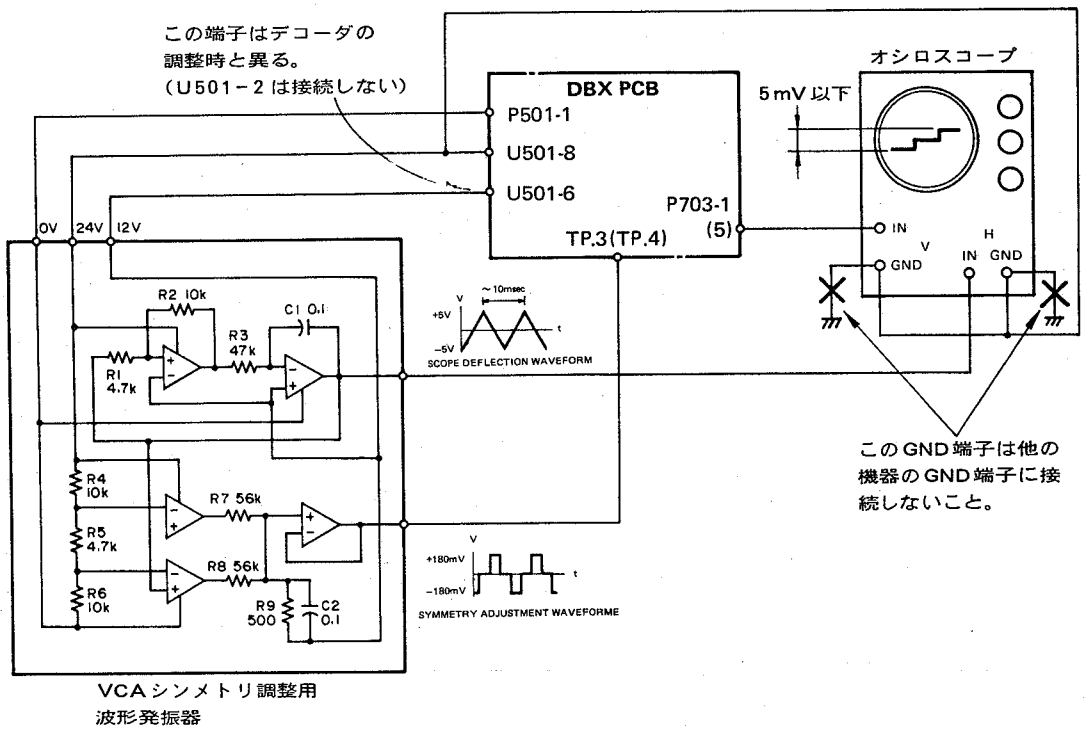

図23　VCA シンメトリ調整の接続(エンコーダ)

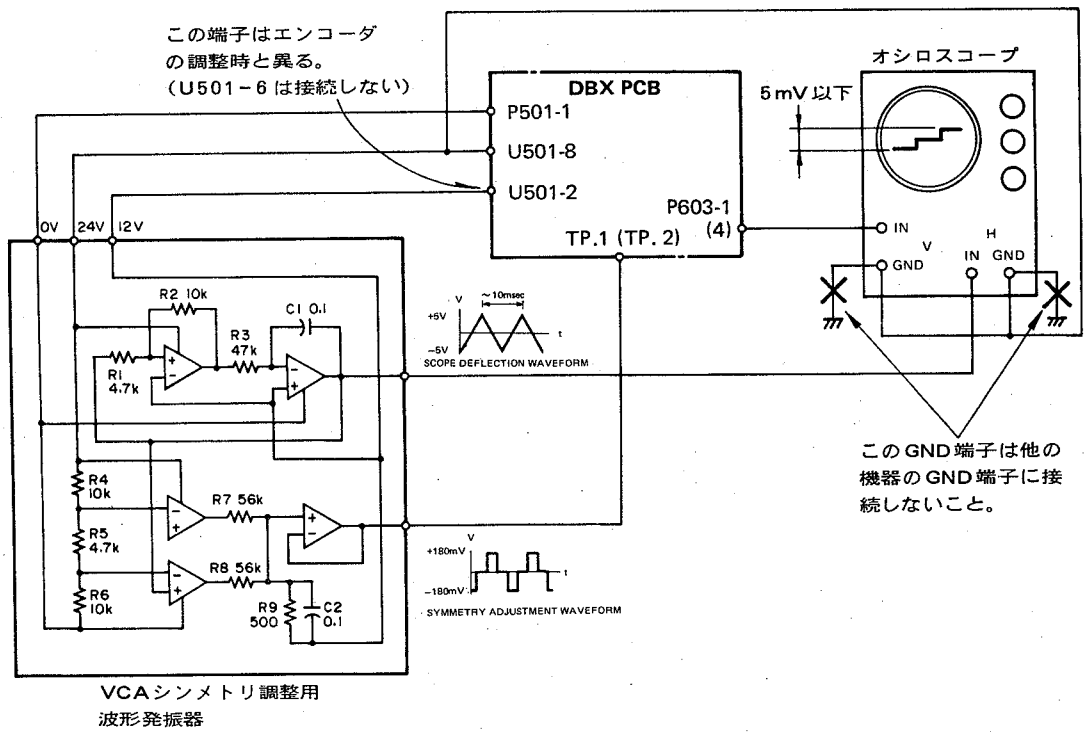

図24　VCA シンメトリ調整の接続(デコーダ)

DBX基板単体調整

エンコーダ調整

1．準備
- P701～P703の線材を外し、図21のように測定器を接続する。(各コネクタのピン1はLch，ピン5はR ch)
- R737(R738)，R763(R764)を中点位置にする。

2．入力の設定
- P701－1(5)に100Hzの入力を加え、P702－1(5)の出力が300mVになるよう入力レベルを調整する。

3．RMS SYM調整
- TP.3(TP.4)の出力波形が200Hzの正げん波になるようR765(R766)を調整する。

4．RMS時定数調整
- TP.3(TP.4)の出力が385μV±20%であることを確認する。

5．エンコーダ基準レベル調整
- P701－1(5)に1kHzの入力を加え、P702－1(5)の出力が300mVになるよう入力レベルを調整する。
- 次にP703－1(5)の出力レベルが300mVになるようR737(R738)を調整する。

6．VCAシンメトリ調整
- 測定器を図23のように接続する。
- オシロスコープの波形が一直線になるようR757(R758)を調整する。(この時のレベルのズレは5mV以下のこと)

7．周波数特性チェック
- 測定器の接続を図21に戻す。
- 入力信号を100Hz，10kHzとしたとき、R703－1(5)の出力がそれぞれ212mV～238mV，165mV～185mVであることを確認する。

8．エンコーダ効果チェック－1
- 5項の状態から入力信号を1kHz/300μVにしたときP703－1(5)の出力が8.95mV～10.1mVであることを確認する。(1kHzバンド・パス・フィルタを使用して測定すること)

9．エンコーダ効果チェック－2
- 5項の状態から入力信号を1kHz/3Vにしたとき、P703－1(5)の出力が895mV～1.01Vであることを確認する。
- このとき歪率は0.3%以下であること。

デコーダ調整

1．準備
- P601～P603の線材を外し、図22のように測定器を接続する。(各コネクタのピン1はLch，ピン4はR ch) 図23
- R637(R638)，R663(R664)を中点位置にする。

2．入力の設定
- P601－1(4)に100Hzの入力を加え、P602－1(4)の出力が300mVになるよう入力レベルを調整する。

3．RMS SYM調整
- TP.1(TP.2)の出力波形が200Hzの正げん波になるようR665(R666)を調整する。

4．RMS時定数調整
- TP.1(TP.2)の出力レベルが385μV±20%であることを確認する。

5．デコーダ基準レベル調整
- P601－1(4)に1kHzの入力を加え、P602－1(4)の出力が300mVになるよう入力レベルを調整する。
- 次にP603－1(4)の出力レベルが300mVになるようR637(R638)を調整する。

6．VCAシンメトリ調整
- 測定器を図24のように接続する。
- オシロスコープの波形が一直線になるようR657(R658)を調整する。(この時のレベルのズレは5mV以下のこと)

7．周波数特性チェック
- 測定器の接続を図22に戻す。
- 入力信号を100Hz，10kHzとしたとき、P603－1(4)の出力がそれぞれ475mV～599mV，789mV～993mVであることを確認する。

8．デコード効果チェック－1
- 5項の状態から入力信号を1kHz/9.48mVにしたときP603－1(4)の出力レベルが267μV～336μVであることを確認する。(1kHzバンド・パス・フィルタを使用して測定すること)

9．デコード効果チェック－2
- 5項の状態から入力信号を1kHz/948mVにしたときP603－1(4)の出力レベルが2.67V～3.37Vであることを確認する。

ASSEMBLING HARDWARE CODING LIST

All screws conform to ISO standards, and have crossrecessed heads, unless otherwise noted. ISO screws have the head inscribed with a point as in the figure to the right.



FOR EXAMPLE:

B M 3 x 6

- B — Nomenclature
- M — Metric System
- 3 — Diameter in mm (D) *
- 6 — Length in mm (L)



* Inner dia. for washers and nuts

	Code	Name	Type
MACHINE SCREW	R	Round Head Screw	
	P	Pan Head Screw	
	T	Stove Head Screw (Truss)	
	B	Binding Head Screw	
	F	Flat Countersunk Head Screw	
	O	Oval Countersunk Head Screw	
WOOD SCREW	RW	Round Head Wood Screw	
TAPTITE SCREW	PTT	Pan Head Taptite Screw	
	WTT	Washer Head Taptite Screw	
SEMS SCREW	BSA	Binding Head SEMS Screw(A Type)	
	BSB	Binding Head SEMS Screw(B Type)	
	BSF	Binding Head SEMS Screw(F Type)	
	PSA	Pan Head SEMS Screw(A Type)	
	PSB	Pan Head SEMS Screw(B Type)	

	Code	Name	Type
TAPPING SCREW	BTA	Binding Head Tapping Screw(A Type)	
	BTB	Binding Head Tapping Screw(B Type)	
	RTA	Round Head Tapping Screw(A Type)	
	RTB	Round Head Tapping Screw(B Type)	
SETSCREW	SF	Hex Socket Setscrew(Flat Point)	
	SC	Hex Socket Setscrew(Cup Point)	
	SS	Slotted Socket Setscrew(Flat Point)	
WASHER	E	E-Ring (Retaining Washer)	
	W	Flat Washer (Plain)	
	SW	Lock Washer (Spring)	
	LWI	Lock Washer (Internal Teeth)	
	LWE	Lock Washer (External Teeth)	
	TW	Trim Washer (Countersunk)	
NUT	N	Hex Nut	

EXPLODED VIEWS AND PARTS LIST

EXPLODED VIEW -1 (X-1000M)

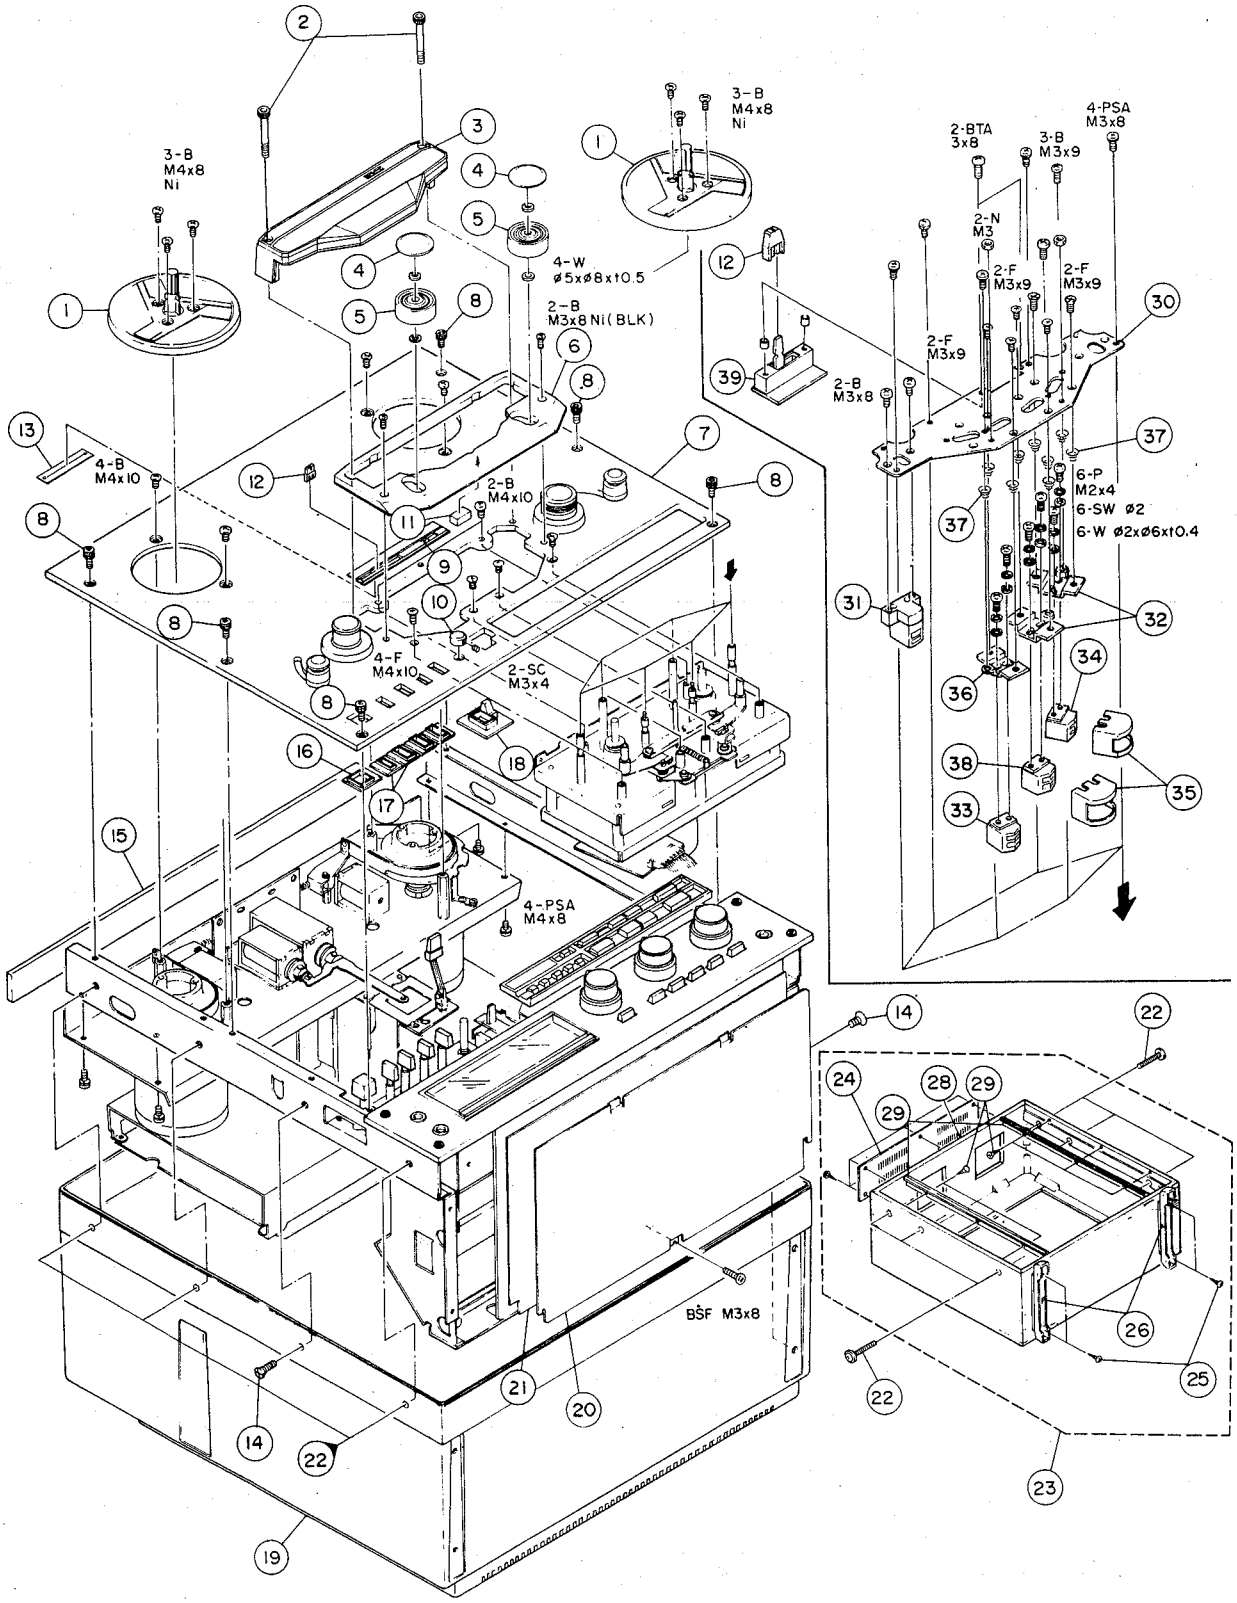

EXPLODED VIEW - 1 (X-1000M)

Parts marked with *require longer delivery time.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
1 - 1	5504744000	Reel Table Assy	X-10R
1 - 2	*5800323400	Screw, Head Housing	
1 - 3	*5800452200	Housing Assy, Head	
1 - 4	*5800320901	Cap, Pinch Roller	X-1000R BL
1 - 5	*5014175100	Pinch Roller	A-2300
1 - 6	*5800261900	Cover, Head Base Plate	X-1000R
1 - 7	*5800385900	Panel, Top	
1 - 8	*5581073000	Screw, Top Panel; C	X-1000R BL
1 - 9	*5800362600	Escutcheon, Timer	32-2B
1 - 10	5800319601	Knob, L	X-1000R BL
1 - 11	*5800002700	Chshion, Head Housing	X-10R
1 - 12	5800262500	Knob, VR	X-1000R
1 - 13	*5800315900	Mask	
1 - 14	*5780204010	Screw, F; M4 x 10	X-1000R
1 - 15	*5555887001	Cushion, Case	X-10R
1 - 16	*5800268900	Escutcheon, Power Switch	X-1000R
1 - 17	*5800268800	Escutcheon, Button	X-1000R
1 - 18	*5534708000	Escutcheon, Cue	X-1000R BL
1 - 19	*5531024102	Case, L	
1 - 20	*5553306000	Plate, Ampl. Shield	X-7
1 - 21	*5553308001	Paper, Ampl. Insulating	X-10R
1 - 22	*5504499000	Screw Assy, Case	X-1000R
1 - 23	*5800321601	Case Assy	
1 - 24	*5800349600	Ventilator	X-1000R BL
1 - 25	*5781603116	Screw, M3.1 x 16	X-1000R
1 - 26	*5504493100	Foot Assy	X-1000R
1 - 27	*5781613110	Screw, M3 x 10	X-1000R BL
1 - 28	*5800321701	Case	X-1000R BL
1 - 29	*5800321800	Sush	X-1000R BL
1 - 30	*5800363200	Plate, Head Base	X-10R
1 - 31	5800352000	E Head Assy 2T	
1 - 32	*5555673000	Bracket, Head; R	X-10R
1 - 33	5378300900	Head, Record; 2-2	
1 - 34	5378300700	Head, Playback; 4-2	X-20R
1 - 35	*5800384500	Head Shield	X-1000R
1 - 36	*5555672000	Bracket, Head; L	X-10R
1 - 37	*5520182000	Spring; D	A-5300
1 - 38	5378301000	Head, Playback; 2-2	
1 - 39	*5200098800	PCB Assy, SWITCH	

EXPLODED VIEW -2 (X-1000)

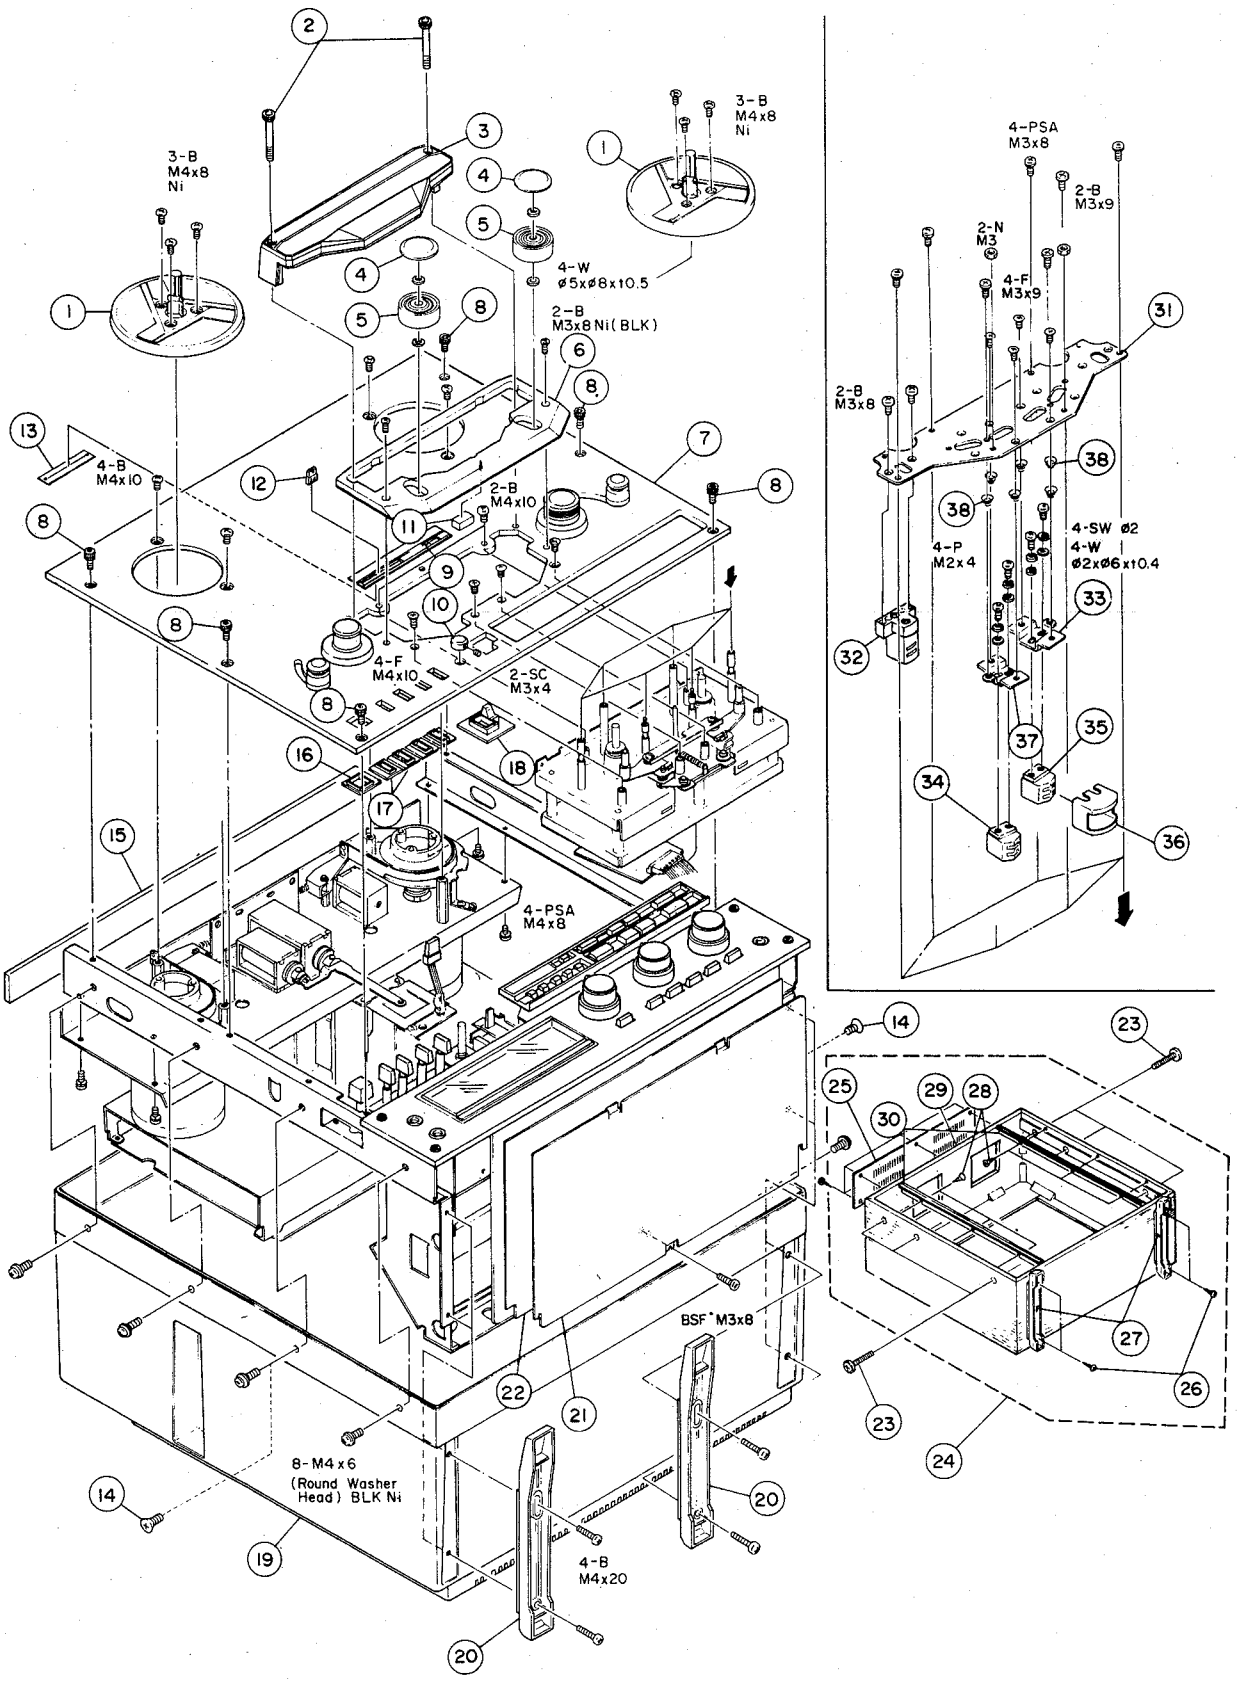

EXPLODED VIEW - 2 (X-1000)

Parts marked with *require longer delivery time.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
2 - 1	5504744000	Reel Table Assy	X-10R
2 - 2	*5800285000	Screw, Head Housing (X-1000)	X-1000R
	*5800323400	Screw, Head Housing (X-1000 BL)	X-1000R BL
2 - 3	*5800452000	Housing Assy, Head (X-1000)	
	*5800452100	Housing Assy, Head (X-1000 BL)	
2 - 4	*5800283900	Cap, Pinch Roller; H (X-1000)	
	*5545014000	Cap, Pinch Roller (X-1000 BL)	X-10R
2 - 5	*5014750100	Pinch Roller	A-2300
2 - 6	*5800269100	Cover, Head Base Plate	X-1000R
2 - 7	*5800363400	Panel, Top (X-1000)	
	*5800385900	Panel, Top (X-1000 BL)	
2 - 8	*5581067000	Screw, Top Panel; B (X-1000)	X-10R
	*5581073000	Screw, Top Panel; C (X-1000 BL)	X-10M
2 - 9	*5800362600	Escutchen, Timer	
2 - 10	5800262700	Knob, L (X-1000)	X-1000R
	5800319601	Knob, L (X-1000 BL)	X-1000R BL
2 - 11	*5800002700	Cushion, Head Housing	X-10R
2 - 12	5800262500	Knob, VR	X-1000R
2 - 13	*5800315900	Mask	X-1000R
2 - 14	*5780204010	Screw, F; M4 x 10 (X-1000 BL)	X-1000R BL
2 - 15	*5555887001	Cushion, Case	X-10R
2 - 16	*5800268900	Escutcheon, Switch	X-1000R
2 - 17	*5800268800	Escutcheon, Button	X-1000R
2 - 18	*5800269100	Escutcheon, Cue (X-1000)	X-1000R
	*5534708000	Escutcheon, Cue (X-1000 BL)	X-1000R BL
2 - 19	*5531024102	Case, L	X-10R
2 - 20	*5533190000	Foot (X-1000)	X-10R
2 - 21	*5553306000	Plate, Ampl. Shield	X-7
2 - 22	*5553308001	Paper, Ampl. Insulating	X-7
2 - 23	*5504499000	Screw Assy, Case (X-1000 BL)	A-480
2 - 24	*5800321601	Case Assy	
2 - 25	*5800349600	Ventilater (X-1000 BL)	X-1000R BL
2 - 26	*5781603116	Screw, M3.1 x 16 (X-1000 BL)	
2 - 27	*5504493100	Foot Assy (X-1000 BL)	A-6600
2 - 28	*5781613100	Screw, M3 x 10 (X-1000 BL)	
2 - 29	*5800321701	Case (X-1000 BL)	X-1000R BL
2 - 30	*5800321801	Sush (X-1000 BL)	X-1000R BL
2 - 31	*5553289100	Plate, Head Base	X-10R
2 - 32	5800322200	Erase, Head Assy; F	X-1000R
2 - 33	*5555673000	Bracket, Head; R	X-10R
2 - 34	5378300600	Head, Record; 4-2	X-20R
2 - 35	5378300700	Head, Playback; 4-2	X-20R
2 - 36	*5554949000	Head Shield, B	A-6600
2 - 37	*5555672000	Bracket, Head; L	X-10R
2 - 38	*5520182000	Spring; D	A-5300

EXPLODED VIEW -3

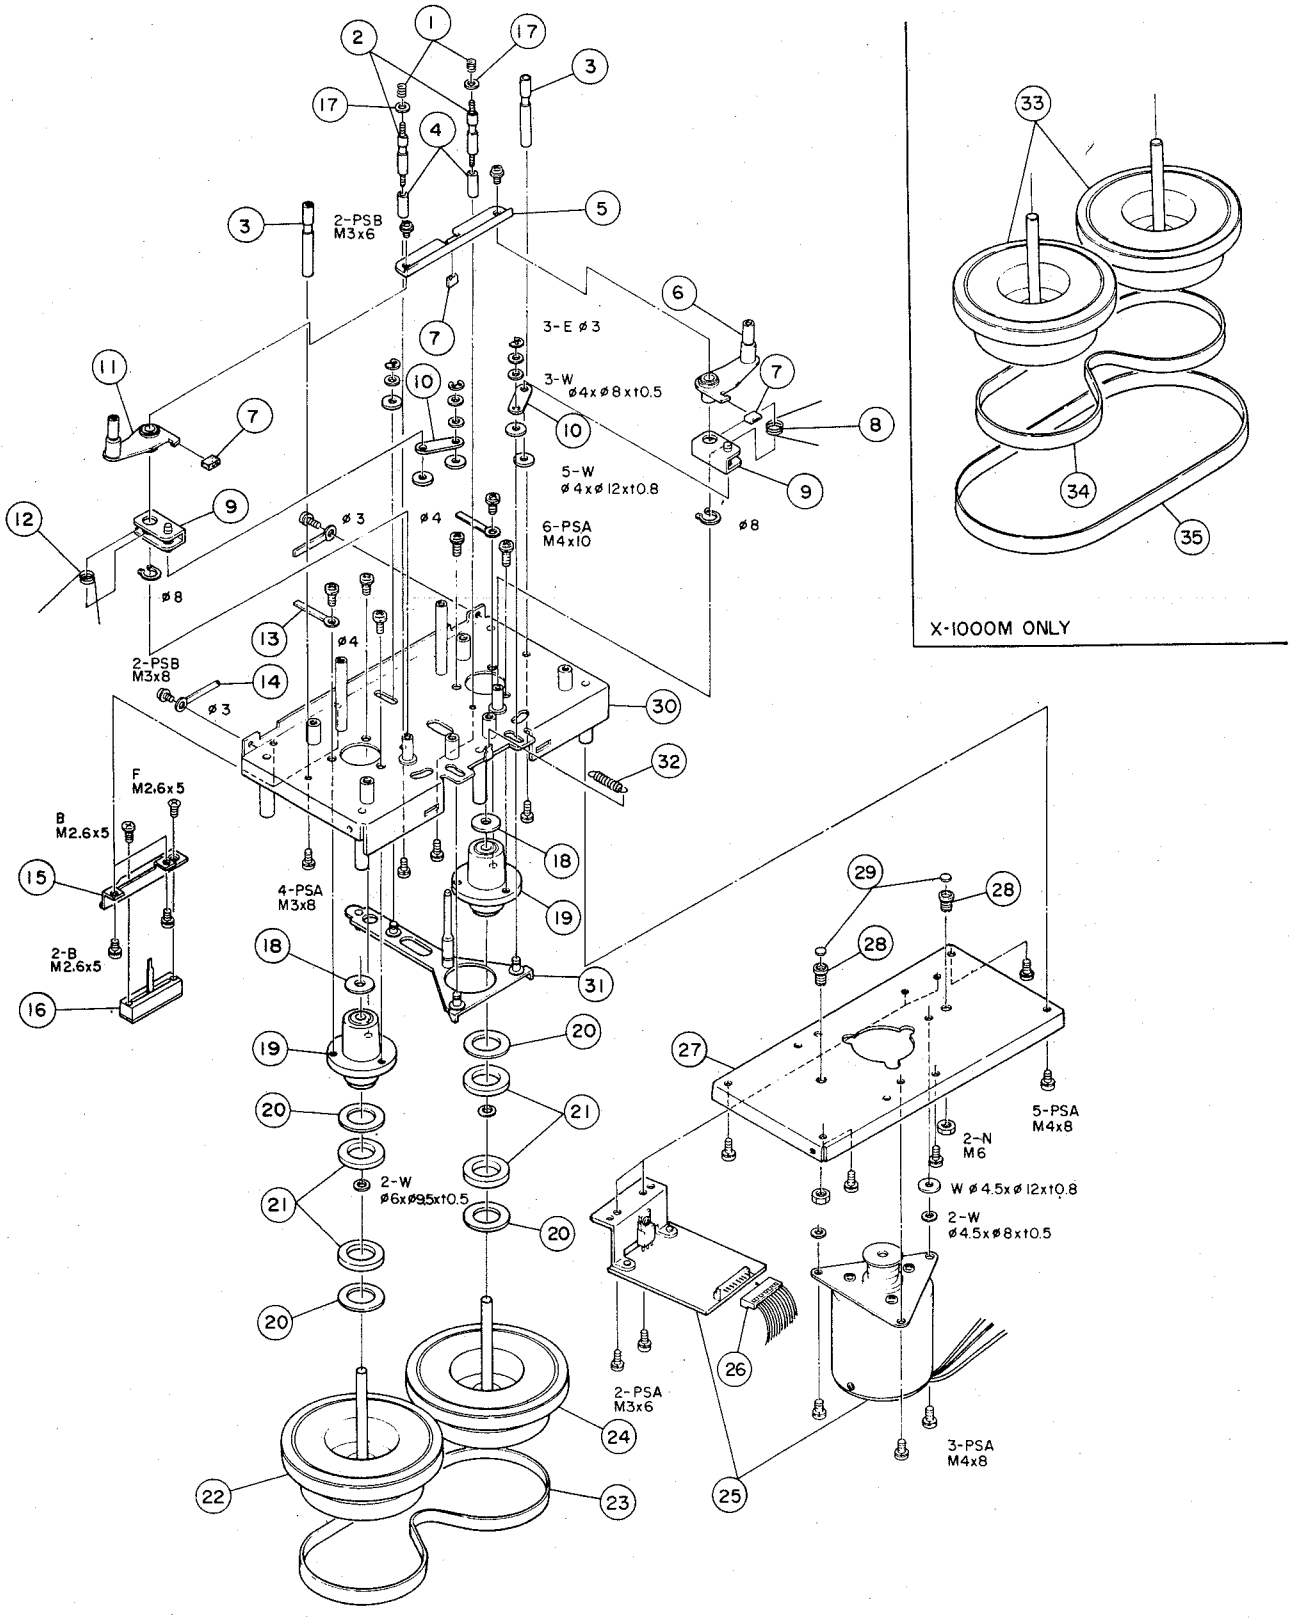

EXPLODED VIEW - 3

Parts marked with *require longer delivery time.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
3 - 1	*5800285600	Spring, Guide	X-1000R
3 - 2	*5800285400	Tape Guide	X-1000R
3 - 3	*5545023000	Pin, Tape Guide	X-1000R
3 - 4	*5800285500	Support, Guide	X-1000R
3 - 5	*5555666000	Plate, Hold	X-10R
3 - 6	*5504729000	Arm Assy, Pinch Roller; R	X-10R
3 - 7	*5534694000	Cushion, Stopper	X-10R
3 - 8	*5524216000	Spring, Pinch Roler; R	X-10R
3 - 9	*5504731000	Bracket Assy, Pinch Roller Arm	X-10R
3 - 10	*5555667000	Plate, Joint	X-10R
3 - 11	*5504730000	Arm Assy, Pinch Roller; L	X-10R
3 - 12	*5524217000	Spring, Pinch Roller; L	X-10R
3 - 13	*5786714000	Clamper, Cord, ϕ4	
3 - 14	*5786713000	Clamper, Cord, ϕ3	
3 - 15	*5800270201	Bracket, VR	X-1000R
3 - 16	5284005500	Slide VR, 100k ohm (B)	
3 - 17	*5800286100	Washer	X-1000R
3 - 18	*5534695000	Washer, Oil Retaining	X-10R
3 - 19	5504726100	Housing Assy, Capstan Flywheel	X-10R
3 - 20	*5555704000	Tape, Adhesive	X-10R
3 - 21	*5534715000	Ring, Magnet; Thrust	X-10R
3 - 22	5504728000	Flywheel Assy, Capstan; L (X-1000/X-1000 BL)	X-10R
3 - 23	5534692001	Belt, Capstan Drive (X-1000/X-1000 BL)	
3 - 24	5504727000	Flywheel Assy, Capstan; R (X-1000/X-1000 BL)	X-10R
3 - 25	7105021001	DC Motor Assy, Capstan; F (X-1000M)	
	*7105018003	DC Motor Assy, Capstan (X-1000/X-1000 BL)	
3 - 26	*5122172000	Connector Socket, 10P (WHT)	
3 - 27	*5800138000	Plate, Bearing; F	X-20R
3 - 28	*5544003000	Screw, Bearing	A-7300
3 - 29	*5555703000	Bearing	X-10R
3 - 30	*5503196000	Chassis Assy, Capstan	X-10R
3 - 31	*5504733001	Plate Assy, Slide	X-10R
3 - 32	*5524219000	Spring, Slide Plate	X-10R
3 - 33	*5504749000	Flywheel Assy, Capstan (X-1000M)	
3 - 34	*5534693000	Belt, Flywheel (X-1000M)	
3 - 35	*5534690000	Belt, Capstan; 2T (X-1000M)	

EXPLODED VIEW -4

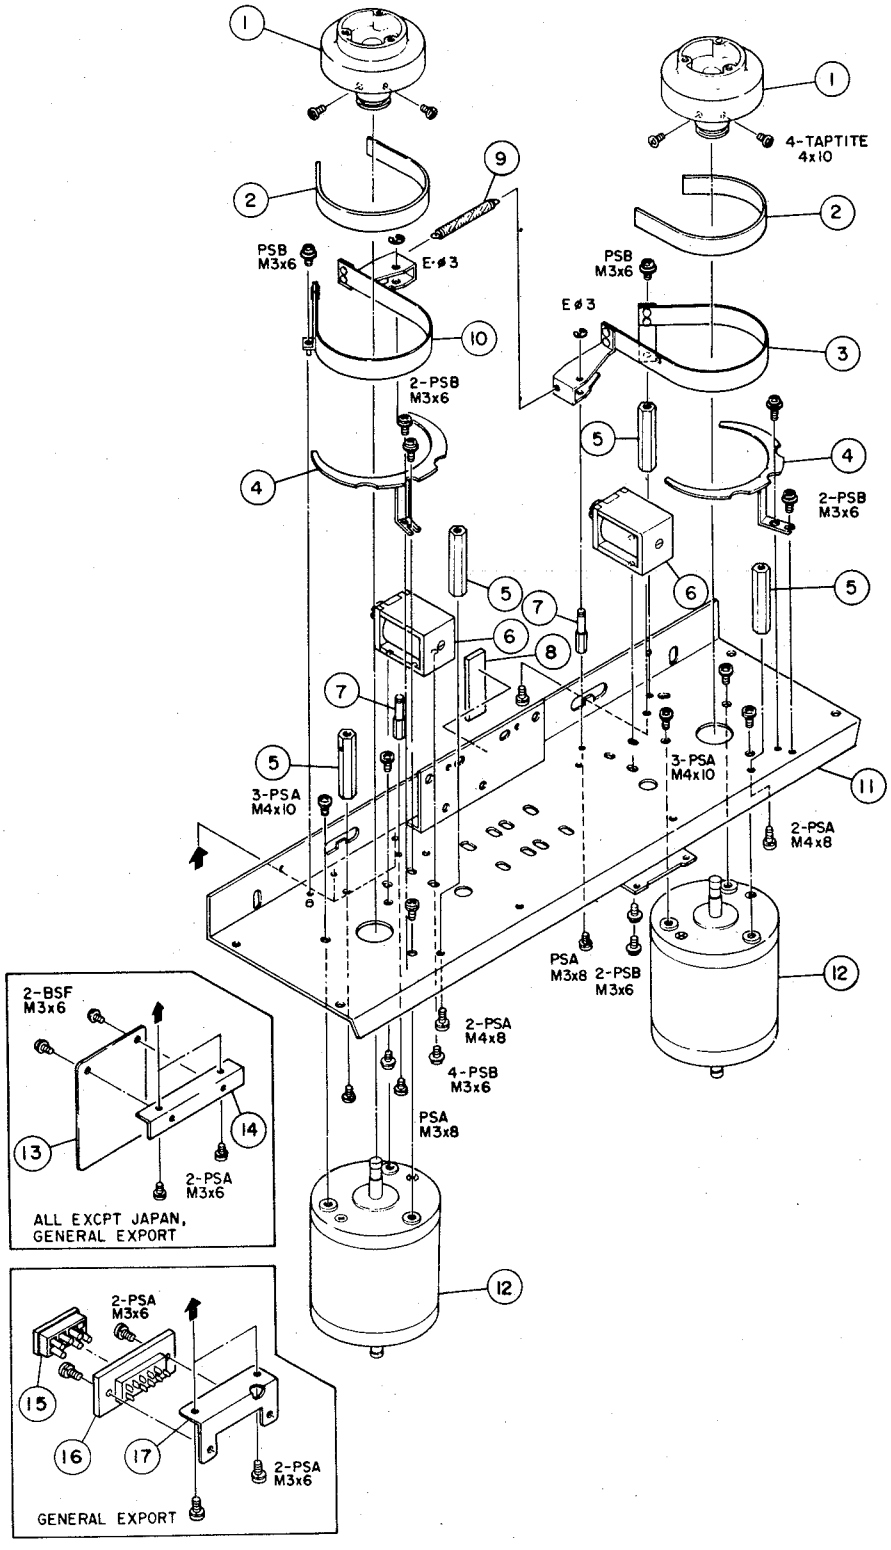

EXPLODED VIEW -4

Parts marked with *require longer delivery time.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
4 - 1	*5800346200	Base Assy, Reel Table; B	X-1000R
4 - 2	*5555274000	Shoe, Brake	A-3300SX
4 - 3	5504736000	Band Assy, Brake; R	X-10R
4 - 4	*5555685000	Plate, Band Assy Retaining	X-10R
4 - 5	*5544916000	Stay, Top Plate; A	A-6100 Mk 2
4 - 6	5163044000	Solenoid, Brake	X-10R
4 - 7	*5545033000	Shaft, Brake	
4 - 8	*5555570000	Chshion	X-10R
4 - 9	*5529249000	Spring, Brake	X-10R
4 - 10	5504735000	Band Assy, Brake; L	X-10R
4 - 11	*5503194002	Chassis Assy, Reel Motor	X-10R
4 - 12	5370003300	DC Motor, Reel	X-1000R
4 - 13	*5168997000	PCB Assy, FUSE (U, C)	
	*5158105000	PCB Assy, FUSE (E, UK, A)	
4 - 14	*5555789000	Bracket, FUSE Assy (All except GE, J)	X-1000R
4 - 15	⚠*5133014000	Plug (GE)	X-1000R
4 - 16	⚠*5133015000	Socket (GE)	X-1000R
4 - 17	*5800351800	Bracket, Switch (GE)	X-1000R

[U] : U.S.A. [C] : CANADA [GE] : GENERAL EXPORT
[A] : AUSTRALIA [E] : EUROPE [UK] : U.K.
[L] : LIMITED AREA [J] : JAPAN

EXPLODED VIEW -5

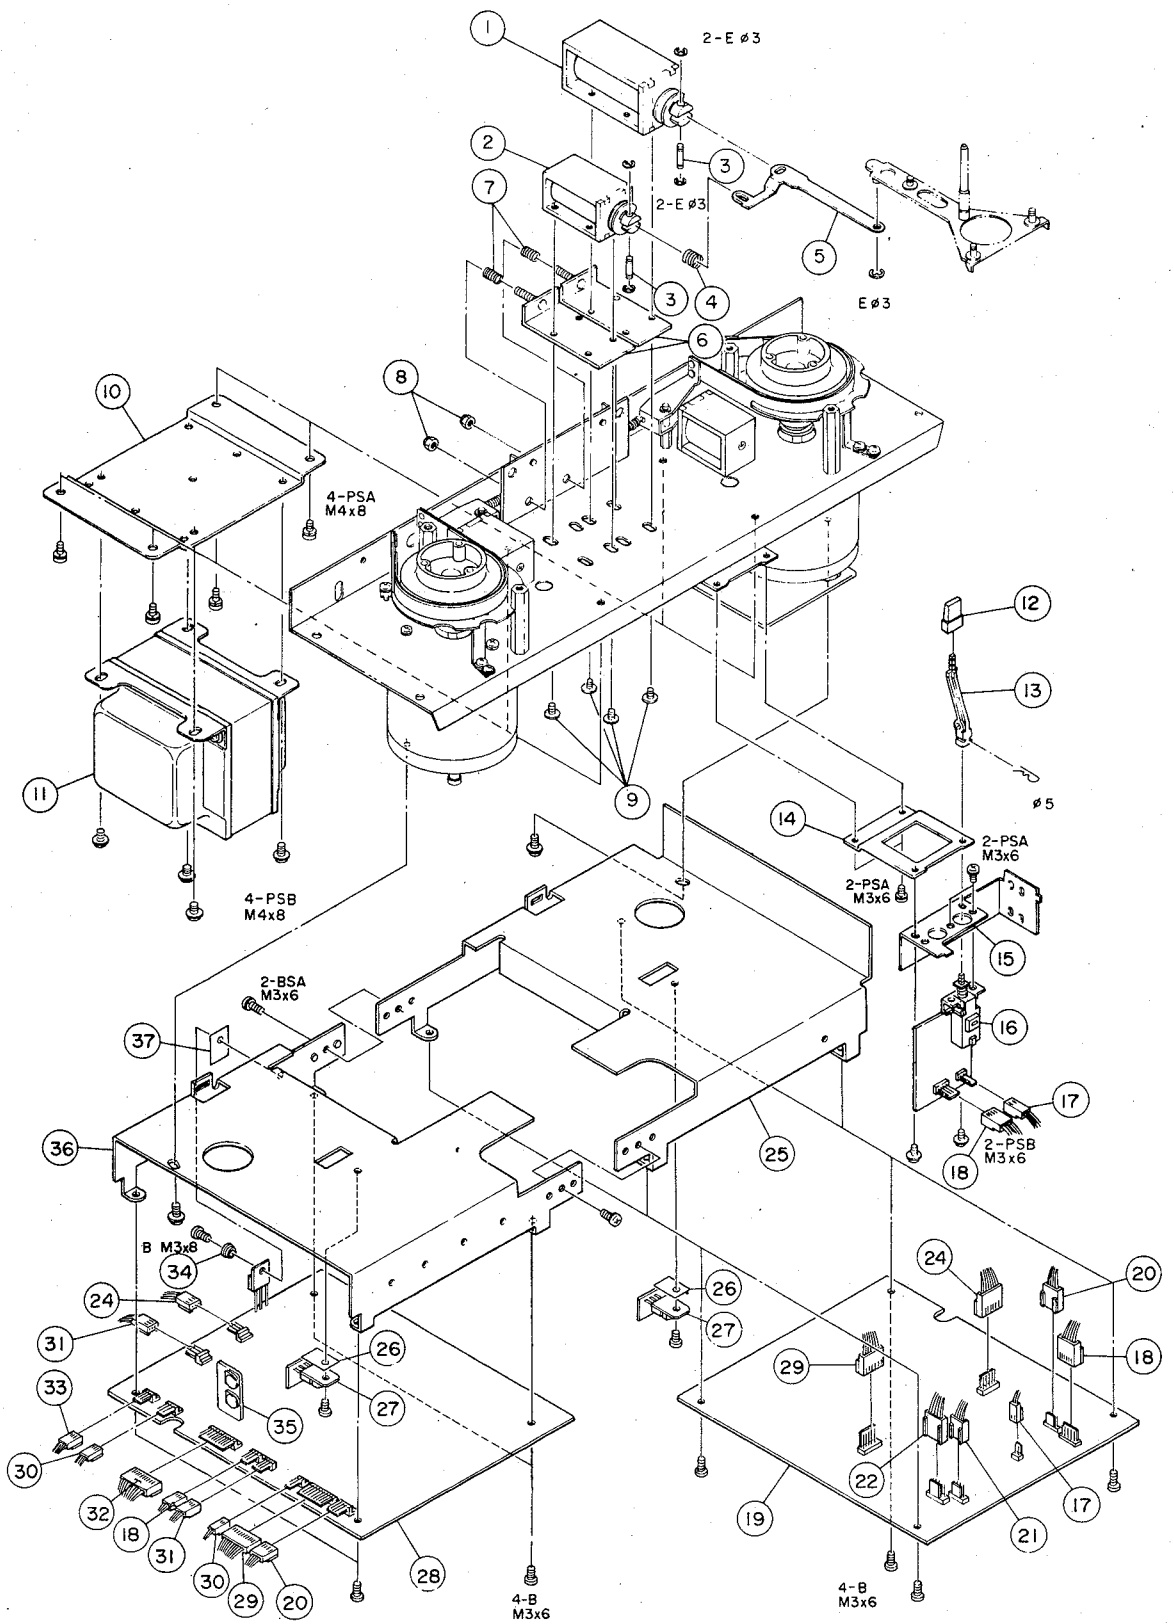

EXPLODED VIEW - 5

Parts marked with *require longer delivery time.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
5 - 1	5163041001	Solenoid, Pinch Roller	
5 - 2	5163042000	Solenoid, Pause	
5 - 3	*5545022000	Pin, Solenoid	X-10R
5 - 4	*5524071000	Spring, Solenoid	AL-700
5 - 5	*5555668000	Plate; C	X-10R
5 - 6	*5504732000	Plate Assy, Solenoid	X-10R
5 - 7	*5524218000	Spring, Pinch Roller Pressure	X-10R
5 - 8	*5581066000	Nut, Nylon; M4	
5 - 9	*5800022600	Screw, Shoulder; G	X-10R
5 - 10	*5555681101	Bracket, Power Transformer	
5 - 11	⚠*5320014100	Transformer. Power (J)	X-1000R
	⚠*5320014200	Transformer, Power (U)	X-1000R
	⚠*5320014301	Transformer. Power (GE)	X-1000R
	⚠*5320014400	Transformer, Power (E, UK, A)	X-1000R
	*5320017300	Transformer, Power (C)	X-1000R
5 - 12	*5800262601	Button; Timer	X-1000R
5 - 13	*5534685000	Rod, Switch	X-1000R
5 - 14	*5555664000	Plate, Joint	X-10R
5 - 15	*5555671100	Bracket, Timer Switch	X-10R
5 - 16	*5200099000	PCB Assy, TIMER	
5 - 17	*5122164000	Connector Socket, 2P (WHT)	
5 - 18	*5122166000	Connector Socket, 4P (WHT)	
5 - 19	*5200067620	PCB Assy, DBX Type I (X-1000M)	
	*5200067630	PCB Assy, DBX Type II (X-1000)	
5 - 20	*5122282000	Connector Socket, 4P(RED)	
5 - 21	*5122167000	Connector Socket, 5P (WHT)	
5 - 22	*5122283000	Connector Socket, 5P (RED)	
5 - 23	*5122224000	Connector Socket, 5P (BLK)	
5 - 24	*5122223000	Connector Socket, 4P (BLK)	
5 - 25	*5800269701	Bracket, PCB; Ampl.	
5 - 26	*5800328700	Plate, Insulating	
5 - 27	*5200073100	PCB Assy, TRANSISTOR	X-1000R
5 - 28	*5200098510	PCB Assy, POWER/SERVO (X-1000M)	
	*5200098500	PCB Assy, POWER/SERVO (X-1000)	
5 - 29	*5122170000	Connector Socket, 8P (WHT)	
5 - 30	*5122165000	Connector Socket, 3P (WHT)	
5 - 31	*5122281000	Connector Socket, 3P (RED)	
5 - 32	*5122226000	Connector Socket, 7P (BLK)	
5 - 33	*5122222000	Connector Socket, 3P (BLK)	
5 - 34	*5033295000	Tube, Insulating	
5 - 35	*6200083800	PCB Assy, VR	
5 - 36	*5900269601	Bracket, PCB; SERVO	X-1000R
5 - 37	*5033291000	Plate, Insulating	

[U] : U.S.A. [C] : CANADA [GE] : GENERAL EXPORT
[A] : AUSTRALIA [E] : EUROPE [UK] : U.K.
[L] : LIMITED AREA [J] : JAPAN

EXPLODED VIEW -6

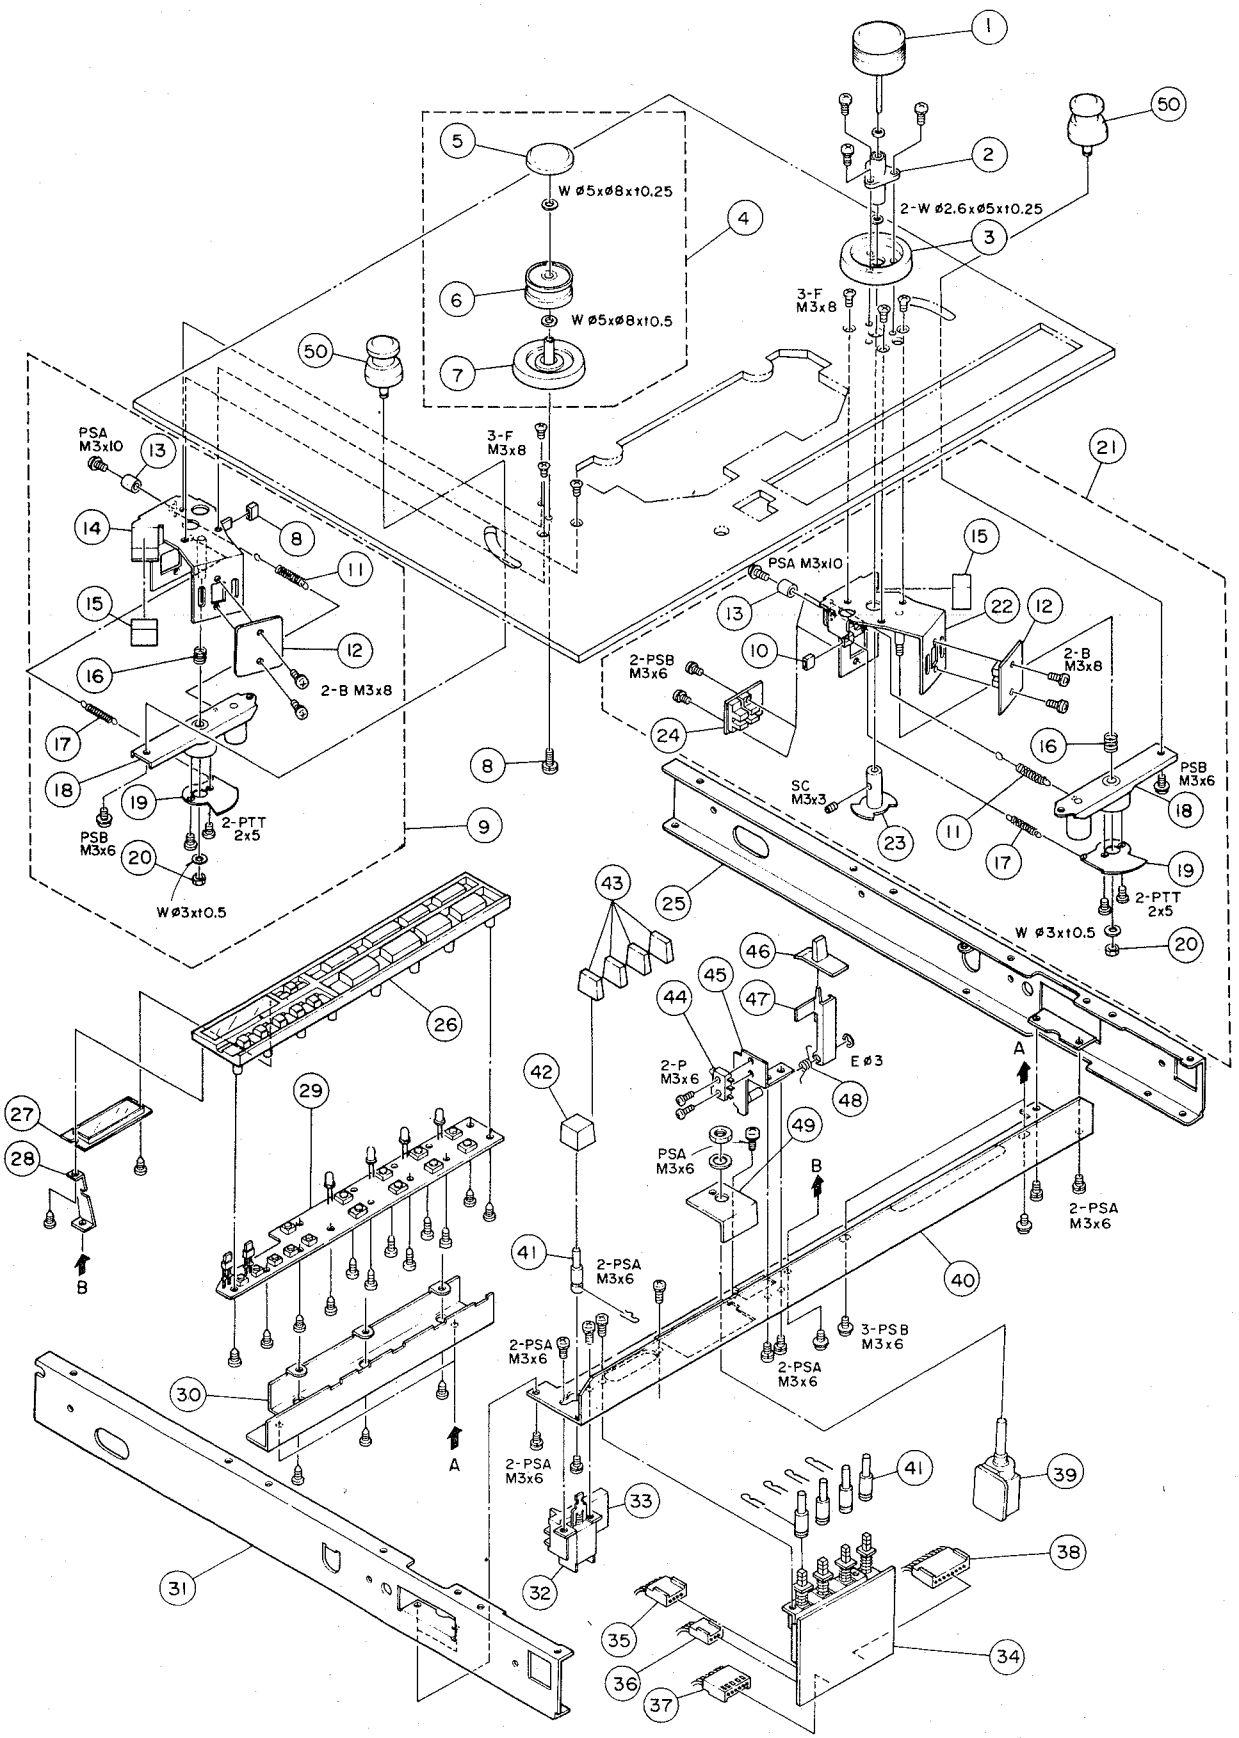

EXPLODED VIEW - 6

Part marked with *require longer delivery time.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
6 - 1	5800270500	Roller Assy	X-1000R
6 - 2	*5504516000	Metal Holder Assy	
6 - 3	*5800270400	Base, Roller	X-1000R
6 - 4	*5504741004	Roller Assy; B	
6 - 5	*5545037000	Cap, Roller	X-10R
6 - 6	5504743004	Roller Assy; B	X-10
6 - 7	*5504742001	Base Assy, Roller; B	
6 - 8	*5783083012	Screw, M3 x 12	
6 - 9	*5600059900	T.A. Block Assy; R	
6 - 10	*5027699000	Coller, Rubber	
6 - 11	*5800270900	Spring, Tension	X-1000R
6 - 12	*5200067402	PCB Assy, TENSION SENSOR	X-1000R
6 - 13	*5800348501	Coller	X-1000R
6 - 14	*5800269801	Base Assy, Shut Off; L	X-1000R
6 - 15	*5534686001	Cushion	X-10R
6 - 16	*5524069000	Spring, Roller Arm	AL-700
6 - 17	*5800270801	Spring, Return	X-1000R
6 - 18	5800271602	Arm Assy, Tension	X-1000R
6 - 19	*5800270700	Shutter	X-1000R
6 - 20	*5581045000	Nut, Nylon	
6 - 21	*5600059800	T.A. Block Assy; L	
6 - 22	*5800269901	Base Assy, Shut Off; B	X-1000R
6 - 23	*5800447200	Refrector Assy (X-1000M)	
6 - 24	*5200067201	PCB Assy, ROLLER SENSOR (X-1000/X-1000 BL)	X-1000R
6 - 25	*5552393102	Angle, Slide; R	X-10R
6 - 26	*5800363300	Button Assy, Control	
6 - 27	*5225009600	Indicator, LED: SC-2585	
6 - 28	*5800283500	Plate, Reinforcement	X-1000R
6 - 29	*5200098700	PCB Assy, KEYBOARD	
6 - 30	*5800363100	Bracket, Button; Control	
6 - 31	*5552394101	Angle, Slide; L	X-10R
6 - 32	⚠ 5300017900	Switch, Power (J)	
	⚠ 5134037000	Switch, Power (U)	
	⚠ 5134018000	Switch, Power (C)	
	⚠ 5134036000	Switch, Power (GE)	
	⚠ 5134011000	Switch, Power (E, UK, A)	
6 - 33	⚠*5052907000	Spark Killer, 0.01μF+300/300V (J, GE)	
	⚠*5052910000	Spark Killer, 0.033μF+120/125V (U)	
	⚠*5052911000	Spark Killer, 0.033μF+120/250V (C)	
	⚠*5267702500	Spark Killer, 0.0047μF 250V (E, UK, A)	
6 - 34	*5200098610	PCB Assy, FUNCTION SWITCH	
6 - 35	*5122282000	Connector Socket, 4P (RED)	
6 - 36	*5122240000	Connector Socket, 3P (RED)	
6 - 37	*5122283000	Connector Socket, 5P (RED)	
6 - 38	*5122170000	Connector Socket, 8P (WHT)	
6 - 39	*5200072300	PCB Assy, PITCH CONT.	X-1000R
6 - 40	*5800047801	Chassis, Control; A	32-2B
6 - 41	*5534713000	Rod, C	X-10R
6 - 42	5800268600	Button, Power Switch	X-1000R
6 - 43	5800263100	Button, Switch	X-1000R
6 - 44	*5301455500	Switch, Micro: SS5GL13-F	
6 - 45	*5504737000	Bracket Assy, Cue	X-10R
6 - 46	*5800263000	Knob, Cue	X-1000R
6 - 47	*5800401000	Lever, Cue; B	X-1000R
6 - 48	*5524223001	Spring, Cue	X-10R
6 - 49	*5800048000	Bracket, Speed Switch	32-2B
6 - 50	*5800349001	Tension Roller Assy; A	X-1000R

[U] : U.S.A. [C] : CANADA [GE] : GENERAL EXPORT
[A] : AUSTRALIA [E] : EUROPE [UK] : U.K.
[L] : LIMITED AREA [J] : JAPAN

EXPLODED VIEW -7

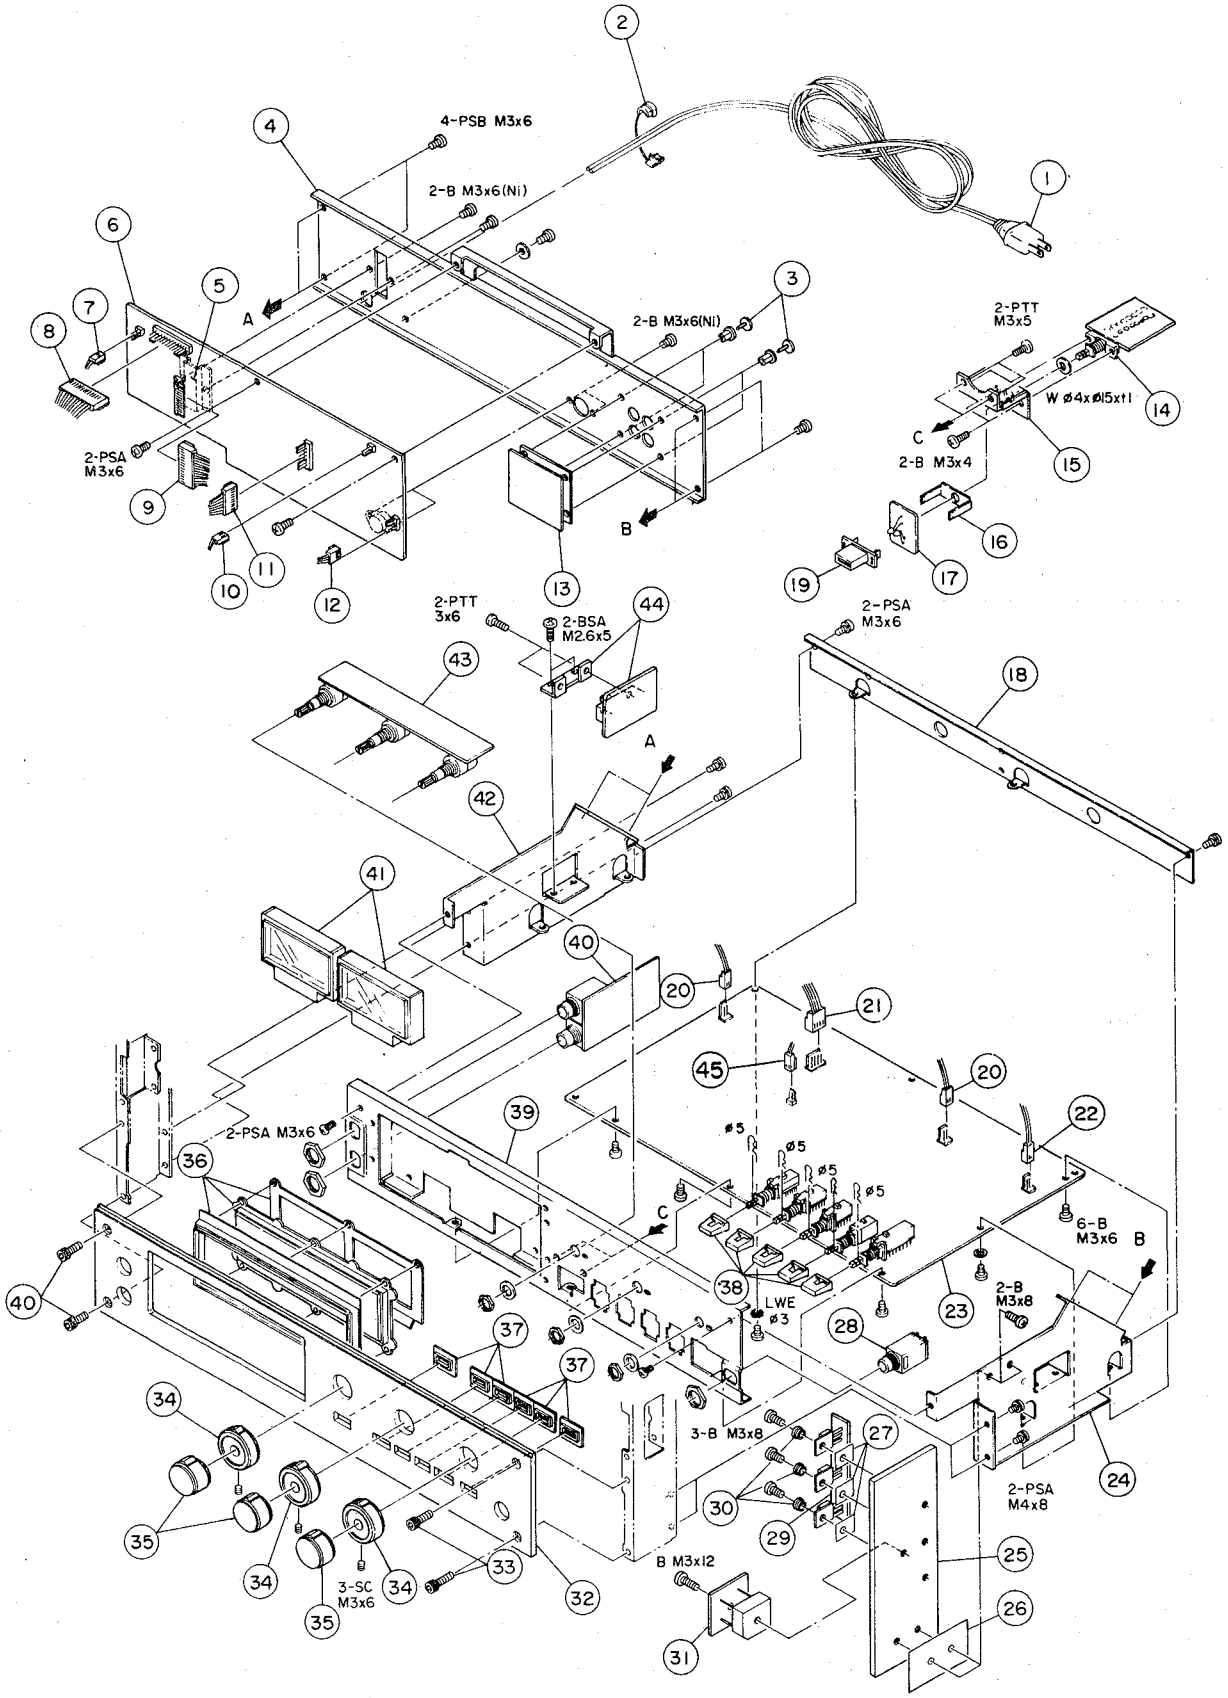

EXPLODED VIEW - 7

Part marked with *require longer dilivery time.

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
7 - 1	⚠*5128027000	Cord, AC Power (J)	
	⚠*5128075000	Cord, AC Power (U, C, GE)	
	⚠*5350008200	Cord, AC Power (E)	
	⚠*5128047000	Cord, AC Power (UK)	
	*5350008300	Cord, AC Power (A)	
7 - 2	*5534660000	Strain Relief, AC Power Cord (All except UK)	
	*5534661000	Strain Relief, AC Power Cord (UK)	
7 - 3	*5534118000	Push Rivet	
7 - 4	*5800270301	Panel, Ampl.; Rear:H	X-1000R
7 - 5	*5800283400	Bracket, Connector	X-1000R
7 - 6	*5200098400	PCB Assy, CONTROL	
7 - 7	*5122164000	Connector Socket, 2P (WHT)	
7 - 8	*5122176000	Connector Socket, 14P (WHT)	
7 - 9	*5122177000	Connector Socket, 15P (WHT)	
7 - 10	*5122280000	Connector Socket, 2P (RED)	
7 - 11	*5122170000	Connector Socket, 8P (WHT)	
7 - 12	*5122165000	Connector Socket, 3P (WHT)	
7 - 13	*5200036000	PCB Assy, IN/OUTPUT	X-1000R
7 - 14	*5200072410	PCB Assy, DBX SWITCH	
7 - 15	*5800140402	Bracket, Push Switch	
7 - 16	*5800385700	Button, Holder; G	
7 - 17	*5200072500	PCB Assy, LED	
7 - 18	*5553297100	Bracket, REC AND PLAY AMPL. PCB	X-10R
7 - 19	5800385400	Button, DBX; J	
7 - 20	*5122164000	Connector Socket, 2P (WHT)	
7 - 21	*5122166000	Connector Socket, 4P (WHT)	
7 - 22	*5122280000	Connector Socket, 2P (RED)	
7 - 23	*5200080611	PCB Assy, REC/PLAY AMPL. (X-1000M)	
	*5200080601	PCB Assy, REC/PLAY AMPL. (X-1000)	
7 - 24	*5553295102	Frame, Ampl.; A, F	X-10R
7 - 25	*5800296601	Heat Sink	X-1000R
7 - 26	*5800328700	Plate, Insulating	X-1000R
7 - 27	*5033291000	Plate, Insulating	
7 - 28	*5124026000	Jack,, PHONES	
7 - 29	5200079100	PCB Assy, TRANSISTOR; B	X-1000R
7 - 30	*5033295000	Tube, Insulating	
7 - 31	5200079000	PCB Assy, DIODE	
7 - 32	*5800386000	Plate, Ampl. (X-1000 BL)	
	*5800363600	Plate, Ampl, (X-1000)	
7 - 33	*5581073000	Screw, Ampl. Panel; C (X-1000M/X-1000 BL)	
	*5581067000	Screw, Ampl. Panel; B (X-1000)	
7 - 34	5800319801	Knob, VR; N (X-1000M/X-1000 BL)	
	5800262900	Knob, VR; N (X-1000)	
7 - 35	5800319701	Knob, VR; M (X-1000M/X-1000 BL)	
	5800262800	Knob, VR; M (X-1000)	
7 - 36	*5800319201	Escutcheon Assy (X-1000M/X-1000 BL)	
	*5800262000	Escutcheon Assy (X-1000)	
7 - 37	*5800269000	Escutcheon, Button; H (X-1000 M)	
7 - 38	5800268700	Button	X-1000R
7 - 39	*5800246702	Chassis Assy, Ampl.	
7 - 40	*5200045510	PCB Assy, MIC AMPL.	
7 - 41	5296005100	Meter, VU (X-1000M/X-1000 BL)	X-1000R BL
	5296004900	Meter, VU (X-1000)	X-1000R
7 - 42	*5553294102	Frame, Ampl.; A, L	X-10R
7 - 43	*5200035900	PCB Assy, VOLUME	X-10R
7 - 44	*5200099700	PCB Assy, EQ SWITCH (X-1000M)	
7 - 45	*5122280000	Connector Socket, 2P(RED)	

[U] : U.S.A. [C] : CANADA [GE] : GENERAL EXPORT
[A] : AUSTRALIA [E] : EUROPE [UK] : U.K.
[L] : LIMITED AREA [J] : JAPAN

SEMICONDUCTOR ELECTRODES

LM6402A
LM6405A

(TOP VIEW)



LC7800

(TOP VIEW)



TD62302A
TD62504P

(TOP VIEW)



HD14011BP
HD14066BP
HD14584B

(TOP VIEW)



TA75558P
TA7557P

(TOP VIEW)

LM2904N

(TOP VIEW)

NJM2403D
NJM4558D

(TOP VIEW)



μPC1252H-2
μPC1253H-2

(SIDE VIEW)



2SK-68AL



2SA733(P)
2SA933LN(S)
2SA950(Y)
2SA1015(GR)



2SB507(E)



2SC536(F)



2SC1061(C)



2SC945L(K)
2SC1318(S)
2SC1327(T)
2SC1740LN(S)
2SC1815G(R)
2SD655E



2SD313(E)



2SD718(O)



M4P-51

(BOTTOM VIEW)



1S2473HJ
1S2473VE



1N60



EQA01-06S



ERB12-02G1



WZ-090



PC BOARDS AND PARTS LIST

PC Boards shown viewed from foil side

REC/PLAY AMPL. PCB ASSY

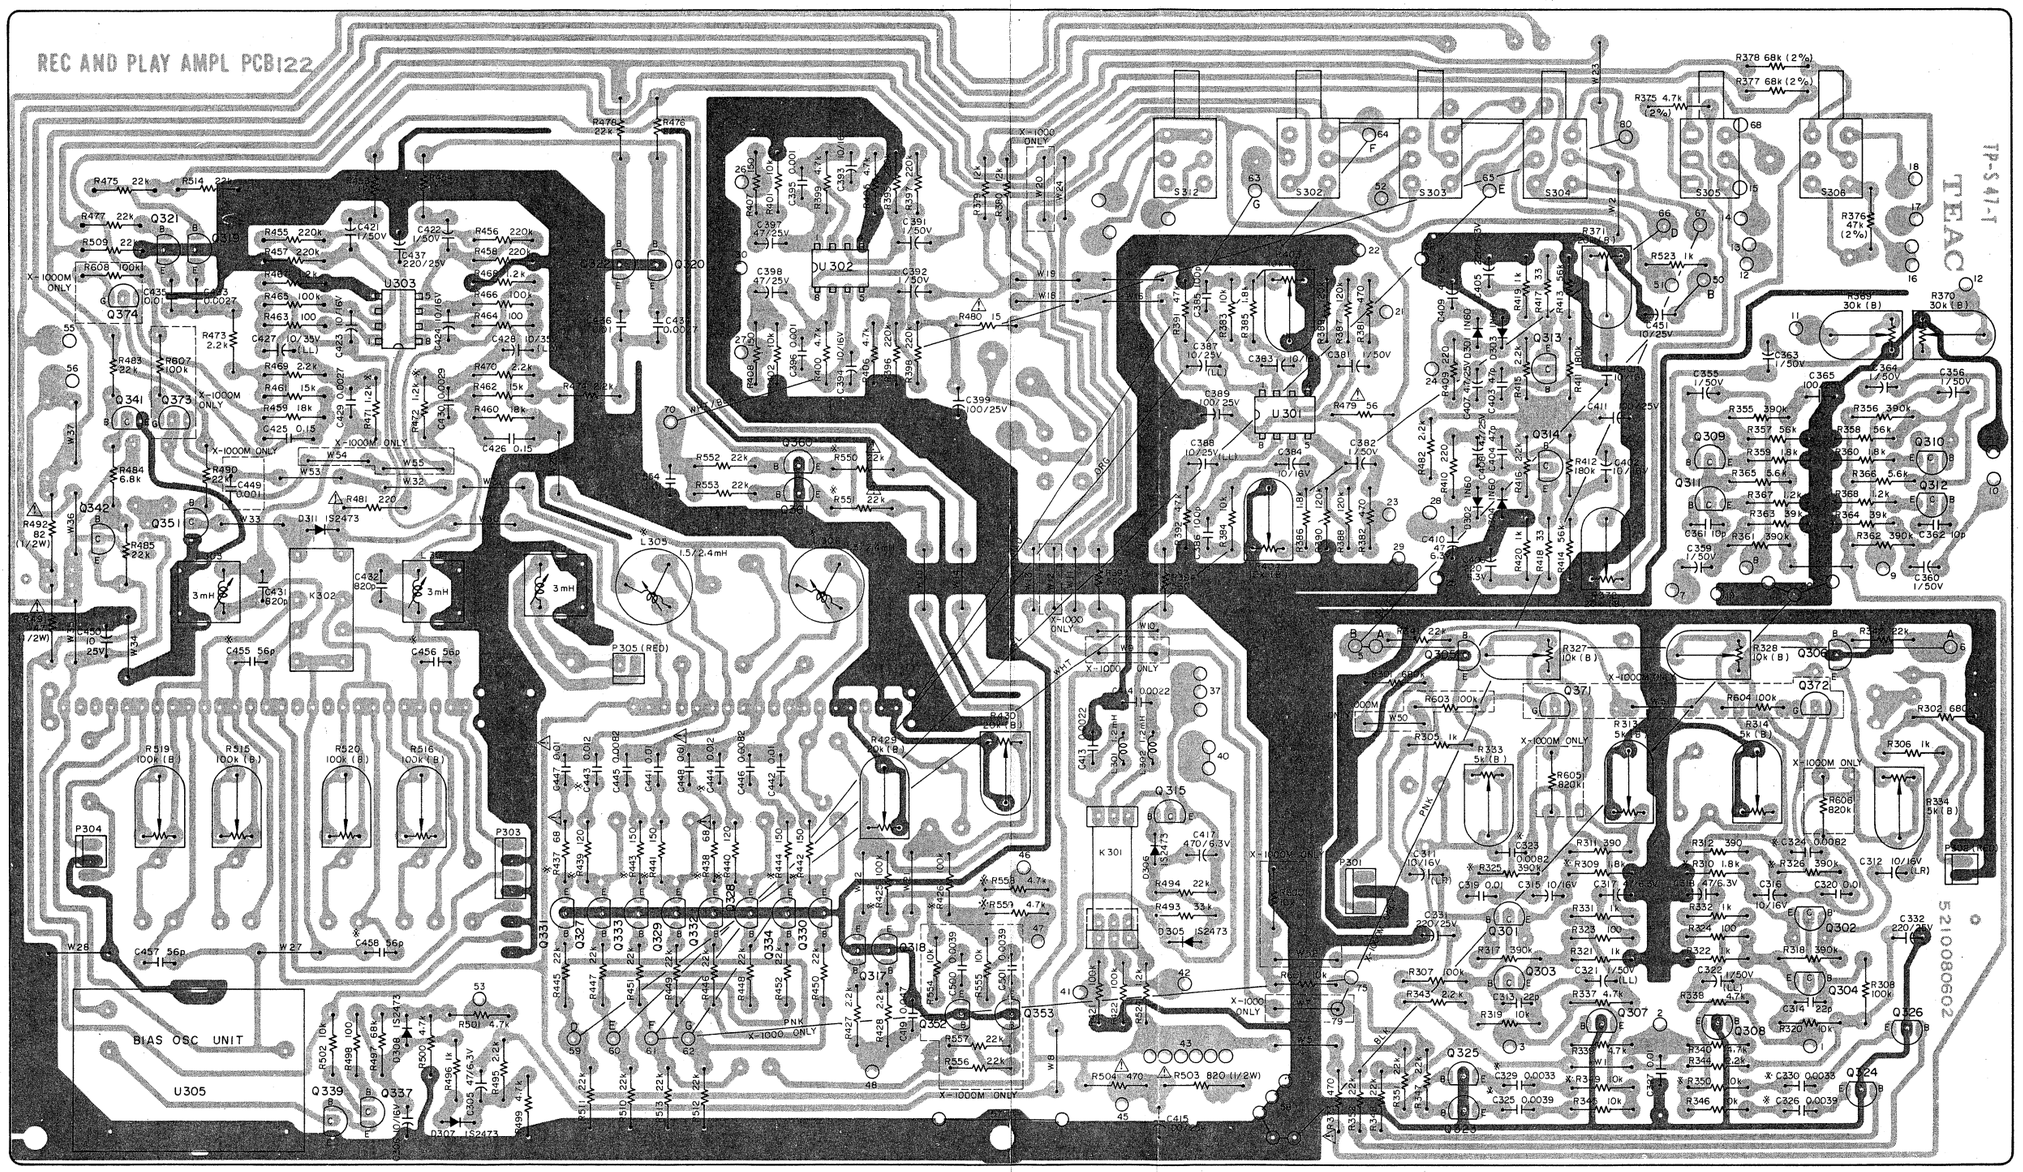

※ X-1000

C323	0.039	C324	0.039	C325	0.0033	C326	0.0033
C329	0.0082	C330	0.0082	C443	0.015	C444	0.015
C455	39p	C456	39p	C458	33p		
R309	1k	R310	1k	R325	270k	R326	270k
R349	5.6k	R350	5.6k	R425	120k	R426	120k
R437	150	R438	150	R439	150	R440	150
R441	120	R442	120	R443	120	R444	120
R471	1.8k	R472	1.8k	R550	33k	R551	33k
R558	JUMPER	W29		R559	JUMPER	W26	
R559	JUMPER	W7		L305	2.4/4.2mH	L306	2.4/4.2mH

CONTROL PCB ASSY

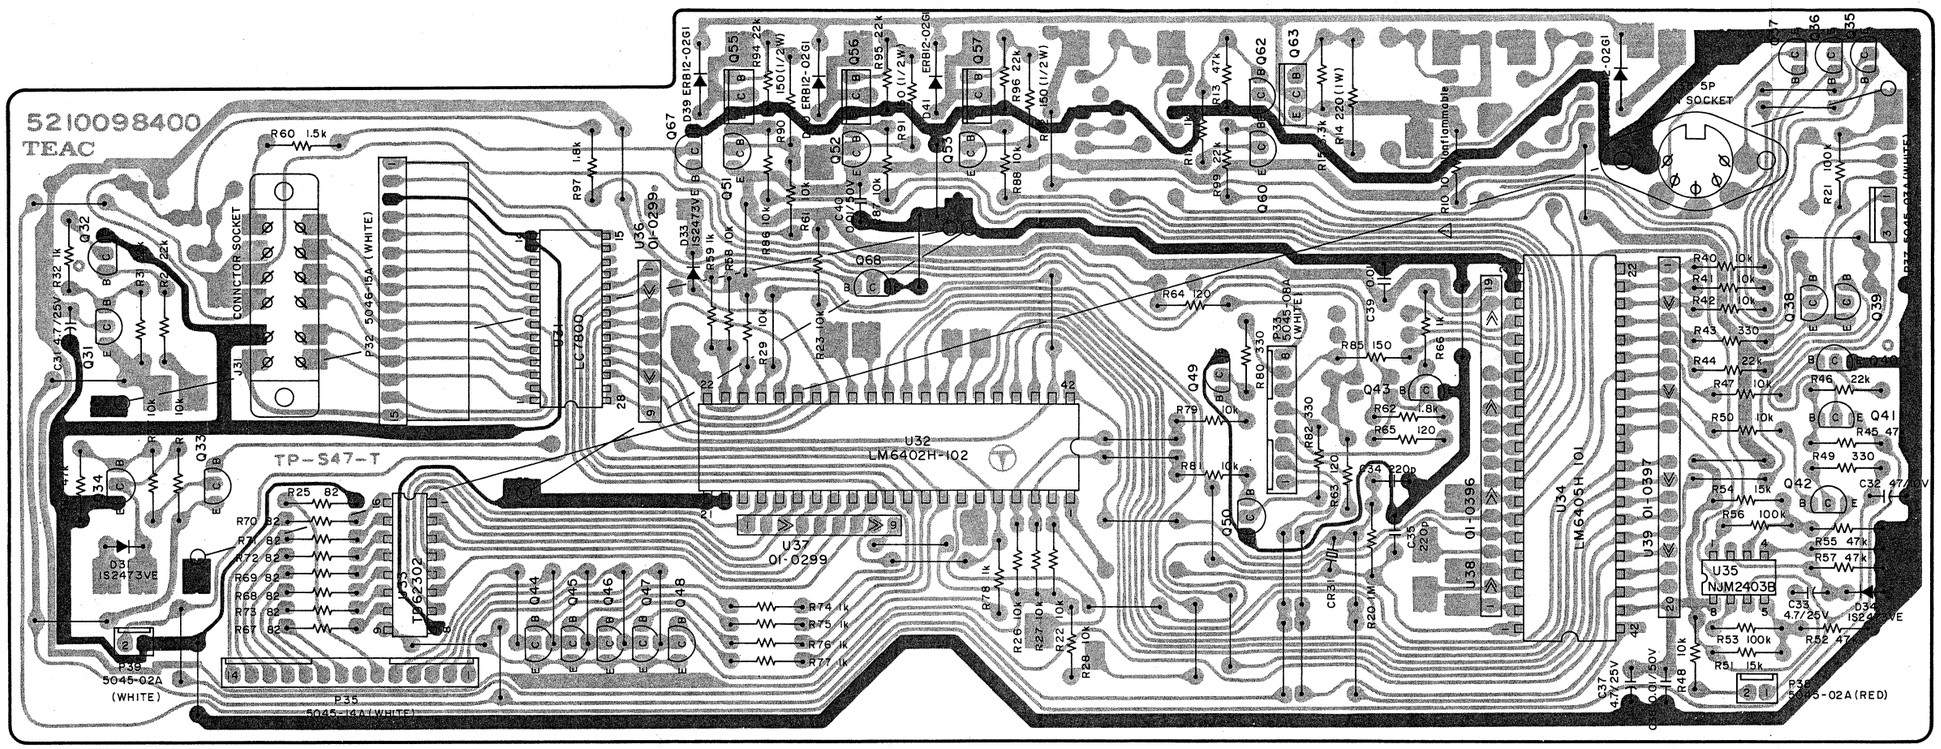

MIC AMPL. PCB ASSY

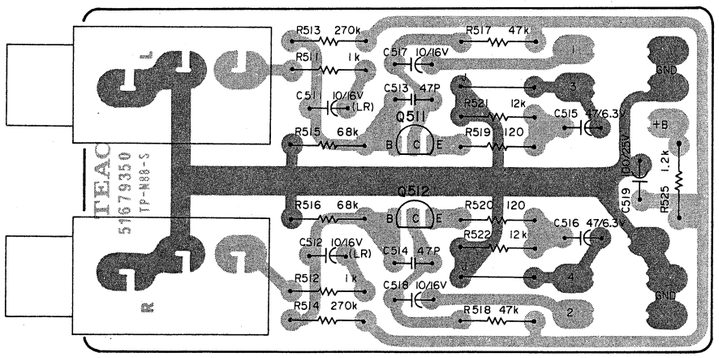

VOLUME PCB ASSY

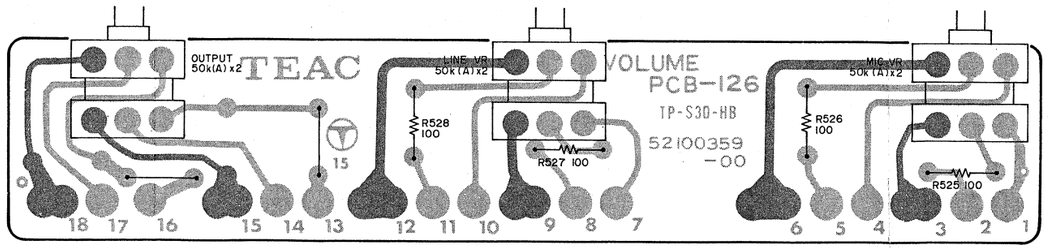

POWER/SERVO PCB ASSY

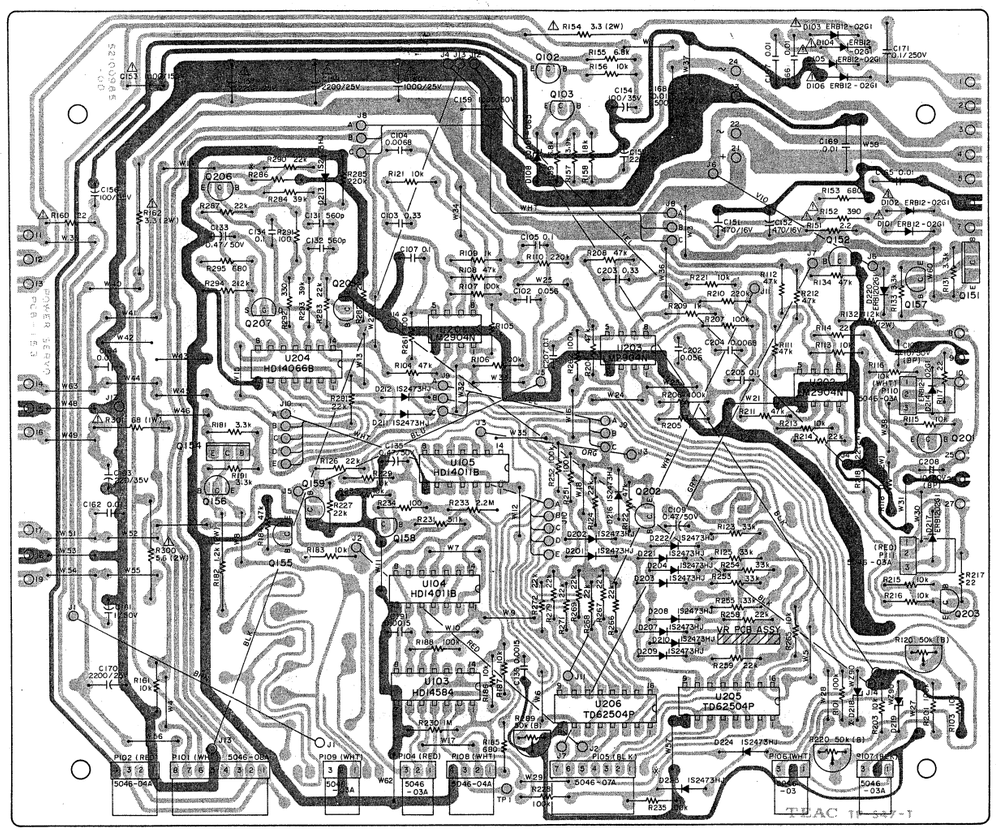

※	R286	D223	D218	
X-1000	150k	1S2473HJ	WZ-090	52000985-00
X-1000M	180k			52000985-10

VR PCB ASSY (POWER/SERVO)



DBX PCB ASSY

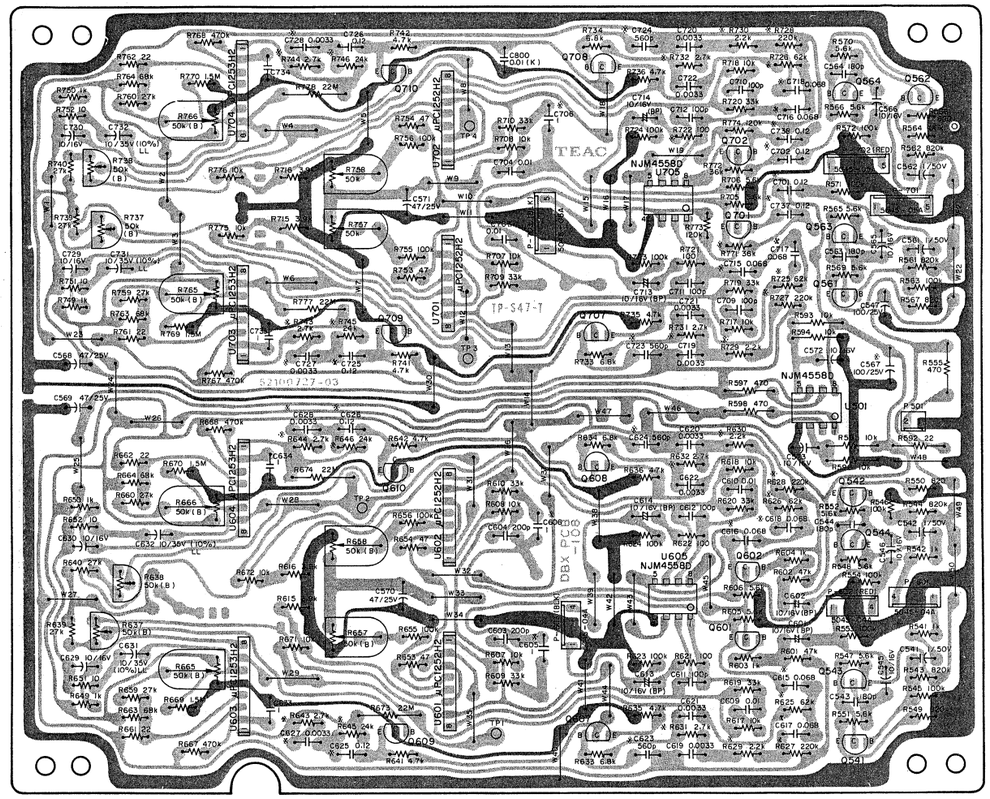

※ X-1000

R625	33k	R645	33k	R743	3.3k	C617	0.1	C706	0.3	C728	0.01
R626	33k	R646	33k	R744	3.3k	C618	0.1	C715	0.1	C737	0.1
R627	91k	R725	33k	R745	33k	C623	330p	C716	0.1	C738	0.1
R628	91k	R726	33k	R746	33k	C624	330p	C717	0.1	C567	1000/25V
R629	4.7k	R727	91k	R771	30k	C625	0.1	C718	0.1		
R630	4.7k	R728	91k	R772	30k	C626	0.1	C723	330p		
R631	33k	R729	4.7k	C605	0.3	C627	0.01	C724	330p		
R632	33k	R730	4.7k	C606	0.3	C628	0.01	C725	0.1		
R643	3.3k	R731	33k	C615	0.1	C701	0.1	C726	0.1		
R644	3.3k	R732	33k	C616	0.1	C702	0.1	C727	0.01		

NOTES

1. PC Board shown viewed from foil side.
2. The colors used on the PCB illustrations have the following significance:
   - : +B power supply circuit
   - : GND
   - : Other
3. Resistor values are in ohms (k = 1,000 ohms).
4. All capacitor values are in microfarads (p = picofarads).

REC/PLAY AMPL. PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	5200080611	PCB Assy [X-1000M]
	!5200080601	PCB Assy [X-1000]
	!5210080611	PCB [X-1000M]
	!5210080601	PCB [X-1000]
	IC's	
U301, U303	5220410900	TA75558P
U302	7220412200	TA7557P
	TRANSISTORS	
Q301, Q302	5042461000	2SC132TT
Q303~Q308	5145036000	2SC945LK
Q309~Q312	5145092000	2SC1T40LNS
Q313~Q315	5145036000	2SC945LK
Q317, Q318	5145185000	2SD655E
Q319~Q326	5145036000	2SC945LK
Q327~Q334	5145092000	2SC1740LNS
Q337	5145036000	2SD945LK
Q339	5145185000	2SC655E
Q341	5145036000	2SC945LK
Q342	5145150000	2SA1015QR
Q351	5145036000	2SC945LK
Q352, Q353	5145036000	2SC945LK [X-1000M]
Q360, Q361	5145036000	2SC945LK
Q371, Q372	6048071000	2N5462 [X-1000M]
Q373, Q374	5232007600	2SK336, FET [X-1000M]
	DIODES	
D301~D304	5042213000	IN60
D305~D308	5042517000	1S2473VE
D311	5042517000	1S2473VE
	CARBON RESISTORS	
	All resistors are rated ±5% tolerance and ¼W.	
R301, R302	5181550000	680kΩ
R305, R306	5181482000	1kΩ
R307, R308	5181530000	100kΩ
R309, R310	5181482000	1kΩ
R311, R312	5181472000	390Ω
R317, R318	5181544000	390kΩ
R319, R320	5181506000	10kΩ
R321, R322	5181482000	1kΩ
R323, R324	5181458000	100Ω
R325, R326	5181544000	390kΩ [X-1000M]
	5181540000	270kΩ [X-1000]
R331, R332	5181482000	1kΩ [X-1000]
R337~R340	5181498000	4.7kΩ
R341, R342	5181514000	22kΩ
R343, R344	5181490000	2.2kΩ
R345, R346	5181506000	10kΩ
R347, R348	5181514000	22kΩ
R349, R350	5181506000	5.6kΩ
R351, R352	5181514000	22kΩ
R355, R356	5181544000	390kΩ
R357, R358	5181524000	56kΩ
R359, R360	5181488000	1.8kΩ
R361, R362	5181544000	390kΩ
R363, R364	5181420000	39kΩ
R365, R366	5181500000	5.6kΩ
R367, R378	5181484000	1.2kΩ
R373	⚠5184265000	470Ω Nonflammable
R365, R376	5185132000	47kΩ 2%
R377, R378	5185136000	68kΩ 2%
R379, R380	5181508000	12kΩ
R381, R382	5181474000	470Ω

REF. NO.	PARTS NO.	DESCRIPTION
R383, R384	5181506000	10kΩ
R385, R386	5181488000	1.8kΩ
R387~R390	5181532000	120kΩ
R391, R392	5181522000	47kΩ
R393, R394	5181476000	560Ω
R395~R398	5181538000	220kΩ
R399, R400	5181498000	4.7kΩ
R401, R402	5181506000	10kΩ
R405, R406	5181498000	4.7kΩ
R407, R408	5181462000	150Ω
R409, R410	5181466000	220Ω
R411, R412	5181536000	180kΩ
R413, R414	5181524000	56kΩ
R415, R416	5181490000	2.2kΩ
R417, R418	5181446000	33Ω
R419, R420	5181482770	1kΩ
R421, R422	5181513000	100kΩ
R425, R426	5181532000	120kΩ
R427, R428	5181490000	2.2kΩ
R437, R438	5181484000	1.2kΩ [X-1000M]
R437~R440	5181462000	150Ω [X-1000]
R441~R444	5181460000	120Ω [X-1000]
R445~R452	5181514000	22kΩ
R453, R454	5181482000	1kΩ
R455~R458	5181538000	220kΩ
R459, R460	5181512000	18kΩ
R461, R462	5181510000	15kΩ
R463, R464	5181458000	100Ω
R465, R466	5181530000	100kΩ
R467, R478	5181484000	1.2kΩ
R469, R470	5181490000	2.2kΩ
R471, R472	5181484000	1.2kΩ
R473, R474	5181490000	2.2kΩ
R475~R478	5181514000	22kΩ
R479	⚠5184243000	56Ω Nonflammavle
R480	⚠5184229000	15Ω Nonflammable
R481	⚠5184257000	220Ω Nonflammable
R482	5181490000	2.2kΩ
R483	5181514000	22kΩ
R484	5181502000	6.8kΩ
R485	5181514000	22kΩ
R490	5181514000	22kΩ
R491	⚠5181990000	47Ω Nonflammalbe
R492	⚠5181996000	82Ω Nonflammable
R493	5181518000	33kΩ
R494	5181514000	22kΩ
R495	5181490000	2.2kΩ
R496	5181482000	1kΩ
R497	5181526000	68kΩ
R498	5181458000	100Ω
R499~R401	5181498000	4.7kΩ
R502	5181506000	10kΩ
R504	⚠5184265000	470Ω Nonflammable
R509~R514	5181514000	22kΩ
R523	5181482000	1kΩ
R524	5181484000	1.2kΩ
R550, R551	5181514000	22kΩ [X-1000M]
	5181518000	33kΩ [X-1000]
R552, R553	5181514000	22kΩ
R554, R555	5181506000	10kΩ [X-1000M]
R556, R557	5181514000	22kΩ [X-1000M]
R601, R602	5181506000	10kΩ [X-1000M]
R603, R604	5181530000	100kΩ [X-1000M]
R605, R606	5181552000	820kΩ [X-1000M]
R607, R608	5181530000	100kΩ [X-1000]

REF. NO.	PARTS NO.	DESCRIPTION
	CAPACITORS	
C305	5260165052	Elec. 47μF 10V 20%
C306	5260165552	Elec. 10μF 16V 20%
C311, C312	5171590000	Elec. 10μF 16V 20%
C313, C314	5172304000	Ceramic 22pF 50V 10%
C315, C316	5260162550	Elec. 10μF 16V 20%
C317, C318	5260165052	Elce. 47μF 10V 20%
C319, C320	5154844570	Myler 0.01μF 100V 5%
C321, C322	5260226110	Elec. 1μF 50V 10%
C323, C324	5170423000	Myler 0.0082μF 100V 5%[X-1000M]
	5054924500	Myler 0.039μF 100V 5%[X-1000]
C325, C326	5054890500	Myler 0.0039μF 100V 5%[X-1000M]
	5054881500	Myler 0.0033μF 35V 5% [X-1000]
C327	5054877500	Myler 0.01μF 100V 5%
C329, C330	5054881500	Myler 0.0033μF 35V 5%[X-1000M]
	5054894500	Myler 0.0082μF 100V 5%[X-1000]
C331, C332	5173056800	Elec. 220μF 25V
C355, C356	5260160750	Elec. 1μF 50V 20%
C359, C360	5260160750	Elec. 1μF 50V 20%
C361, C362	5172300000	Ceramic 10pF 50V 20%
C363, C364	5260160750	Elec. 1μF 50V 20%
C365	5260166152	Elec. 100μF 25V 20%
C381, C382	5260160750	Elec. 1μF 50V 20%
C383, C384	5260162552	Elec. 10μF 16V 20%
C385, C386	5172312000	Ceramic 100pF 50V 10%
C387, C388	5260222050	Elec. 10μF 35V 10%
C389	5260166152	Elec. 100μF 25V 20%
C391, C392	5260160750	Elec. 1μF 50V 20%
C393, C394	5260162550	Elec. 10μF 16V 20%
C395, C396	5054878500	Myler 0.01μF 100V 5%
C397, C398	5260165252	Elec. 47μF 25V 20%
C399	5260166150	Elec. 100μF 25V
C401, C402	5260162550	Elec. 10μF 16V
C403, C404	5172308000	Ceramic 47μF 50V 10%
C405, C406	5260166752	Elec. 220μF 6.3V
C407, C408	5260162050	Elec. 4.7μF 35V
C409, C410	5260165052	Elec. 47μF 10V
C411	5260166152	Elec. 100μF 25V
C413, C414	5054876500	Myler 0.0022μF 100V 5%
C415	5260166152	Elec. 100μF 25V
C417	5173070000	Elec. 470μF 6.3V
C419	5054738500	Myler 0.047μF 100V 5%
C421, C422	5260160750	Elec. 1μF 50V 20%
C423, C424	5260162550	Elec. 10μF 16V 20%
C425, C426	5054930500	Myler 0.15μF 100V 5%
C427, C428	5260222050	Elec. 10μF 35V 20%
C429, C430	5054889500	Myler 0.0027μF 100V 5%
C431, C432	5172820600	Polyst. 820pF 50V 5%
C433, C434	5054889500	Myler 0.0027μF 100V 5%
C435, C436	5054877500	Myler 0.01μF 100V 5%
C437	5173055800	Elec. 220μF 25V
C441, C442	5054877500	Myler 0.01μF 100V 5%
C443, C444	5170427000	Myler 0.012μF 100V 5%[X-1000M]
	5054887500	Myler 0.015μF 100V 5%[X-1000]
C445, C446	5054894500	Myler 0.0082μF 100V 5%
C447, C448	5054877500	Myler 0.01μF 100V 5%
C449	5054877500	Myler 0.01μF 100V 5%[X-1000]
C450, C451	5260162540	Elec. 10μF 25V
C455~C458	5172798000	Polyst. 59pF 50V 5%[X-1000M]
C455, C456	5172794000	Polyst. 39pF 50V [X-1000]
C457, C458	5172792000	Polyst. 33pF 50V 5%
C500, C501	5054878500	Myler 0.0039μF 100V 5%[X-1000M]
C554	5054877500	Myler 0.01μF 100V 5%

REF. NO.	PARTS NO.	DESCRIPTION
	VARIABLE RESISTORS	
R313, R314	5280003302	Semi-fixed 5kΩ(B)
R327, R328	5280003502	Semi-fixed 10kΩ(B)
R333, R334	5280003302	Semi-fixed 5kΩ(B)
R369, R370	5280003802	Semi-fixed 30kΩ(B)
R371, R372	5280003602	Semi-fixed 20kΩ(B)
R403, R404	5280003502	Semi-fixed 10kΩ(B)
R429, R430	5280003602	Semi-fixed 20kΩ(B)
R515, R516	5280004202	Semi-fixed 100kΩ(B)
R519, R520	5280004202	Semi-fixed 100kΩ(B)
	COILS	
L301, L302	5160170000	Choke 1200μH 5%
L303, L304	5056659000	Trap, 3 mH 20%
L305, L306	5056667000	Record, EQ, 1.5 - 2.4 mH [X-1000M] 20%
	5056637000	Record, EQ, 2.4 - 4.2 mH [X-1000] 20%
L310	5056659000	Dummy, 3 mH 20%
	SWITCHES	
S302~S304	5300024300	Push, 2-2
S306	5134094000	Push, 2-2
S311	5134094000	Push, 2-2
S312	5134094000	Push, 2-2
	CONNECTOR PLUGS	
P301	5122126000	2P
P302	5122299000	2P (RED)
P303	5122128000	4P
P304	5122126000	2P
P305	5122299000	2P (RED)
	MISCELLANEOUS	
K301	5061237000	Relay, Reed; LAB2L 12V
K302	5290009400	Relay, G2V-282P 24V
U305	5040090000	OSC Unit

CONTROL PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	5200098400	PCB Assy
	5210098400	PCB
	IC's	
U31	5220019700	LC7800
U32	5200803400	LM7402A
U33	5220015600	TD62302P
U34	5220803501	LM6405A
U35	5147055000	NJM2403D
U36, U37	5293002500	01-0299
U38	5293002600	01-0396
U39	5293002700	01-0397
	TRANSISTORS	
Q31	5230016100	2SA950Y
Q32	5042383000	2SC536F
Q33	5102553000	2SA733P
Q34, Q37	5042383000	2SC536F
Q38, Q39	5042553000	2SA733P
Q40	5042383000	2SC536F
Q41	5012553000	2SA733P
Q42, Q43	5042383000	2SC536F
Q44, Q48	5230016100	2SA950Y
Q49, Q50	5142383000	2SC536F

REF. NO.	PARTS NO.	DESCRIPTION
Q51, Q53	5042553000	2SA733P
Q55 ~ Q57	5042564000	2SC1061C
Q59	5052383000	2SC536F
Q60	5042553000	2SA733P
Q62	5042625000	2SC1318S
Q63	5145129000	2SB507E
Q64	5042625000	2SC1318S
Q65	5145129000	2SB507E
Q67 ~ Q68	5042383000	2SC536F
	DIODES	
D33, D34	5042517000	192743VE
D39 ~ D41	5143243000	ERB12-02G1
D44	5143243000	ERB12-02G1
	RESISTORS	
	All resistors are rated ±5% tolerance ¼W and, of carbon type unless otherwise noted.	
R10	5184225000	10Ω Nonflemable
R11	5183114000	22kΩ
R12	5181482000	1kΩ
R13	5181522000	47kΩ
R14	5184763000	220Ω 1W Metal Film
R15	5181494000	3.3kΩ
R16	5183082000	1kΩ
R17	5183122000	47kΩ
R18	5184763000	220Ω 1W Metal Film
R19	5183094000	3.3kΩ
R20	5181554000	1MΩ
R21	5181530000	100kΩ
R22, R23	5181506000	10kΩ
R24	5181511400	22kΩ
R25	5181456000	82Ω
R26 ~ R29	5181506000	10kΩ
R31	5181514000	22kΩ
R32	5181482000	1kΩ
R33	5183118000	33kΩ
R34	5183110000	15kΩ
R36, R37	5181506000	10kΩ
R38	5181522000	47kΩ
R39	5181514000	22kΩ
R40 ~ R42	5181506000	10kΩ
R43	518147000	330Ω
R44	5181514000	22kΩ
R45	5181522000	47kΩ
R46	5181514000	22kΩ
R47, R48	5181506000	10kΩ
R49	5181470000	330Ω
R50	5181506000	10kΩ
R51	5181510000	15kΩ
R52	5181522000	47kΩ
R53	5181530000	100kΩ
R54	5181510000	15kΩ
R55	5181522000	47kΩ
R56	5181530000	100kΩ
R57	5181522000	47kΩ
R58	5181506000	10kΩ
R59	5181482000	1kΩ
R60	5181486000	1.5kΩ
R61	5181506000	10kΩ
R62	5181522000	47kΩ
R63, R65	5181460000	120Ω
R66	5181482000	1kΩ

REF. NO.	PARTS NO.	DESCRIPTION
R67 ~ R73	5181456000	82Ω
R74 ~ R78	5181482000	1kΩ
R79	5181506000	10kΩ
R80	5181470000	330Ω
R81	5181506000	10kΩ
R82	5181470000	330Ω
R83, R84	5183062000	150Ω
R85	5181460000	120Ω
R86 ~ R88	5181506000	10kΩ
R90 ~ R92	5180062000	50Ω
R94 ~ R96	5181514000	22kΩ
R97	5181488000	1.8kΩ
R99	5181514000	22kΩ
	CAPACITORS	
C31	5260162050	Elec. 4.7μF 35V 20%
C32	5260165052	Elec. 47μF 10V 20%
C33	5260162050	Elec. 4.7μF 35V 20%
C34, C35	5054342000	Polyst. 220pF 50V 10%
C37	5260162050	Elec. 47μF 35V 20%
C38 ~ C40	5172336000	Ceramic 0.01μF 50V 20%
	CONNECTOR PLUG	
P32	5122158000	15P
P33	5122132000	8P
P35	5122138000	14P
P37	5122127000	3P
P38	5122299000	2P (RED)
P39	5122126000	2P
	MISCELLANEOUS	
CR31	5347000900	KBR-800H
J31	5334010100	Connector 12P
J36	5334025000	Socket, DIN; 5P x I330

MIC AMPL. PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	5200045510	PCB Assy
	5167935000	PCB
	TRANSISTORS	
Q511, Q512	5042461000	2SC1327T
	CARBON RESISTORS	
	All resistors are rated ±5% tolerance and ¼W.	
R511, R512	5183082000	1kΩ
R513, R514	5183140000	270kΩ
R515, R516	5183126000	68kΩ
R517, R518	5183122000	47kΩ
R519, R520	5183060000	120Ω
R521, R522	5183108000	12kΩ
R525	5183084000	1.2kΩ
	CAPACITORS	
C511, C512	5171597000	Elec. 10μF 16V 20%
C513, C514	5172300000	Ceramic 10μF 50V 10%
C515, C516	50546461000	Dip, tant.
C517, C518	5055405000	Elec. 40μF 16V
C519	5055417000	Elec. 100μF 25V
	MISCELLANEOUS	
	5124045000	Jack, MIC

VR PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	5200035900	PCB Assy
	5120035900	PCB
	CARBON RESISTORS	
R525~R528	5183058000	100Ω ¼W 5%
	VARIABLE RESISTORS	
R529, R530	5282706002	Semi-fixed 50kΩ(A)
R537~R540	5282706002	Semi-fixed 50kΩ(A)

POWER/SERVO PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	5200098510	PCB Assy
	5210098500	PCB
	IC's	
U103	5220019800	HD14584B
U104, U105	5220015900	HD14011BP
U201~U203	5220407200	LM2904N
U204	5220017100	HD14066BP
U205, U206	5293000900	TD62504P
	TRANSISTORS	
Q102	5042625000	2SC1318S
Q103	5042383000	2SC536F
Q151	5145129000	2SB507E
Q152	5042625000	2SC1318S
Q154	5145129000	2SB507E
Q155	5042625000	2SC1318S
Q156, Q157	5145150000	2SA1015GR
Q158, Q159	5145151000	2SC1815GR
Q201, Q203	5145151000	2SC1815GR
Q202,	5145150000	2SA1015GR
Q205	5145151000	2SC1815GR
Q206	5145150000	2SA1015GR
Q207	5145102000	2SK68AL
	DIODES	
D101~D106	5143243000	ERB12-02G1
D108	5143154000	Zener, EQA01-06S
D109, D110	5143243000	ERB12-02G1
D201~D213	5143118000	1S2473HJ
D214, D217	5143243000	ERB12-02G1
D216	5143118000	1S2473HJ
D219	5042515000	Zener, WZ-090
D220	5143243000	ERB12-02G1
D221~D222	5143118000	1S2473HJ
D224	5143118000	1S2473HJ

REF. NO.	PARTS NO.	DESCRIPTION	
	RESISTORS		
	All resistors are rated ±5% tolerance, ¼W and of carbon type unless otherwise noted.		
R101, R201	5181530000	100kΩ	
R103, R203	5181506000	10kΩ	
R104, R204	5181522000	47kΩ	
R105, R205	5131482000	1kΩ	
R106, R206	5131530000	100kΩ	
R107, R207	5181530000	100kΩ	
R108, R208	5181522000	47kΩ	
R109, R209	5181482000	1kΩ	
R110, R210	5181538000	220kΩ	
R111, R211	5181522000	47kΩ	
R112, R212	5181522000	47kΩ	
R113, R213	5181506000	10kΩ	
R114, R214	5181514000	22kΩ	
R115, R215	5181506000	10kΩ	
R116, R216	5181506000	10kΩ	
R117, R217	5181442000	22Ω	
R118, R218	5185190000	0.22Ω	2W
R121, R221	5181506000	10kΩ	
R122	5181522000	47kΩ	
R123	5181518000	33kΩ	
R124	5181514000	22kΩ	
R125, R225	5181518000	33kΩ	
R126	5181514000	22kΩ	
R131, R133	5183094000	3.3kΩ	
R132	5184816000	1.2kΩ	2W Meral Film
R134	5181522000	47kΩ	
R151	⚠5184209000	2.2Ω	Nonflammable
R152	5181472000	390Ω	
R153	5181478000	680Ω	
R154	5184306000	3.3Ω	2W 10% Cement
R155	5181502000	6.8kΩ	
R156	5183150600	10kΩ	
R157	5181496000	3.9kΩ	
R158	5181512000	18kΩ	
R159	5181502000	6.8kΩ	
R160	⚠5184233000	22Ω	Nonflammable
R161	5185066000	10kΩ	
R162	5184306000	3.3Ω	2W 10% Cement
R181	5181494000	3.3kΩ	
R182	5184816000	1.2kΩ	2W Metal Film
R183	5181506000	10kΩ	
R184	5181522000	47kΩ	
R185	5181478000	68Ω	
R186, R187	5181506000	10kΩ	
R188	5181530000	100kΩ	
R191	5181494000	3.3kΩ	
R226	5181518000	33kΩ	
R227	5181514000	22kΩ	
R228	5181530000	100kΩ	
R229	5181506000	10kΩ	
R230	5181554000	1MΩ	
R231	5181499000	5.1kΩ	
R232	5181506000	10kΩ	
R233	5181562000	2.2MΩ	
R234	5181458000	100Ω	
R235	5181530000	100kΩ	
R251, R252	5181530000	100kΩ	
R253, R254	5181518000	33kΩ	
R258, R259	5181514000	22kΩ	
R261, R262	5181530000	100kΩ	

REF. NO.	PARTS NO.	DESCRIPTION				
R265	5181506000	10kΩ				
R266~R272	5181514000	22kΩ				
R281~R283	5181514000	22kΩ				
R284	5181520000	39kΩ				
R285	5181538000	220kΩ				
R286	5181536000	180kΩ				
R287	5181514000	22kΩ				
R290	5181514000	22kΩ				
R291	5181458000	100Ω				
R292	5181470000	330Ω				
R293	5181520000	39kΩ				
R294	5181490000	2.2kΩ				
R295	5181478000	680Ω				
R300	5184304000	5.6Ω	2W Cement			
R301	5184751000	68Ω	1W Metal Film			
	CAPACITORS					
C102, C202	5170513000	Myler	0.056μF	100V	10%	
C104, C203	5170531000	Myler	0.33μF	100V	10%	
C104, C204	5170491000	Myler	0.068μF	100V	10%	
C105. C205	5170519000	Myler	0.1μF	100V	10%	
C107, C207	5170519000	Myler	0.1μF	100V	10%	
C108, C208	5170519000	Elec.	10μF	50V	10%	
C109	5260160550	Elec.	0.47μF	50V	20%	
C131, C132	5171237000	Elec.	569pF	125V	10%	
C133	5260160550	Elec.	0.47μF	50V	20%	
C134	5170519000	Myler	0.1μF	100V	10%	
C135	5260160550	Elec.	0.47μF	50V	20%	
C136	5170475000	Myler	0.0015μF	100V	10%	
C151, C152	5173072000	Elec.	470μF	16V		
C153	5173084000	Elec.	1000μF	50V		
C154	5173047000	Elec.	100μF	35V		
C155	5173056800	Elec.	220μF	35V		
C156	5173047800	Elec.	100μF	35V		
C157, C158	5173089000	Elec.	2200μF	25V		
C159, C160	5173084000	Elec.	1000μF	50V		
C161	5260160750	Elec.	1μF	50V	20%	
C162	5172336000	Ceramic	0.01μF	50V	20%	
C163	5172348000	Ceramic	0.1μF	50V	10%	
C164	5172336000	Ceramic	0.01μF	50V	20%	
C165~C169	5267010300	Ceramic	10000pF	500V		
C170	5173089000	Elec.	2200μF	25V		
C171	5263164900	Metalized	0.1μF	250V	10%	
C191	5170475000	Myler	0.0015μF	100V	10%	
	VARIABLE RESISTORS					
R120, R220	5280001502	Semi-fixed	50kΩ (B)			
R289	5280001502	Semi-fixed	50kΩ (B)			
	CONNECTOR PLUGS					
P101	5122151000	8P				
P102	5122455000	4P	(RED)			
P103	5122145000	2P				
P104	5122454000	3P	(RED)			
P105	5122150000	7P				
P106	5122146000	3P				
P107	5122203000	3P	(BLK)			
P108	5122147000	4P				
P109	5122146000	3P				
P110	5122146000	3P				
P111	5122454000	3P	(RED)			

DBX PCB Type I/Type II

REF. NO.	PARTS NO.	DESCRIPTION	
	5200067624	PCB Assy [X-1000M]	
	5200067634	PCB Assy [X-1000]	
	5210072703	PCB [X-1000M]	
	5210072703	PCB [X-1000]	
	IC's		
U501	5042738000	NUM4558D	
U601, U602	5220414501	μPC1252H-2	
U603, U604	5220414601	μPC1253H-2	
U605	5042738000	NJM4558D	
U701, U702	5220414501	μPC1252H-2	
U703, U704	5220414601	μPC1253H-2	
U705	5042738000	NJM4558D	
	TRANSISTORS		
Q541, Q542	5145151000	2SC1815GR	
Q543, Q544	5145132000	2SA933LNS	
Q561, Q562	5145151000	2SC1815GR	
Q563, Q564	5145132000	2SC933LNS	
Q601, Q602	5145151000	2SC1815GR	
Q607, Q608	5145151000	2SC1815GR	
Q609, Q610	5145150000	2SA1015GR	
Q701, Q702	5145151000	2SC1815GR	
Q707, Q708	5145151000	2SC1815GR	
Q709, Q710	5145150000	2SA1015GR	
	CARBON RESISTORS		
	All resistors are rated ±5% tolerance and ¼W.		
R541, R542	5240028200	4kΩ	
R543, R544	5240035200	820kΩ	
R545, R546	5240033000	100kΩ	
R547, R548	5240030000	5.6kΩ	
R549, R550	5240028000	820Ω	
R551, R552	5240030000	5.6kΩ	
R553, R554	5240033000	100kΩ	
R555	⚠5184265000	470Ω	Nonflammable
R561, R562	5240035200	820kΩ	
R563, R564	5240033000	100kΩ	
R565, R566	5240030000	5.6kΩ	
R567, R568	5240028000	820Ω	
R569, R570	5240030000	5.6kΩ	
R571, R572	5240033000	100kΩ	
R592	⚠5184233000	22Ω	Nonflammable
R593~R596	5183106000	10kΩ	
R597, R598	5183074000	470Ω	
R601, R602	5240032200	47kΩ	
R603, R604	5240028200	1kΩ	
R605, R606	5240030000	5.6kΩ	
R607, R608	5240030600	10kΩ	
R609, R610	5240031800	33kΩ	
R615, R616	5240029600	3.9kΩ	
R617, R618	5240030600	10kΩ	
R619, R620	5240031800	33kΩ	
R621, R622	5240025800	100Ω	
R623, R624	5240033000	100kΩ	
R625, R626	5240032500	62kΩ	[X-1000M]
	5240031820	33kΩ	[X-1000]
R627, R628	5240033800	220kΩ	[X-1000M]
	5240032920	91kΩ	[X-1000]
R629	524002900	2.2kΩ	[X-1000M]
R630	5240029800	4.7kΩ	[X-1000]
R631, R632	5240029200	2.7kΩ	[X-1000M]
	5240031820	33kΩ	[X-1000]
R633, R634	5240030200	6.8kΩ	
R635, R636	5340029800	4.7kΩ	
R639, R640	5340031600	27kΩ	
R641, R642	5240029800	4.7kΩ	

REF. NO.	PARTS NO.	DESCRIPTION
R643, R644	5240029420	3.3kΩ [X-1000]
R645, R646	5240031500	24kΩ [X-1000M]
	5240031820	33kΩ [X-1000]
R649, R650	5240028200	1kΩ
R651, R652	5240023400	10Ω
R653, R654	5240025000	47Ω
R655, R656	5240033000	100kΩ
R659, R660	5240031600	27kΩ
R661, R662	5240024200	22Ω
R663, R664	5240032600	68kΩ
R667, R668	5240034600	470kΩ
R669, R670	5240175800	1.5MΩ
R671, R672	5240030620	10kΩ
R673, R674	5240319000	22MΩ
R705, R706	5240300000	5.6kΩ
R707, R708	5240030600	10kΩ
R709, R710	5240031800	33kΩ
R711, R712	5240029200	2.7kΩ
R715, R716	5240029600	3.9Ω
R717, R718	5240030600	10kΩ
R719, R720	5200031800	33kΩ
R721, R722	5240025800	100Ω
R723, R724	5240033000	100kΩ
R725, R726	5240032500	62kΩ [X-1000M]
	5240031820	33kΩ [X-1000]
R727, R728	5240032800	220kΩ [X-1000M]
	5240032920	91kΩ [X-1000]
R729, R730	5240029000	3.6kΩ [X-1000M]
	5240029820	4.7kΩ [X-1000]
R731, R732	5240029200	2.7kΩ [X-1000M]
	5240031820	33kΩ [X-1000]
R733, R734	5240030200	6.8kΩ
R735, R736	5240029800	4.7kΩ
R739, R740	5240031600	27kΩ
R741, R742	5240029800	4.7kΩ
R743, R744	5240029200	2.7kΩ [X-1000M]
	5240029420	3.3kΩ [X-1000]
R745, R746	5240031500	24kΩ [X-1000M]
	5240031820	33kΩ [X-1000]
R749, R750	5240028200	1kΩ
R751, R752	5240023400	10Ω
R753, R754	5240025000	47Ω
R755, R756	5240033000	100kΩ
R759, R760	5240031600	27kΩ
R761, R762	5240024200	22Ω
R763, R764	5240032600	68kΩ
R767, R768	5240034600	470Ω
R769, R770	5240175800	1.5MΩ
R771, R772	5240031920	36kΩ [X-1000M]
	5240031720	30kΩ [X-1000]
R773, R774	5240033220	120kΩ
R775, R776	5240030620	10kΩ [X-1000M]
R777, R778	5240319000	22MΩ [X-1000]

CAPACITORS

C541, C542	5142882000	Elec.	1μF	50V	
C543, C544	5142315000	Ceramic	180μF	50V	10%
C545, C546	5172900000	Elec.	10μF	16V	
C547	5173046000	Elec.	100μF	25V	
C561, C562	5172882000	Elec.	1μF	50V	

REF. NO.	PARTS NO.	DESCRIPTION
C563, C564	5172315000	Ceramic 180pF 50V 10%
C565, C566	5172900000	Elec. 10μF 16V
C567	5173082000	Elec. 1000μF 25V
C568~C571	5173037000	Elec. 47μF 25V
C572, C573	5172900000	Elec. 10μF 16V
C601, C602	5171482000	Elec. 10μF 16V B.P
C603, C604	5263106100	Polyst. 200pF 100V 5%
C605, C606	5263163413	Metalized 1μF 50V 5% [X-1000M]
	5263163515	Meralized 0.3μF 50V 5% [X-1000]
C609, C610	5170425000	Myler 0.01μF 100V 5%
C611, C612	5172312000	Ceramic 100μF 50V 10%
C613, C614	5260067050	Elec. 10μF 16V 20%
C615~C618	5170445000	Myler 0.068μF 100V 5% [X-1000M]
	5263162213	Meralized 0.1μF 50V 5% [X-1000]
C619~C622	5170413000	Myler 0.0033μF 100V 5%
C623, C624	5172321000	Ceramic 560pF 50V 10%
C625, C626	5263162313	Metalized 0.12μF 50V 5% [X-1000M]
	5263162213	Metalized 0.1μF 50V 5% [X-1000]
C627, C728	5170413000	Myler 0.0033μF 100V 5% [X-1000M]
	5170425000	Myler 0.01μF 100V 5% [X-1000]
C629, C630	5173010000	Elec. 10μF 16V
C631, C632	5260227010	Elec. 10μF 35V 10%
C633, C634	5263163413	Metalized 1μF 50V 5%
C701, C702	5263162313	Metalized 0.12μF 50V 5%
C703, C704	5170425000	Myler 0.01μF 100V 5%
C705, C706	5263163413	Metalized 1μF 50V 5%
C709~C712	5172312000	Ceramic 100pF 50V 10%
C713, C714	5171482000	Elec. 10μF 16V
C715~C718	5170144500	Myler 0.068μF 100V 5% [X-1000M]
	5263162213	Metalized 0.1pF 50V 5% [X-1000]
C719~C722	5170413000	Myler 0.0033μF 100V 5%
C723, C724	5172321000	Ceramic 560pF 50V 10% [X-1000M]
	5263162213	Metalized 0.1μF 50V 5% [X-1000]
C725, C726	5263162313	Metalized 0.12μF 50V 5% [X-1000M]
	5263162213	Metalized 0.1μF 50V 5% [X-1000]
C727, C728	5170413000	Myler 0.0033μF 100V 5% [X-1000M]
	5170425000	Myler 0.01μF 100V 5% [X-1000]
C729, C730	5173010000	Elec. 10μF 16V
C731, C732	5260227010	Elec. 10μF 35V 10%
C733, C734	5263163413	Metalized 1μF 50V 5%
C735	5173393000	Ceramic 0.01μF 50V 10% [X-1000M]
C735, C736	5263162213	Metalized 0.1μF 50V 5% [X-1000]
C737, C738	5263162313	Metalized 0.12μF 50V 5% [X-1000]

VARIABLE RESISTORS

R637, R638	5280001502	Semi-fixed	50kΩ(B)
R657, R658	5280004002	Semi-fixed	50kΩ(B)
R665, R666	5280004002	Semi-fixed	50kΩ(B)
R737, R738	5280001502	Semi-fixed	50kΩ(B)
R757, R758	5280004002	Semi-fixed	50kΩ(B)
R765, R766	5280004002	Semi-fixed	50kΩ(B)

CONNECTOR PLUGS

P501	5122126000	2P	
P601	5122128000	4P	
P602	5122301000	4P	(RED)
P603	5122185000	4P	(BLK)
P701	5122129000	5P	
P702	5122302000	5P	(RED)
P703	5122186000	5P	(BLD)

VR PCB ASSY (POWER/SERVO)

REF. NO.	PARTS NO.	DESCRIPTION
	5200083800	PCB Assy
	5210083800	PCB
		CARBON RESISTORS
R257, R260	5183118000	33kΩ ¼W 5%
		VARIABLE RESISTORS
R237, R238	5280003502	10kΩ (B)

DBX SWITCH PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200072410	PCB Assy
	5210072400	PCB
		TRANSISTORS
Q501, Q502	5145185000	2SD655E
		CARBON RESISTORS
R501, R502	5183100000	5.6kΩ 5% ¼W
		SWITCH
S501	5300030600	Push, 6-2

ROLLER SENSOR PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200067201	PCB Assy
	5210067201	PCB
U801, U802	5228007100	Interrupter, ON1122

TENSION SENSOR PCB ASSY (PC Board omitte.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200067402	PCB Assy
	5210067402	PCB
		RESISTORS
R811~R813	5183060000	120Ω ¼W 5%
R814	5241151800	33kΩ ¼W 5% Metal Film
		MISCELLANEOUS
U801	5228007000	Interruper, PH101

TIMER PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	520009900	PCB Assy
	5210067300	PCB
		MISCELLANEOUS
S803	5300020700	Push Switch 2-2
P803	5122126000	Connector Plug, 2P
P808	5122128000	Connector Plug, 4P

PITCH CONTROL PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200072300	PCB Assy
	5210072300	PCB
	5150239000	Var, Res 5kΩ (B)

FUSE PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5168997000	FUSE PCB Assy [U, C]
F1, F2	⚠5307004700	Fuse 7A 125V
F3	⚠5307004100	Fuse 2A 250V
	5041237000	Fuse Holder
	5158105000	Fuse PCB Assy [E, UK, A]
	5157105000	PCB Assy
	⚠5142193000	Mini Fuse 5A 250V
	⚠5142189000	Mini Fuse 2A 250V
	5142087000	Fuse Holder

IN/OUTPUT TERMINAL PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200036000	PCB Assy
	5167987101	PCB
	5124058000	Jack, 4P
		CARBON RESISTORS
R535, R536	5183120000	39kΩ ¼W 5%

TRANSISTOR B PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200079100	PCB Assy
	5210079100	PCB
	IC's	
U820	⚠5120415100	NJM78M05A
U801	⚠5220413100	NJM78M15A
	TRANSISTOR	
Q820	⚠5145087000	2SD313E
	CAPACITORS	
C820~C823	5172992000	Elec. 1μF 50V
	MISCELLANEOUS	
	5033291000	Plate, Insulatimg
	5033295000	Tube, Insulating

TRANSISTOR PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200073100	PCB Assy
	5210073100	PCB
Q801	5145171000	Transistor, 2SD7180

DIODE PCB ASSY (PC Board omittd.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200079000	PCB Assy
	5210079000	PCB
	DIODE	
D107	⚠5228008000	BA60-B1D

LED PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTON
	5200072500	PCB Assy
	5210072500	PCB
D501, D502	5225006700	LED TLG124A (GREEN)

EQ SWITCH PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200099700	PCB Assy
	5210098800	PCB
	5300909300	Slide,Swtich; 4-2N
	5800404500	Holder, Swtich

TENSION SENSOR PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200067402	PCB Assy
	5210067402	PCB
	CARBON RESISTOR	
	All resistors are rated ±5% tolerance ¼W and, of carbon type unless otherwise noted.	
R810, R811	5241426602	5.1kΩ; LT1/8 Metal Film
R812	5183080000	82Ω
R813	5183099000	5.1kΩ
	MISCELLANEOUS	
	6048807000	Interrupter, ON1102

SWITCH PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200098800	PCB Assy
	5210098800	PCB
R101, R102	5240034220	Carbon Resistor, 330kM ±5% ¼W
	5300909000	Slide, Switch; 4-2S:SSB-042BQ

KEYBOARD PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200098700	PCB Assy
	5210098700	PCB
S810~S817	5302101600	Tact Switch; J-M0452
S819~S824	5302101600	Tact Switch; J-M0452
D810~D813	5225010500	LED, GL-5HD22
D814, D815	5225005900	LED, SLP-151B

SPEED SWITCH PCB ASSY (PC Board omitted.)

REF. NO.	PARTS NO.	DESCRIPTION
	5200098610	PCB Assy [X-1000M]
	5200098600	PCB Assy [X-1000]
	5210098601	PCB
	CONNECTOR PLUGS	
	5122300000	3P (RED)
	5122301000	4P (RED)
	5122129000	5P
	5122132000	8P
	MISCELLANEOUS	
	5300018400	Switch, Push; 4-2M
	5300030500	Switch, Push; 3-gang

X-1000M

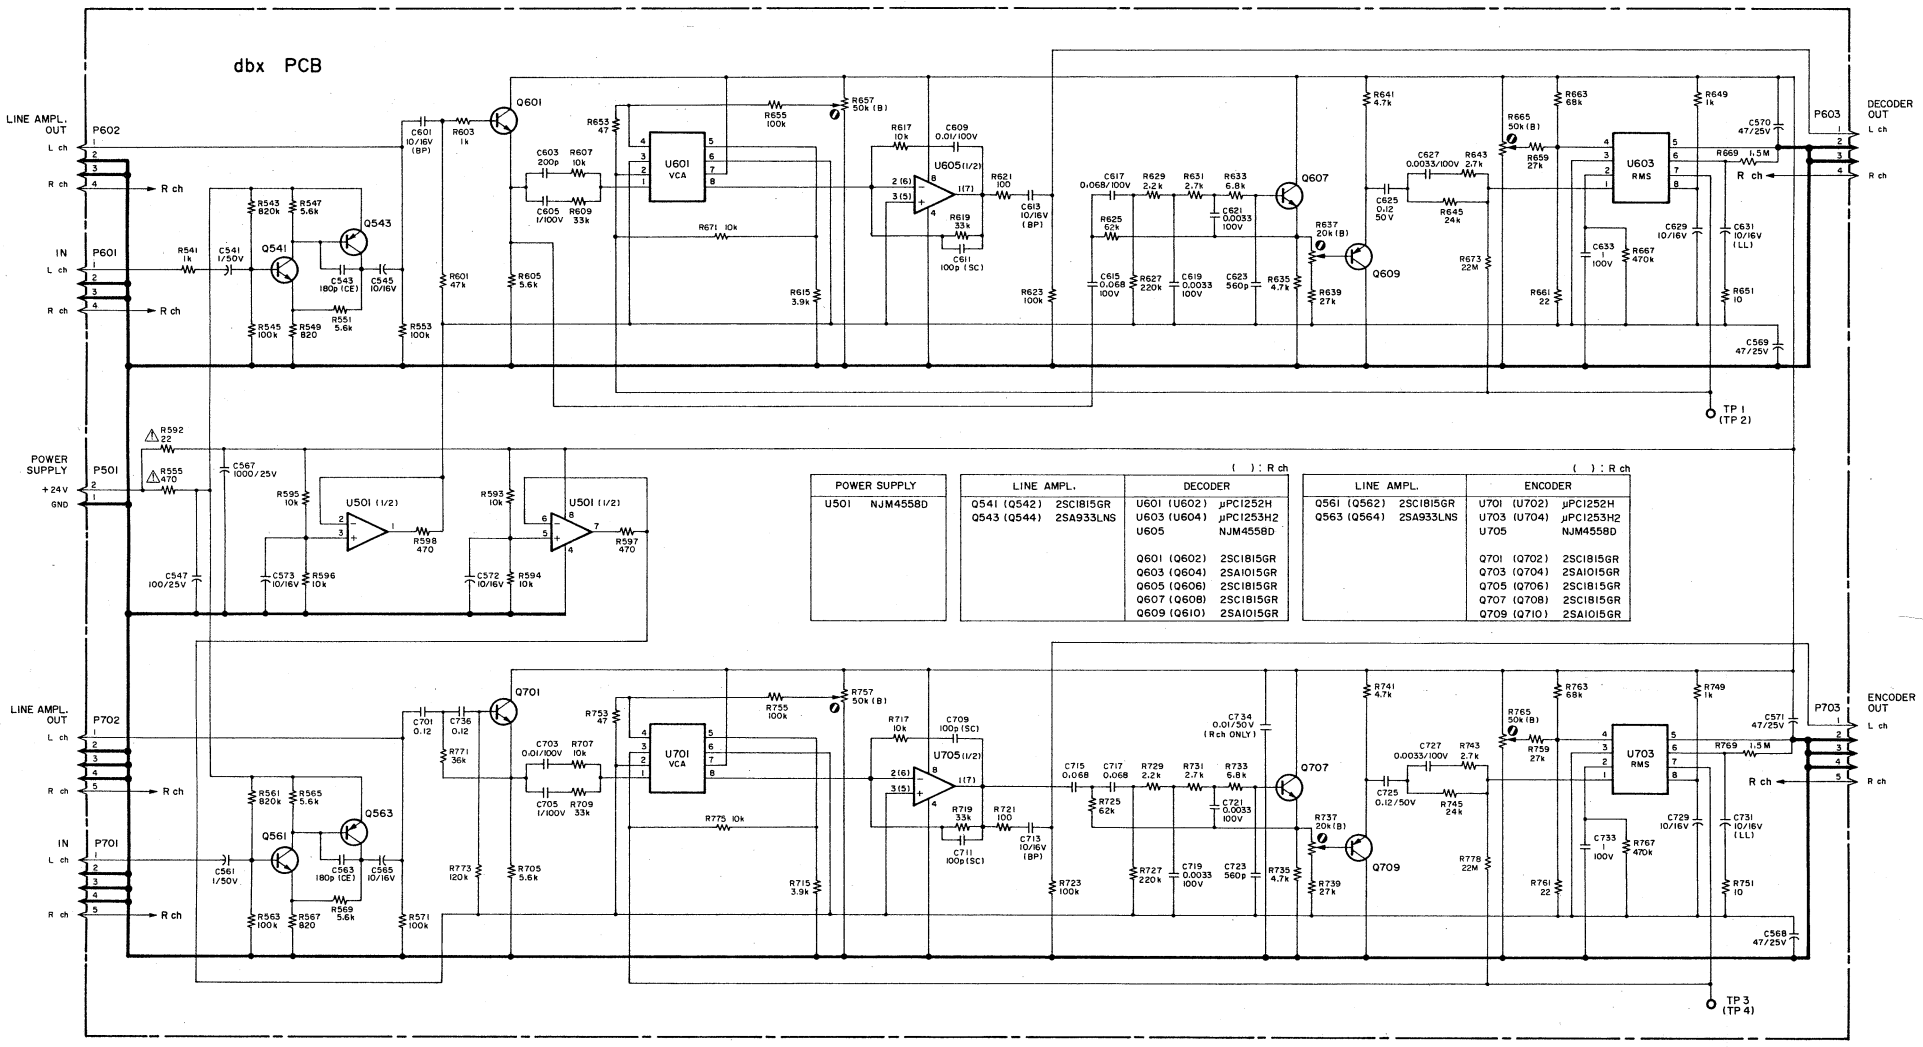

POWER SUPPLY	
U501	NJM4558D

LINE AMPL.	
Q541 (Q542)	2SC1815GR
Q543 (Q544)	2SA933LNS

( ) : R ch

DECODER	
U601 (U602)	μPC1252H
U603 (U604)	μPC1253H2
U605	NJM4558D
Q601 (Q602)	2SC1815GR
Q603 (Q604)	2SA1015GR
Q605 (Q606)	2SC1815GR
Q607 (Q608)	2SC1815GR
Q609 (Q610)	2SA1015GR

LINE AMPL.	
Q561 (Q562)	2SC1815GR
Q563 (Q564)	2SA933LNS

( ) : R ch

ENCODER	
U701 (U702)	μPC1252H
U703 (U704)	μPC1253H2
U705	NJM4558D
Q701 (Q702)	2SC1815GR
Q703 (Q704)	2SA1015GR
Q705 (Q706)	2SC1815GR
Q707 (Q708)	2SC1815GR
Q709 (Q710)	2SA1015GR

X-1000

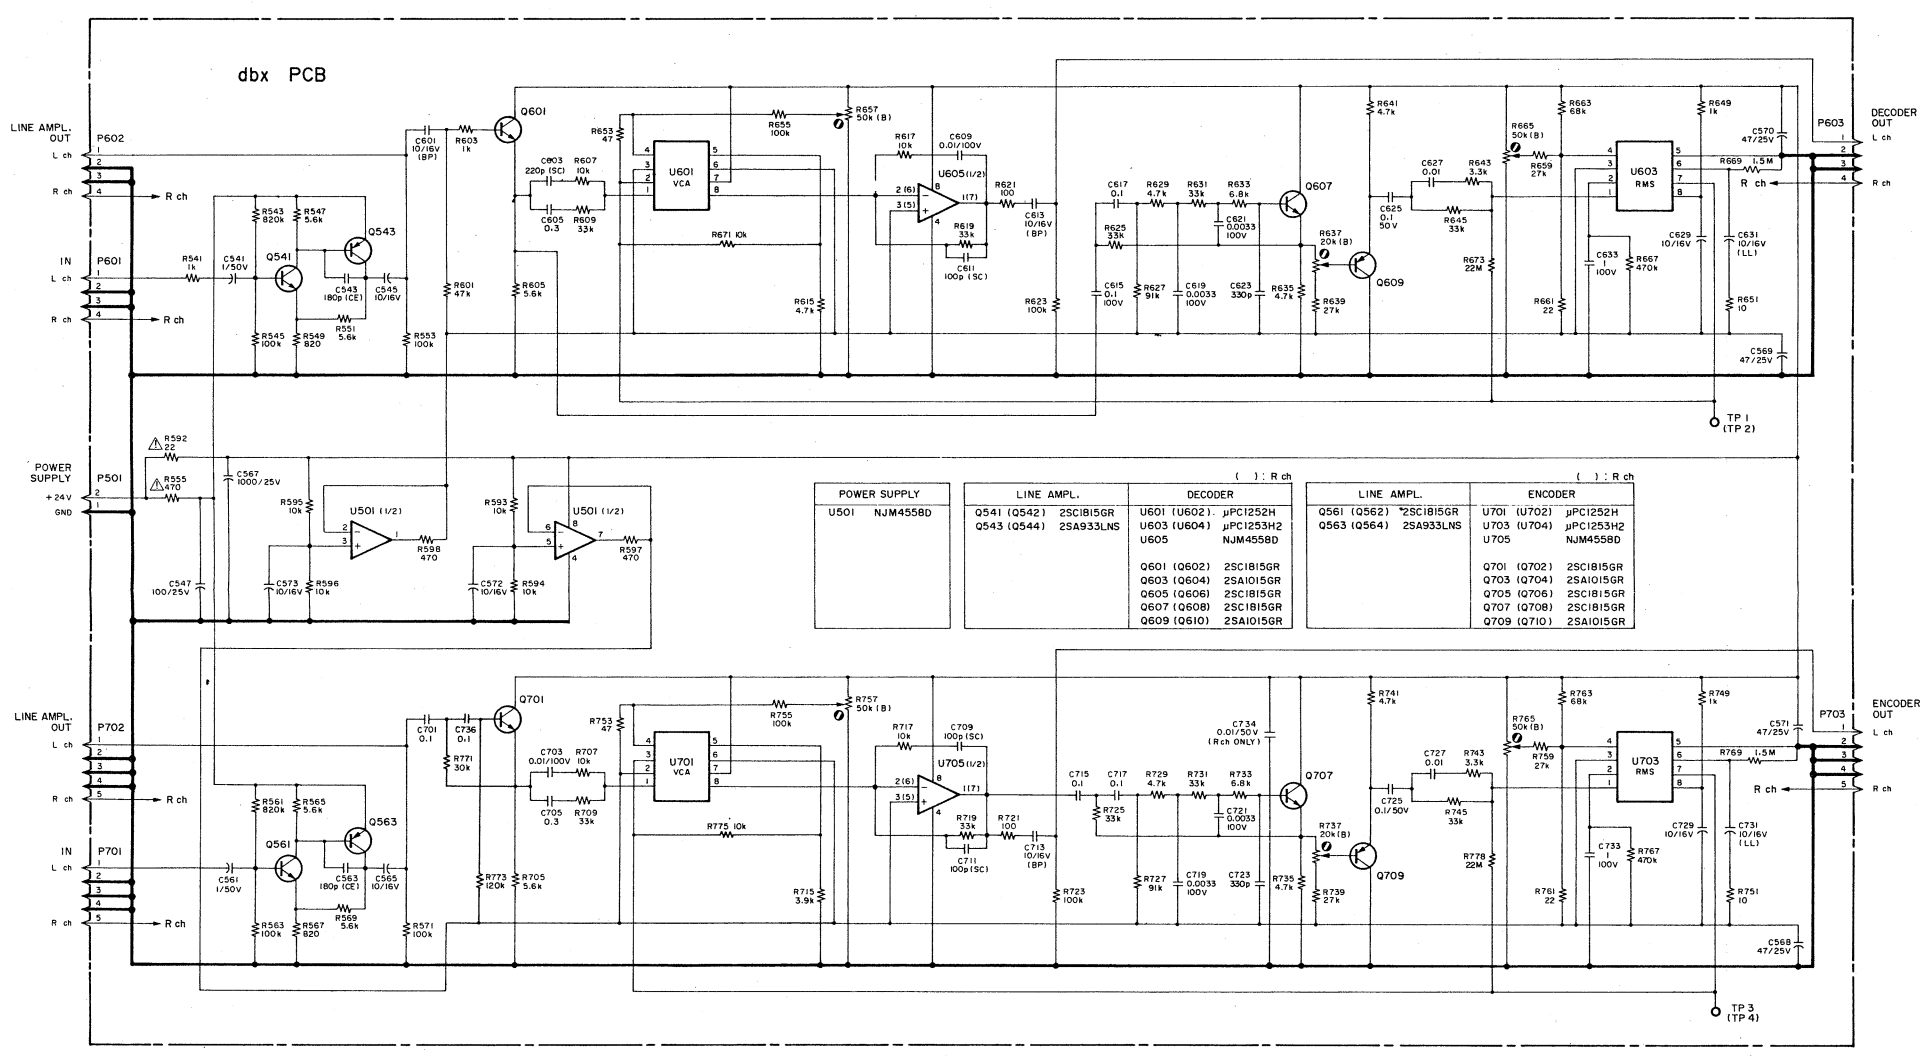

POWER SUPPLY	
U501	NJM4558D

LINE AMPL.	
Q541 (Q542)	2SC1815GR
Q543 (Q544)	2SA933LNS

( ) : R ch

DECODER	
U601 (U602)	μPC1252H
U603 (U604)	μPC1253H2
U605	NJM4558D
Q601 (Q602)	2SC1815GR
Q603 (Q604)	2SA1015GR
Q605 (Q606)	2SC1815GR
Q607 (Q608)	2SC1815GR
Q609 (Q610)	2SA1015GR

LINE AMPL.	
Q561 (Q562)	2SC1815GR
Q563 (Q564)	2SA933LNS

( ) : R ch

ENCODER	
U701 (U702)	μPC1252H
U703 (U704)	μPC1253H2
U705	NJM4558D
Q701 (Q702)	2SC1815GR
Q703 (Q704)	2SA1015GR
Q705 (Q706)	2SC1815GR
Q707 (Q708)	2SC1815GR
Q709 (Q710)	2SA1015GR

TEAC®

X-1000M/X-1000

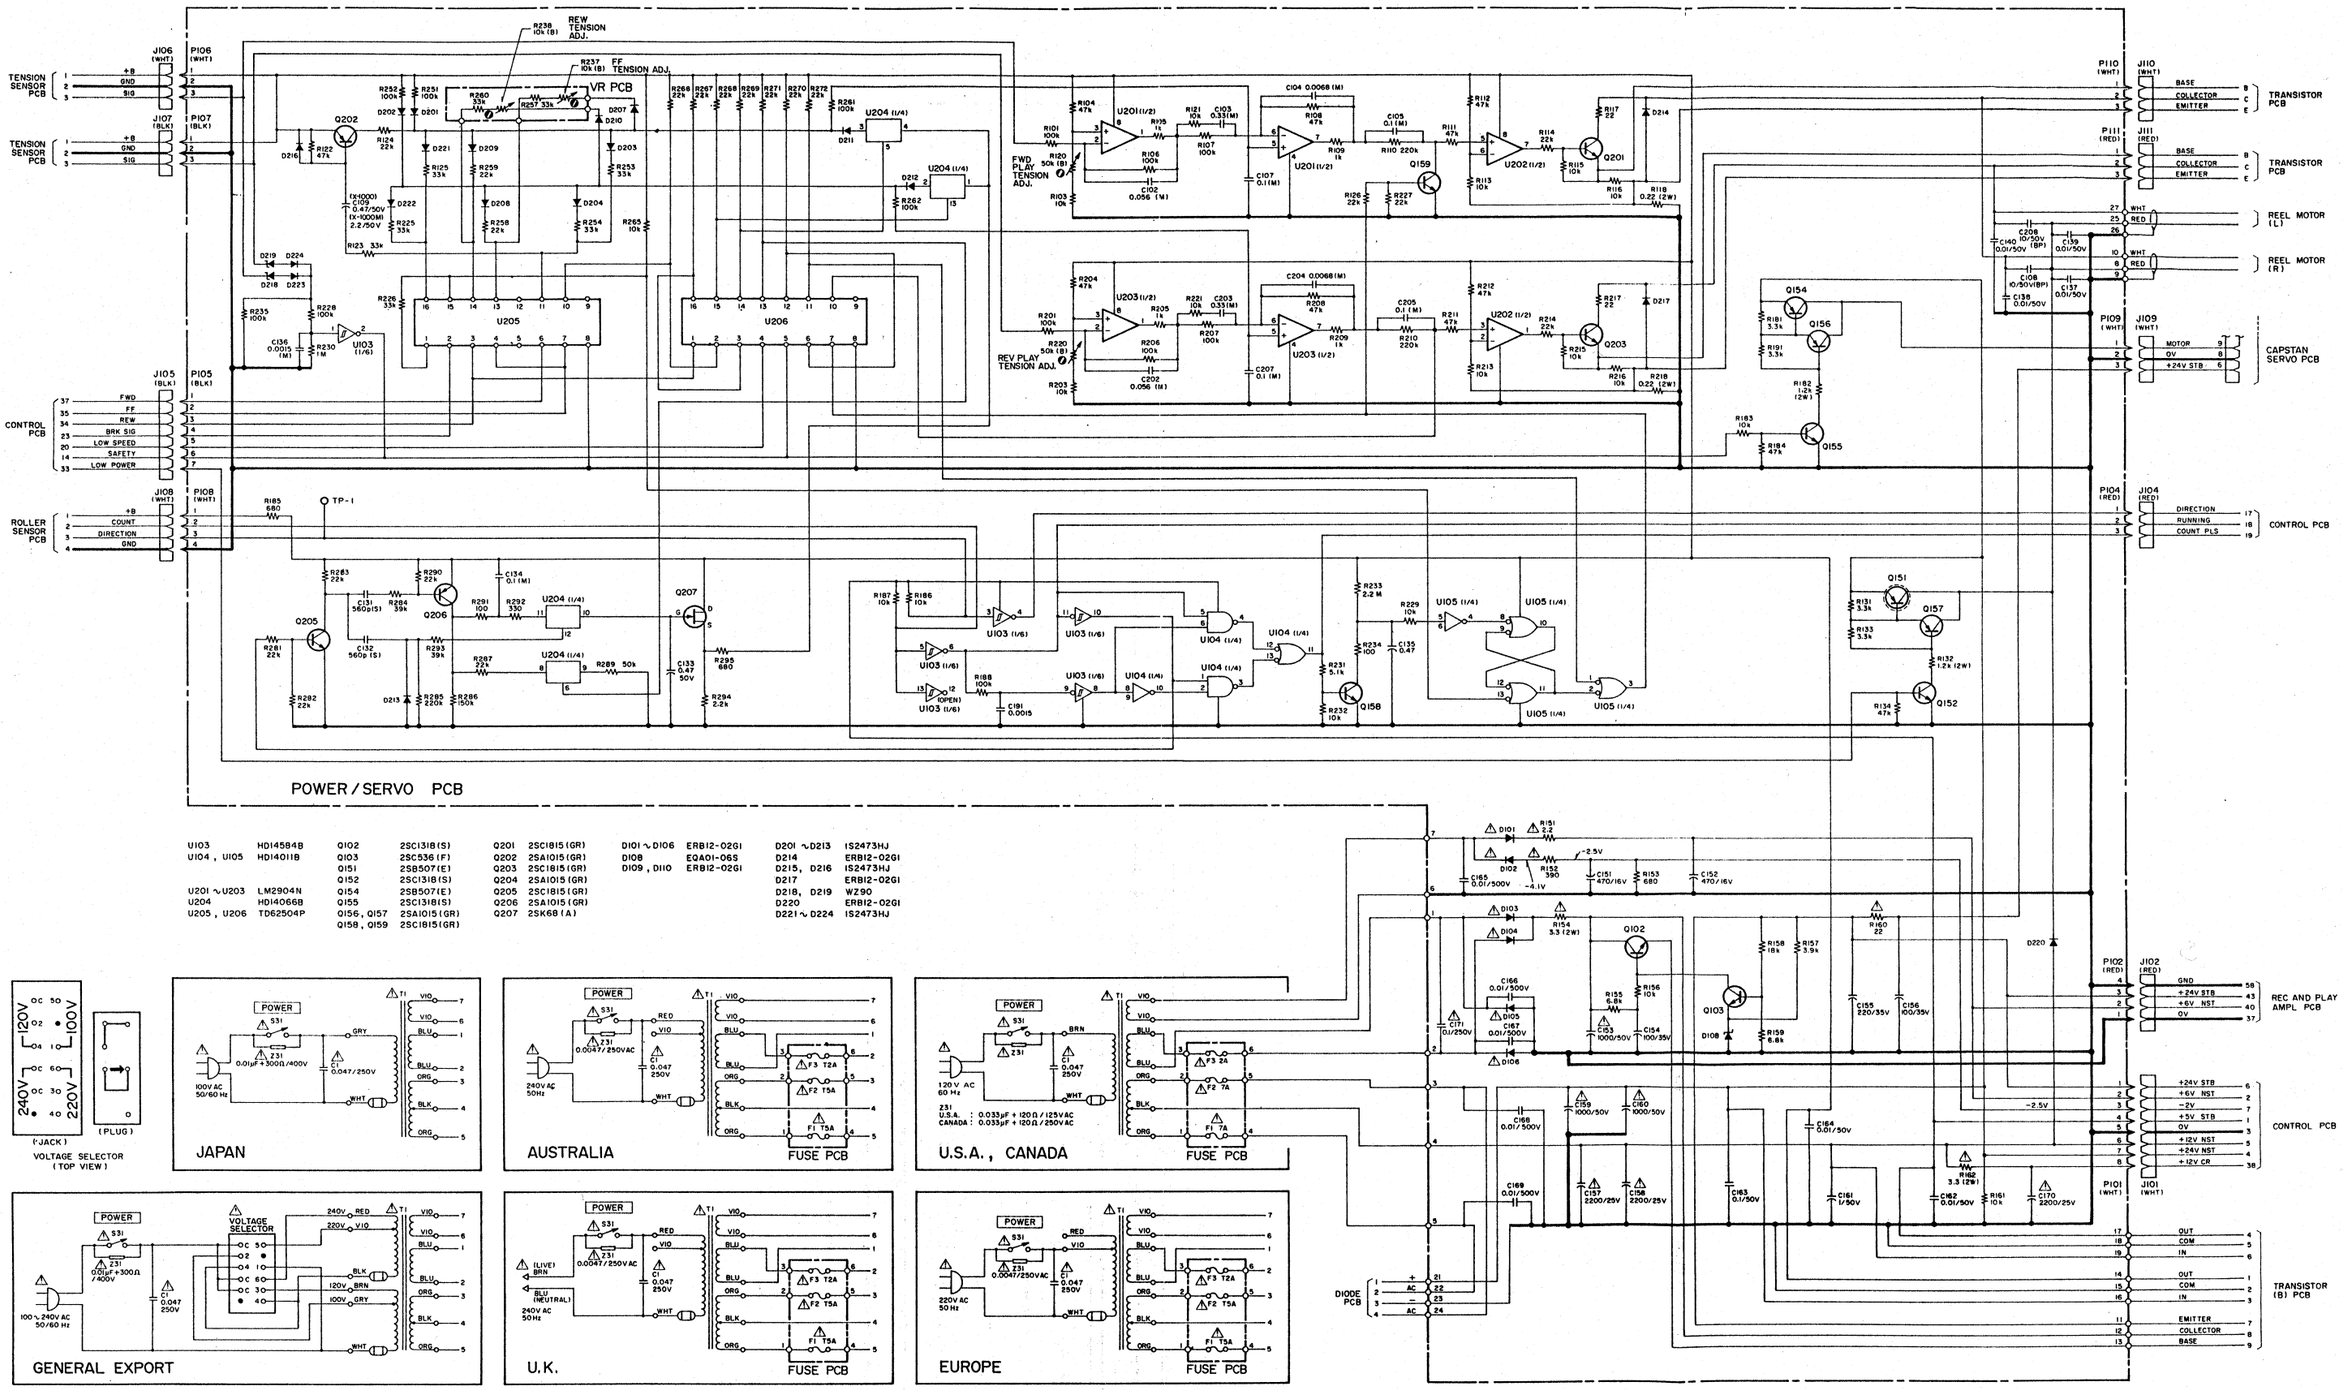

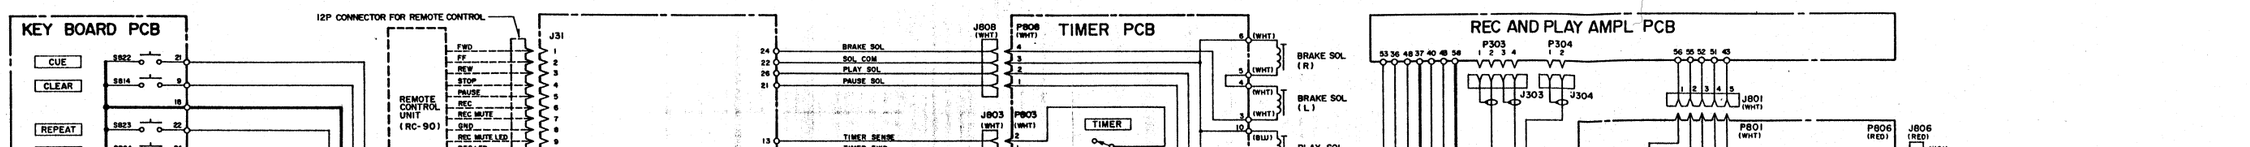

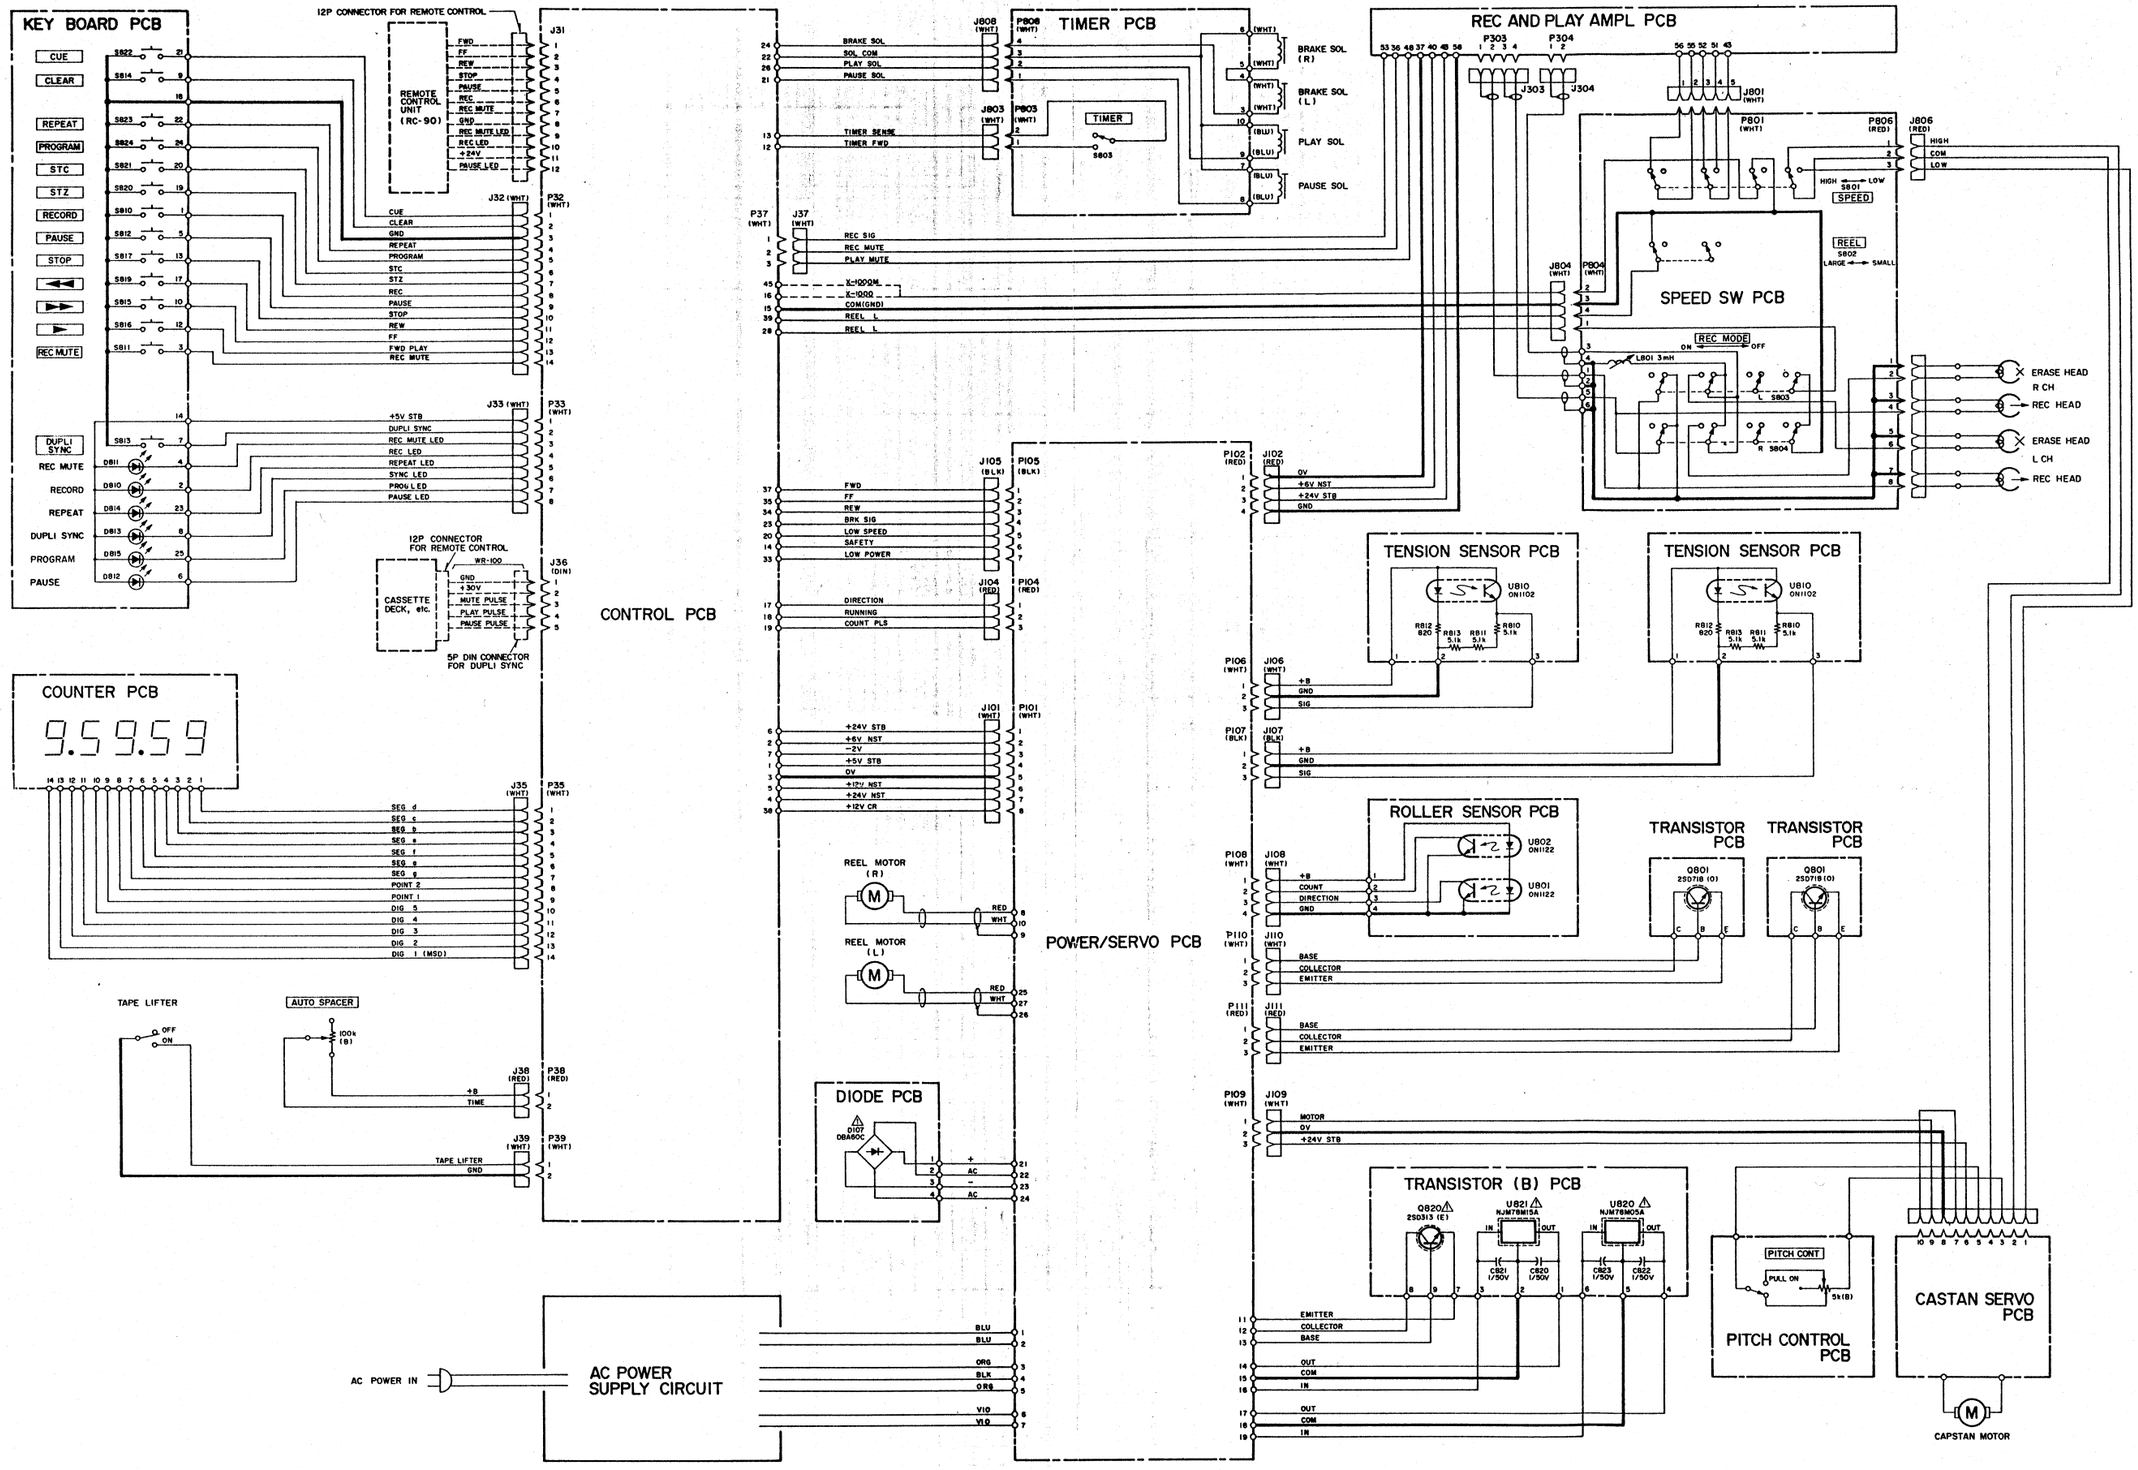
KEY BOARD PCB
CUE
CLEAR
REPEAT
PROGRAM
STC
STZ
RECORD
PAUSE
STOP
REC MUTE
DUPLI SYNC
REC MUTE
RECORD
REPEAT
DUPLI SYNC
PROGRAM
PAUSE
12P CONNECTOR FOR REMOTE CONTROL
REMOTE CONTROL UNIT (RC-90)
FWD
FF
REW
STOP
PAUSE
REC
REC MUTE
GND
REC MUTE LED
REC LED
+24V
PAUSE LED
J31
J32 (WHT)
P32 (WHT)
CUE
CLEAR
GND
REPEAT
PROGRAM
STC
STZ
REC
PAUSE
STOP
REW
FF
FWD PLAY
REC MUTE
J33 (WHT)
P33 (WHT)
+5V STB
DUPLI SYNC
REC MUTE LED
REC LED
REPEAT LED
SYNC LED
PROG LED
PAUSE LED
12P CONNECTOR FOR REMOTE CONTROL
WR-100
CASSETTE DECK, etc.
GND
+30V
MUTE PULSE
PLAY PULSE
PAUSE PULSE
J36 (DIN)
5P DIN CONNECTOR FOR DUPLI SYNC
COUNTER PCB
9.59.59
J35 (WHT)
P35 (WHT)
SEG d
SEG c
SEG b
SEG a
SEG f
SEG e
SEG g
POINT 2
POINT 1
DIG 5
DIG 4
DIG 3
DIG 2
DIG 1 (MSD)
TAPE LIFTER
OFF
ON
AUTO SPACER
100k (B)
J38 (RED)
P38 (RED)
+B
TIME
J39 (WHT)
P39 (WHT)
TAPE LIFTER
GND
CONTROL PCB
J808 (WHT)
P808 (WHT)
TIMER PCB
BRAKE SOL
SOL COM
PLAY SOL
PAUSE SOL
BRAKE SOL (R)
BRAKE SOL (L)
PLAY SOL
PAUSE SOL
J803 (WHT)
P803 (WHT)
TIMER
S803
TIMER SENSE
TIMER FWD
P37 (WHT)
J37 (WHT)
REC SIG
REC MUTE
PLAY MUTE
X-1090M
X-1090
COM(GND)
REEL L
REEL L
REC AND PLAY AMPL PCB
P303
P304
J303
J304
J801 (WHT)
P801 (WHT)
P806 (RED)
J806 (RED)
HIGH
COM
LOW
HIGH LOW
S801
SPEED
SPEED SW PCB
REEL
S802
LARGE SMALL
J804 (WHT)
P804 (WHT)
REC MODE
ON OFF
L801 3mH
L 5803
R 5804
ERASE HEAD R CH
REC HEAD
ERASE HEAD L CH
REC HEAD
J105 (BLK)
P105 (BLK)
FWD
FF
REW
BRK SIG
LOW SPEED
SAFETY
LOW POWER
J104 (RED)
P104 (RED)
DIRECTION
RUNNING
COUNT PLS
J101 (WHT)
P101 (WHT)
+24V STB
+6V NST
-2V
+5V STB
0V
+12V NST
+24V NST
+12V CR
REEL MOTOR (R)
REEL MOTOR (L)
RED
WHT
DIODE PCB
D107 DBA60C
+
AC
-
AC
POWER/SERVO PCB
P102 (RED)
J102 (RED)
0V
+6V NST
+24V STB
GND
TENSION SENSOR PCB
U810 ON1102
R812 820
R813 5.1k
R811 5.1k
R810 5.1k
TENSION SENSOR PCB
U810 ON1102
R812 820
R813 5.1k
R811 5.1k
R810 5.1k
P106 (WHT)
J106 (WHT)
P107 (BLK)
J107 (BLK)
+B
GND
SIG
ROLLER SENSOR PCB
U802 ON1122
U801 ON1122
TRANSISTOR PCB
Q801 2SD718 (O)
TRANSISTOR PCB
Q801 2SD718 (O)
P108 (WHT)
J108 (WHT)
+B
COUNT
DIRECTION
GND
P110 (WHT)
J110 (WHT)
BASE
COLLECTOR
EMITTER
P111 (RED)
J111 (RED)
BASE
COLLECTOR
EMITTER
P109 (WHT)
J109 (WHT)
MOTOR
0V
+24V STB
TRANSISTOR (B) PCB
Q820 2SD313 (E)
U821 NJM78M15A
U820 NJM78M05A
IN
OUT
C821 1/50V
C820 1/50V
C823 1/50V
C822 1/50V
EMITTER
COLLECTOR
BASE
OUT
COM
IN
OUT
COM
IN
PITCH CONT
PULL ON
5k(B)
PITCH CONTROL PCB
CASTAN SERVO PCB
CAPSTAN MOTOR
AC POWER IN
AC POWER SUPPLY CIRCUIT
BLU
BLU
ORG
BLK
ORG
VIO
VIO

TEAC®

Stereo Tape Deck

X-1000M/X-1000

Schematic Diagrams **Diagrammes schématiques** **Schematische Diagrammen** **Schematische Diagramme** **Diagramas Esquemáticos**

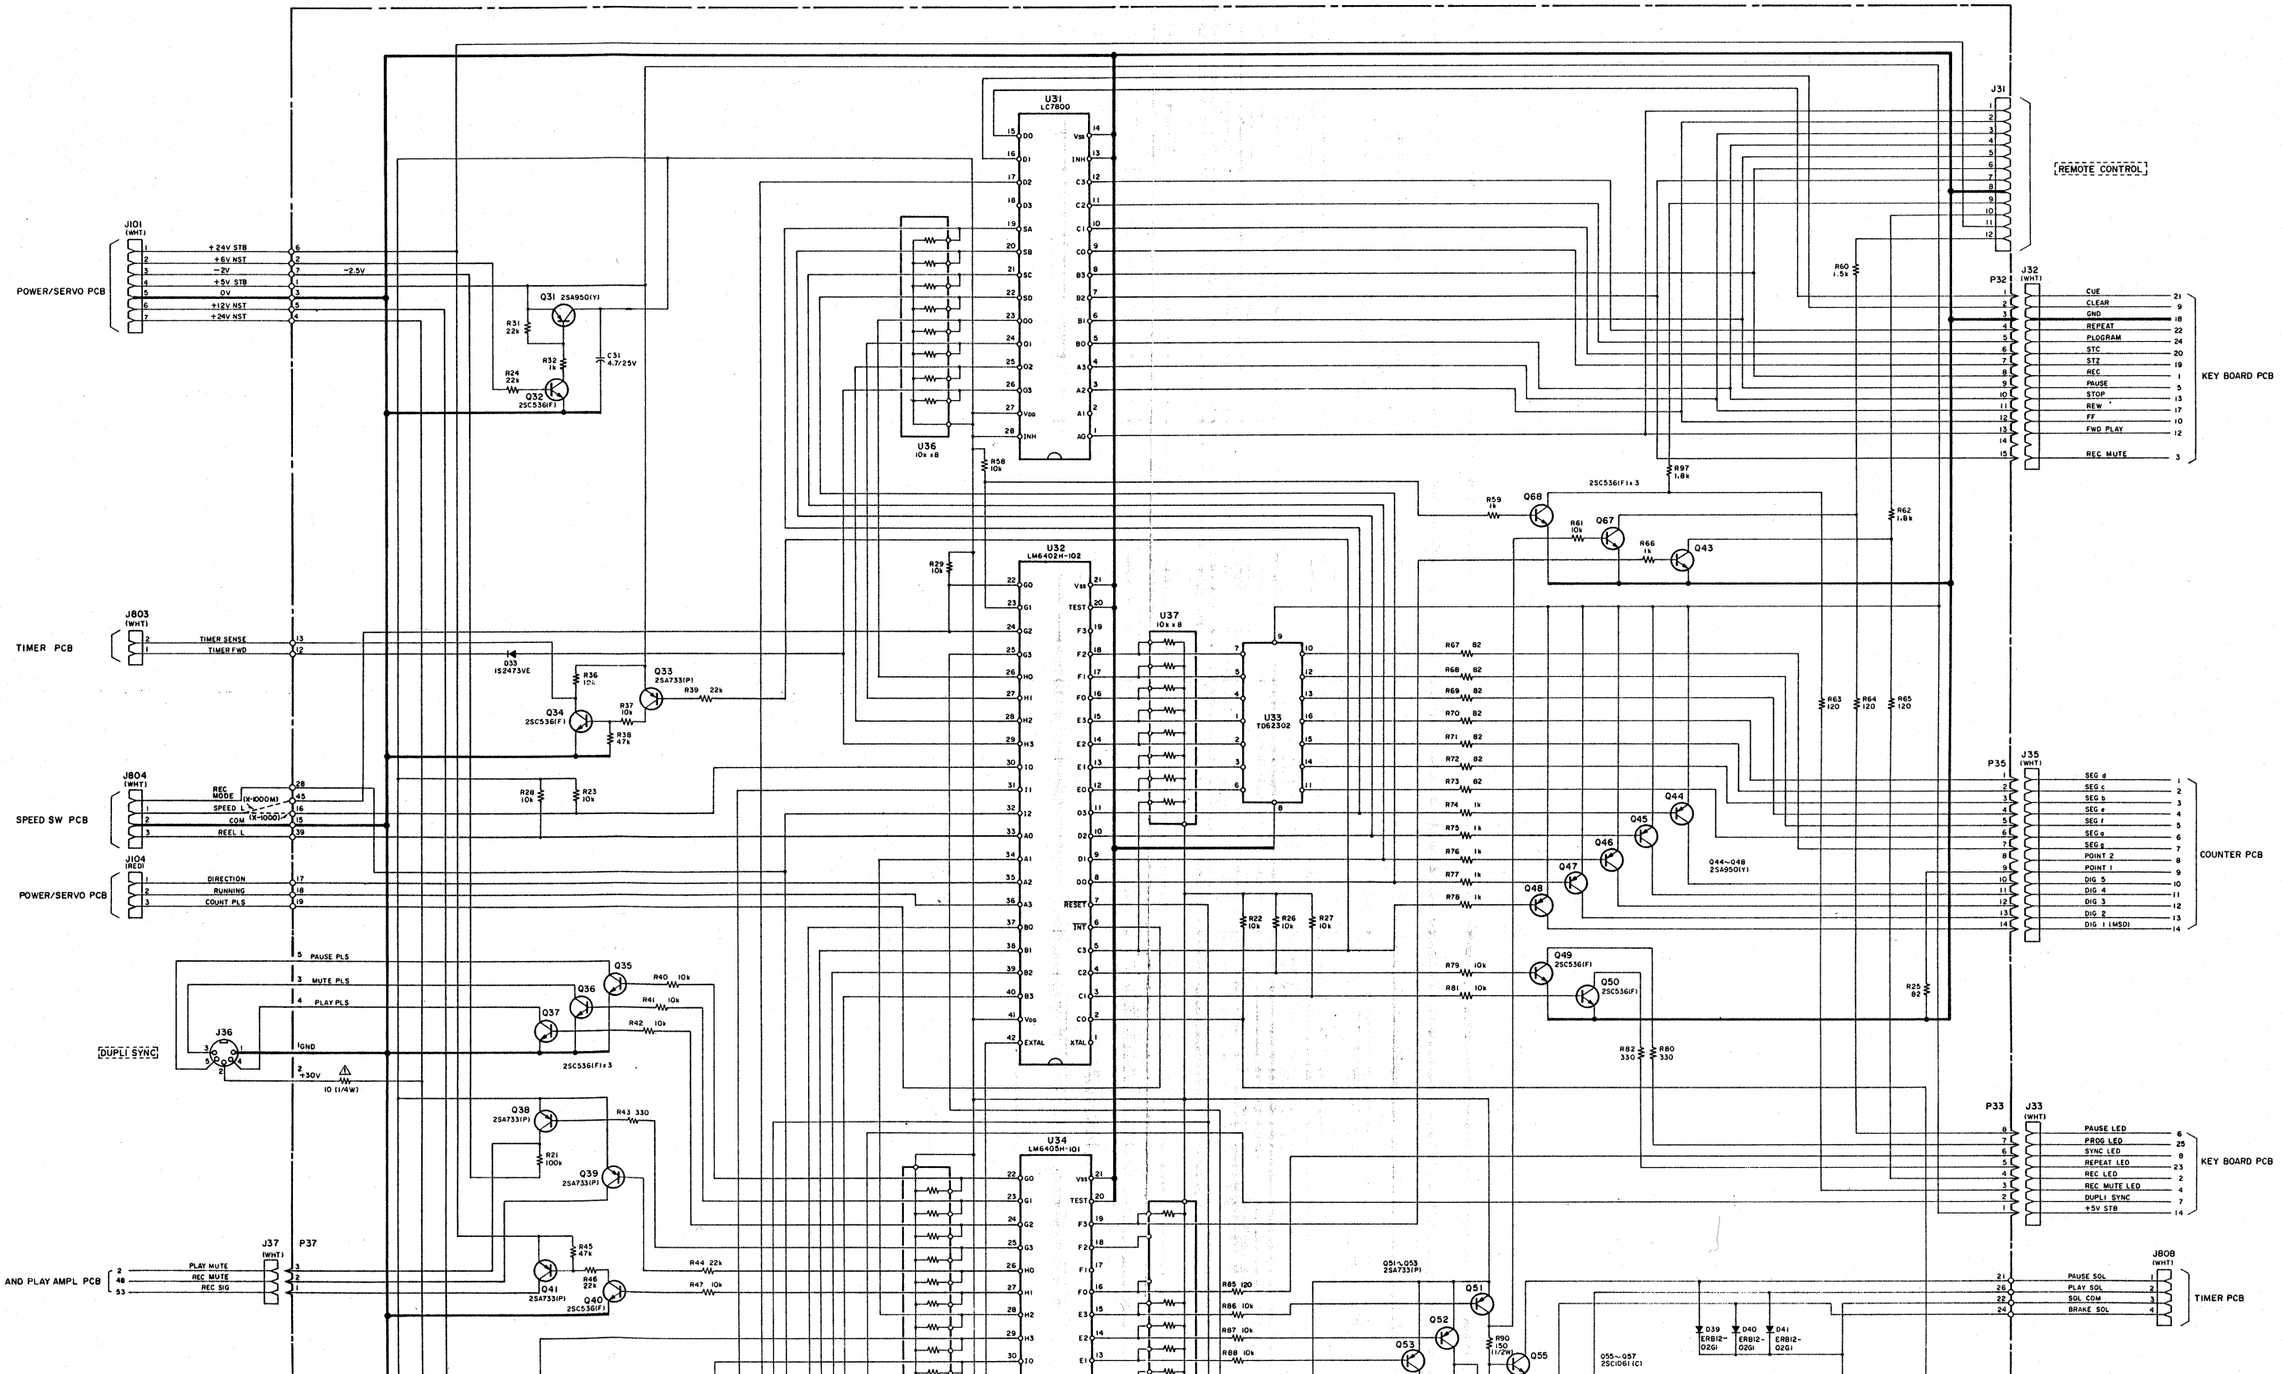

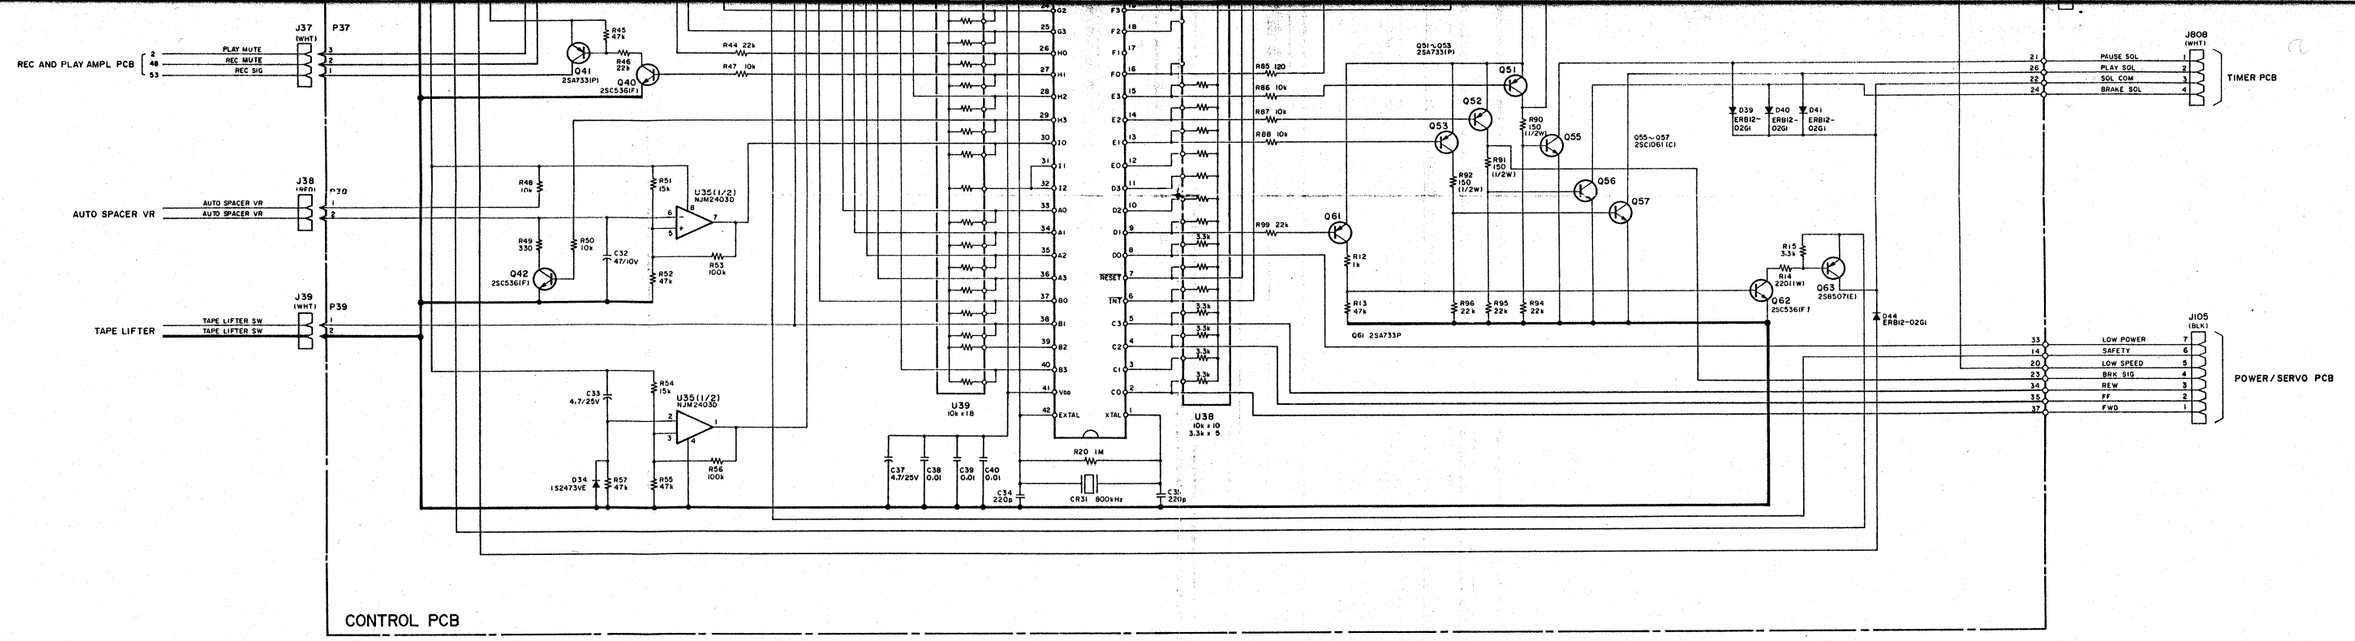

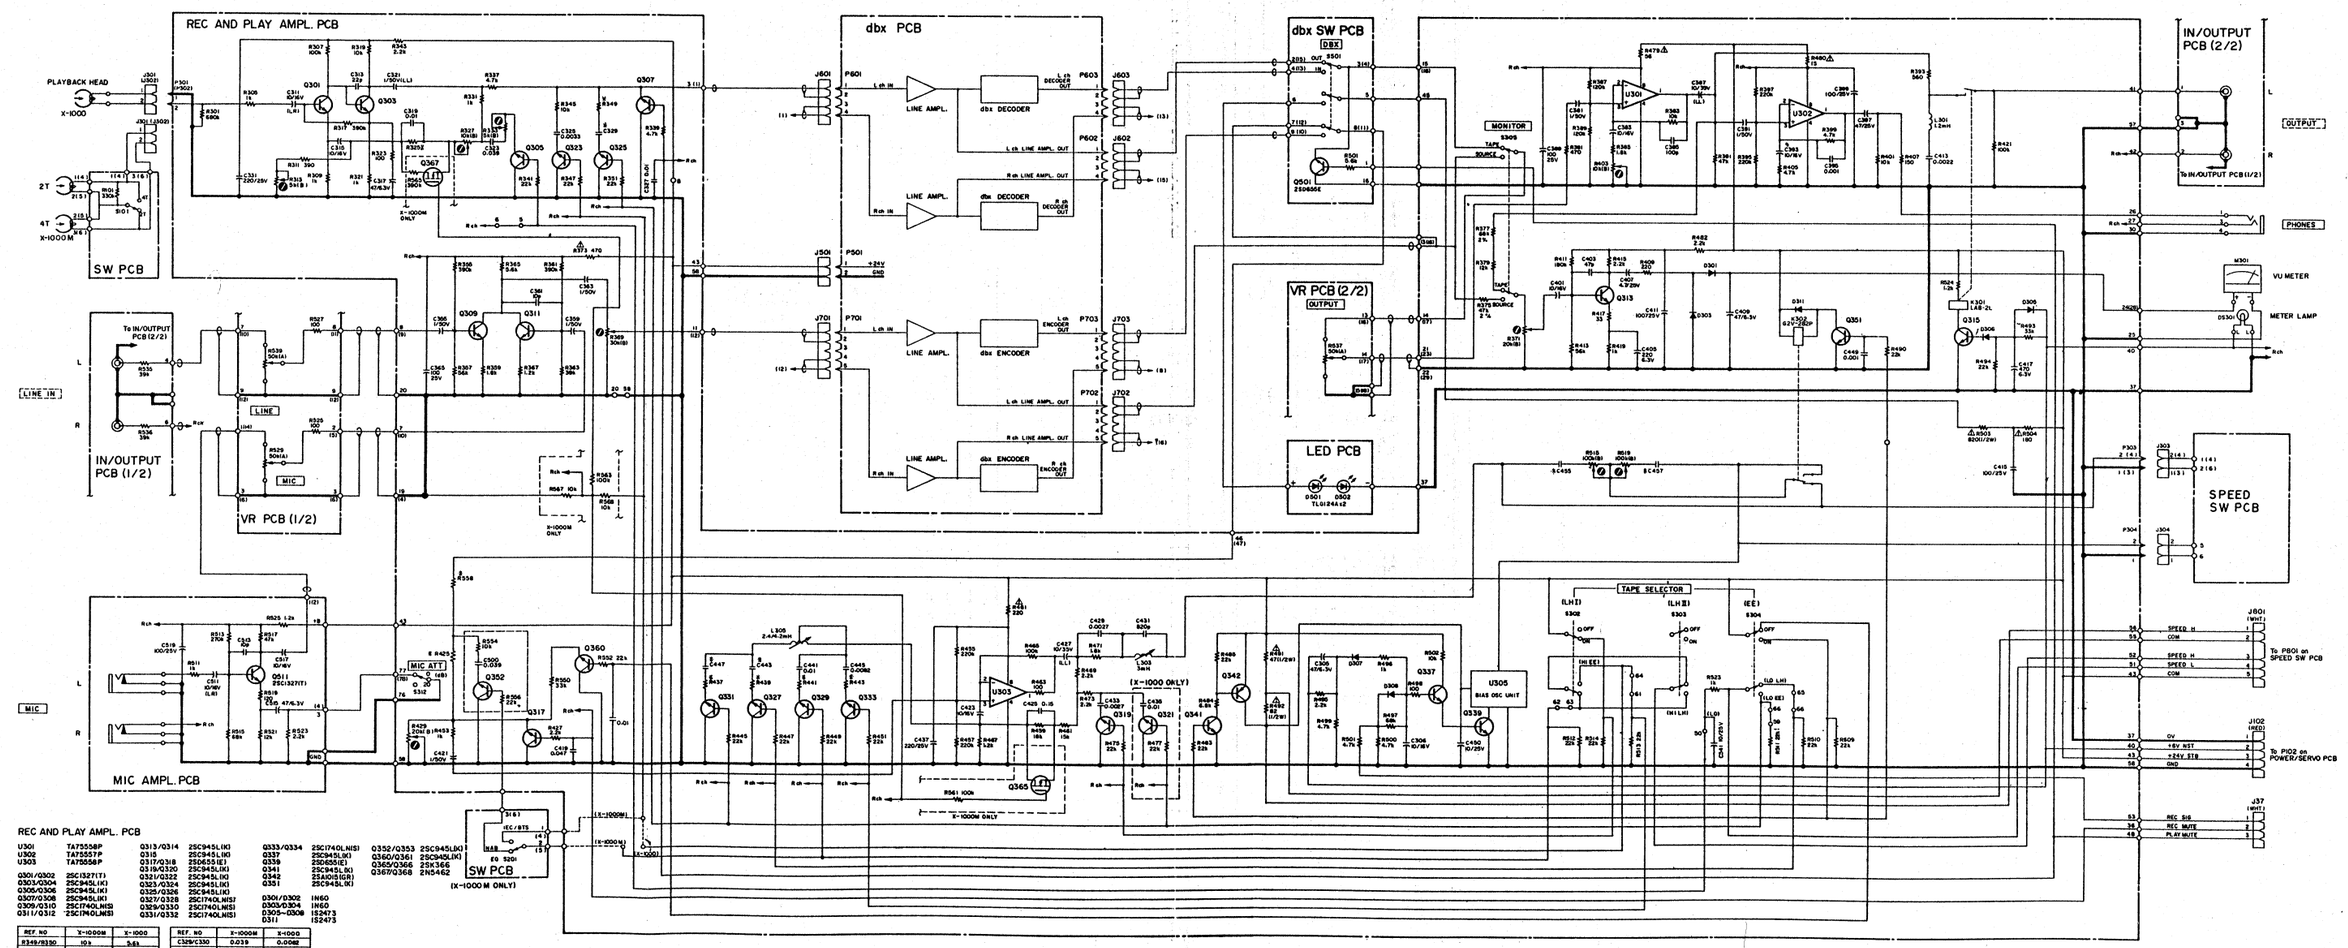

REC AND PLAY AMPL. PCB

U301	TA75558P	Q313/Q314	2SC945L(K)	Q333/Q334	2SC1740L(NIS)	Q352/Q353	2SC945L(K)
U302	TA75557P	Q315	2SC945L(K)	Q337	2SC945L(K)	Q360/Q361	2SC945L(K)
U303	TA75558P	Q317/Q318	2SD655(E)	Q339	2SD655(E)	Q365/Q366	2SK366
		Q319/Q320	2SC945L(K)	Q341	2SC945L (K)	Q367/Q368	2N5462
Q301/Q302	2SC1327(T)	Q321/Q322	2SC945L(K)	Q342	2SA1015(GR)		
Q303/Q304	2SC945L(K)	Q323/Q324	2SC945L(K)	Q351	2SC945L(K)		
Q305/Q306	2SC945L(K)	Q325/Q326	2SC945L(K)				
Q307/Q308	2SC945L(K)	Q327/Q328	2SC1740L(NIS)	D301/D302	IN60		
Q309/Q310	2SC1740L(NIS)	Q329/Q330	2SC1740L(NIS)	D303/D304	IN60		
Q311/Q312	2SC1740L(NIS)	Q331/Q332	2SC1740L(NIS)	D305~D308	IS2473		
				D311	IS2473		

REF. NO	X-1000M	X-1000
R318/R330	10k	5.6k
R425/R426	100k	120k
R437/R438	68	150
R439/R440	120	150
R441/R442	150	120
R443/R444	150	120
R558/R559	4.7k	JUMPER
R325/R326	820k	270k

REF. NO	X-1000M	X-1000
C329/C330	0.039	0.0068
C443/C444	0.012	0.015
C447/C448	0.01	0.01
C455/C456	56p	39p
C457/C458	56p	39p

TEAC®

TEAC SCEMATIC DIAGRAM X-1000M/X-1000

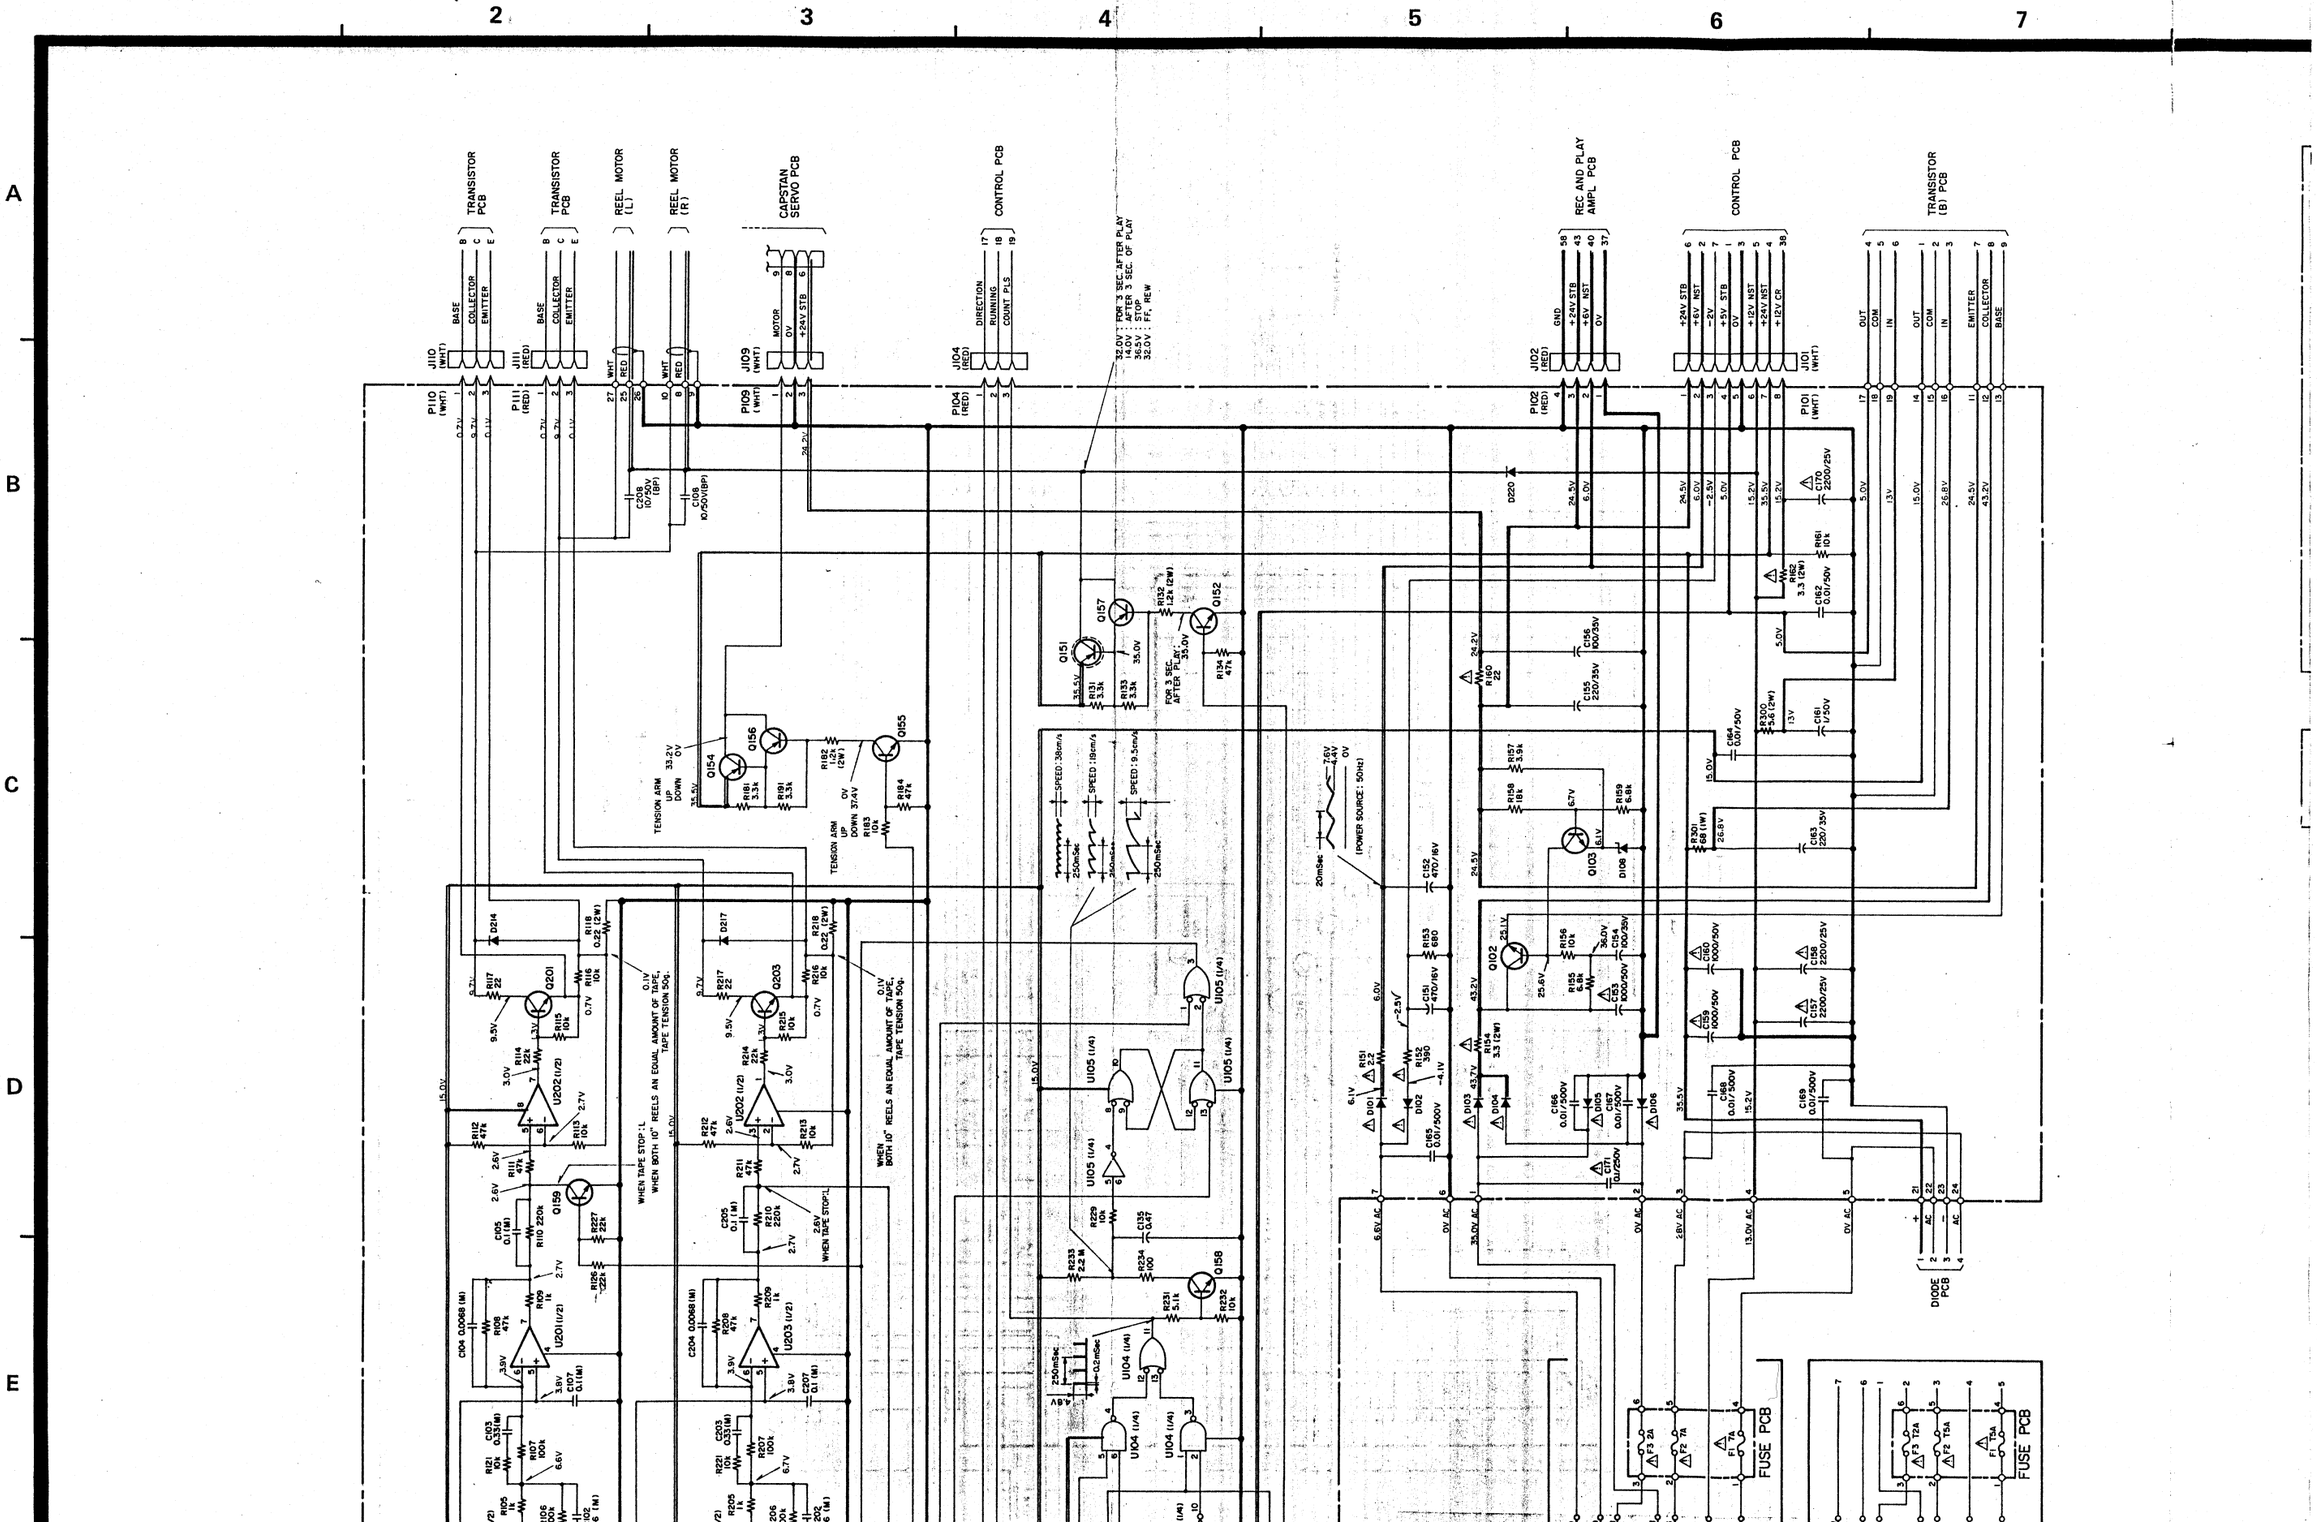

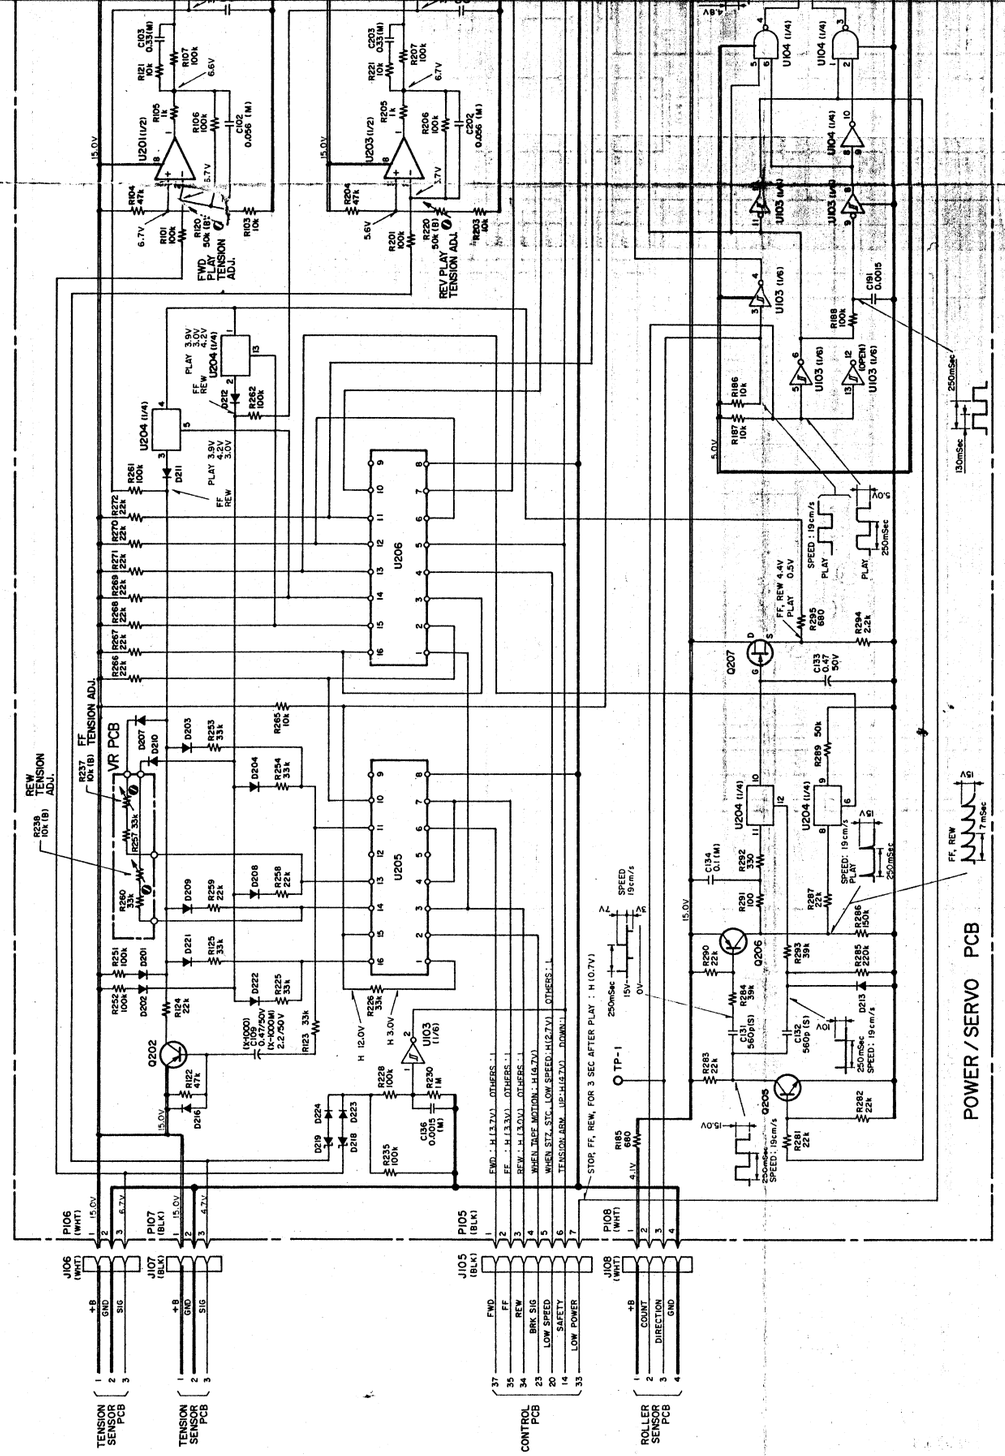

Q201	2SC1815(GR)	D101~D106	ERB12-02GI
Q202	2SA1015(GR)	D106	EQA01-06S
Q203	2SC1815(GR)	D109, D110	ERB12-02GI
Q204	2SA1015(GR)		
Q205	2SC1815(GR)		
Q206	2SA1015(GR)		
Q207	2SK68(A)		

Q201	2SC1815(GR)	D101~D106	ERB12-02GI
Q202	2SA1015(GR)	D106	EQA01-06S
Q203	2SC1815(GR)	D109, D110	ERB12-02GI
Q204	2SA1015(GR)		
Q205	2SC1815(GR)		
Q206	2SA1015(GR)		
Q207	2SK68(A)		

Q102	2SC1318(S)	D201~D213	IS2473HJ
Q103	2SC536(F)	D214	ERB12-02GI
Q151	2SB507(E)	D215, D216	IS2473HJ
Q152	2SC1318(S)	D217	ERB12-02GI
Q154	2SB507(E)	D218, D219	WZ9O
Q155	2SC1318(S)	D220	ERB12-02GI
Q156, Q157	2SA1015(GR)	D221~D224	IS2473HJ
Q158, Q159	2SC1815(GR)		

U103	HD14584B	Q102	2SC1318(S)
U104, U105	HD14011B	Q103	2SC536(F)
		Q151	2SB507(E)
		Q152	2SC1318(S)
U201~U203	LM2904N	Q154	2SB507(E)
U204	HD14066B	Q155	2SC1318(S)
U205, U206	TD62504P	Q156, Q157	2SA1015(GR)
		Q158, Q159	2SC1815(GR)

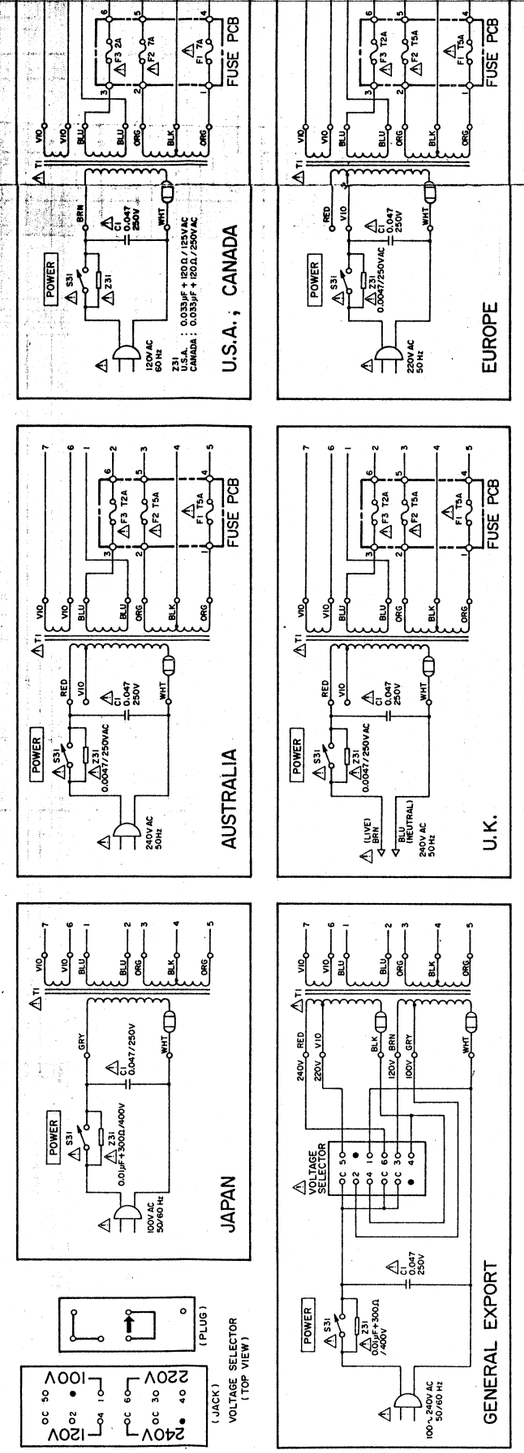

NOTES

1. Servo-Amp voltage values are reference values measured in PLAY mode at 19 cm/sec (7½ ips) and are subject to variation according to setting of sensor output.
2. Voltage values, depending on circuit section, may not always conform to indicated values during F.F./REW modes.
3. All resistors are ¼ watt, ±5%, unless marked otherwise. Resistor values are in ohms(k = 1,000 ohms).
4. All capacitor values are in microfarads (p = picofarads).
5. ⚠ Parts markedwith this sign are safety critical components. They must always be replaced with identical components-refer to the TEAC parts list and ensure exact replacement.
6. ▭ : front panel indication
7. ▭ : rear panel indication
8. ——— +B power supply circuit.

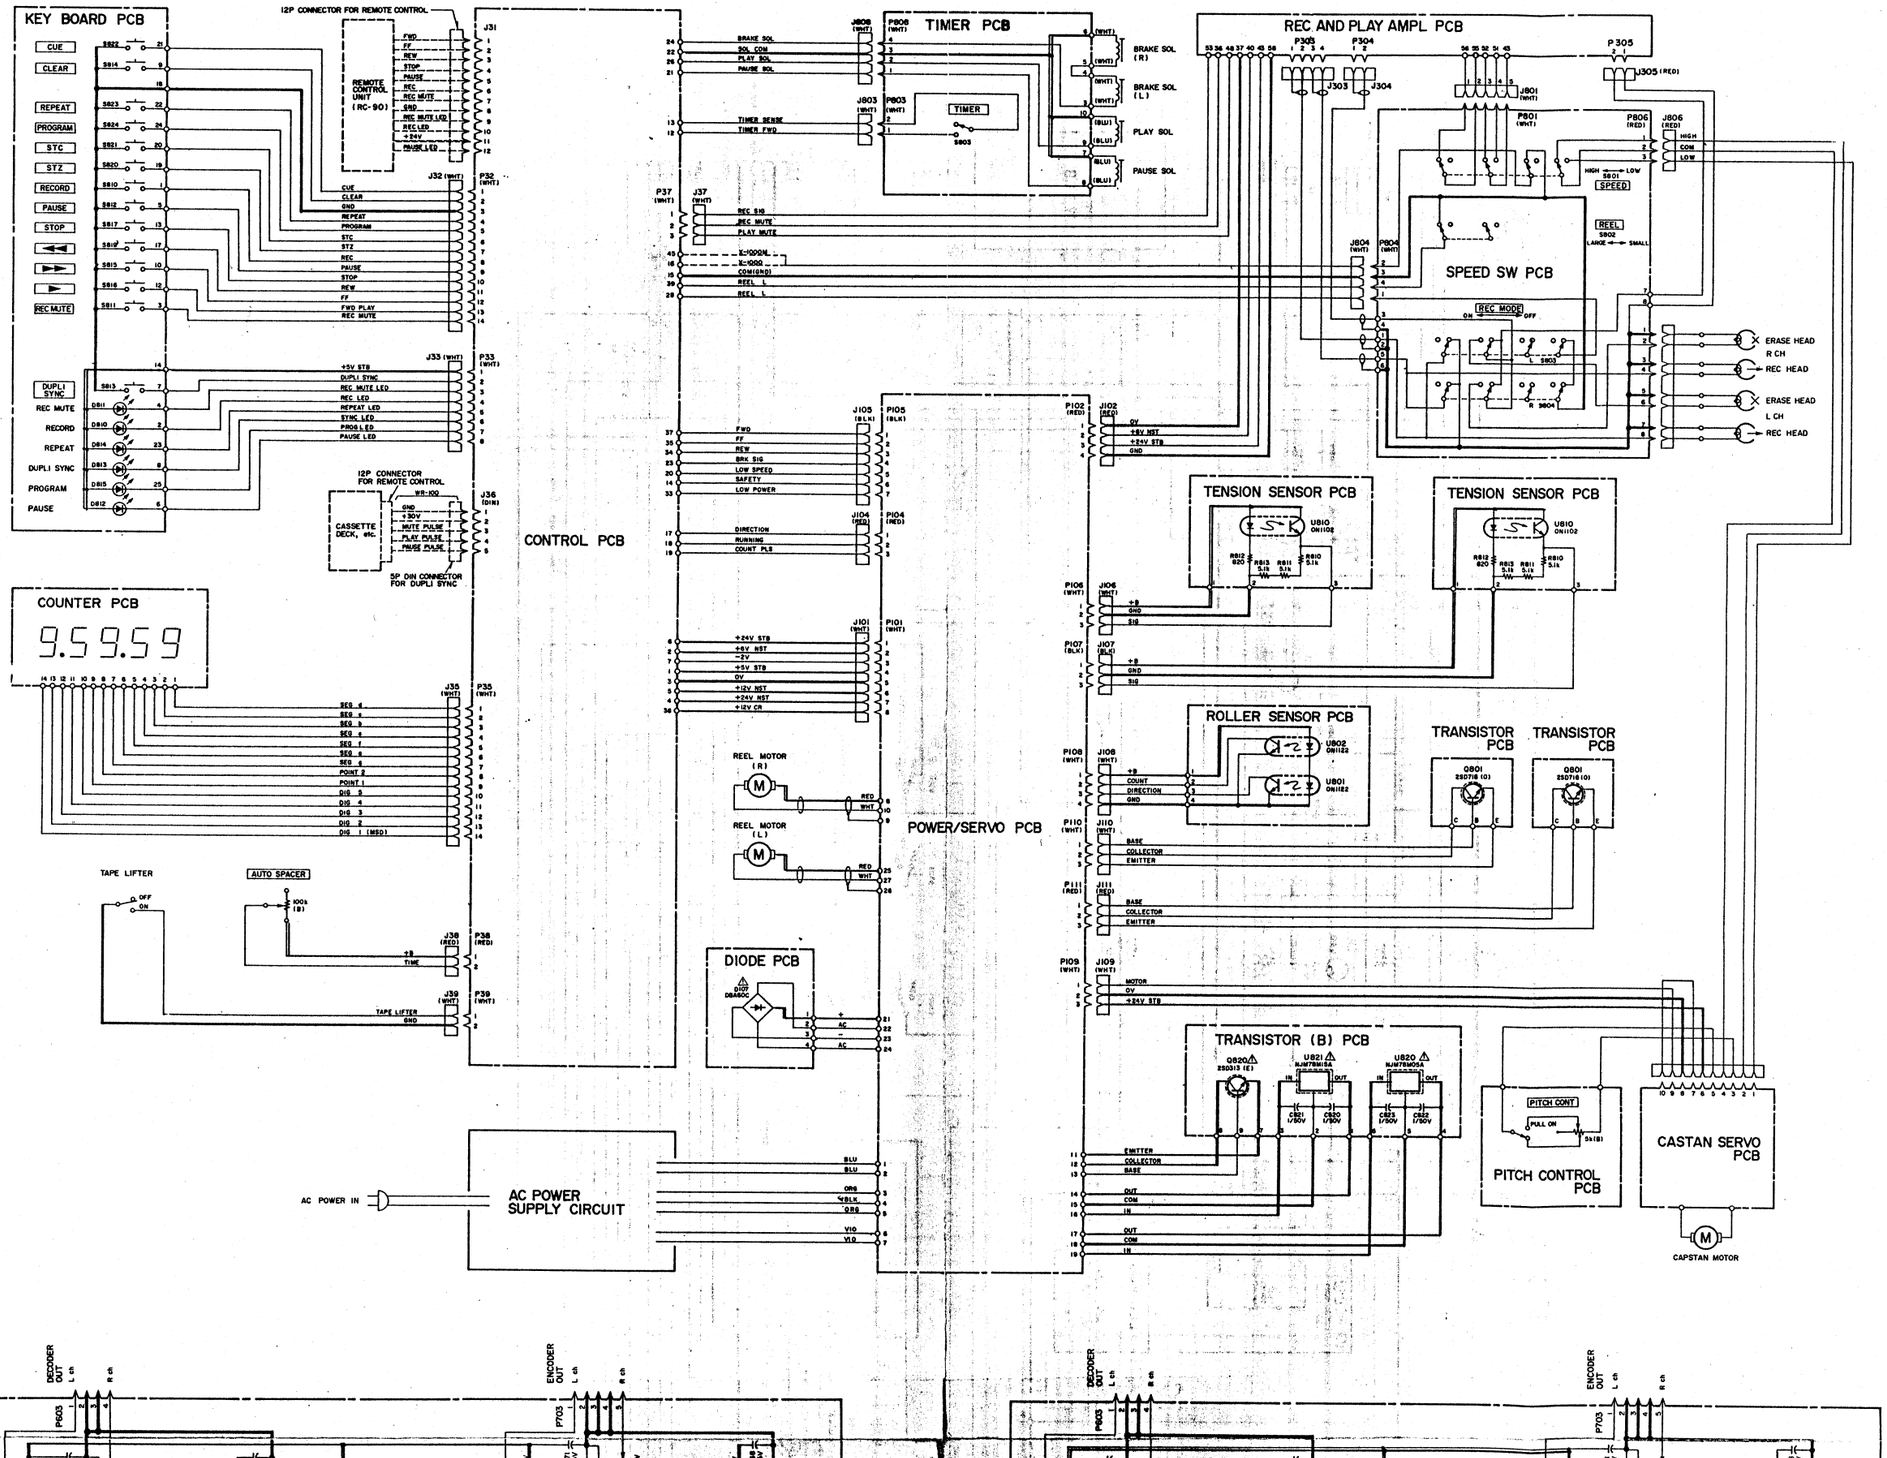
KEY BOARD PCB
CUE
CLEAR
REPEAT
PROGRAM
STC
STZ
RECORD
PAUSE
STOP
REC MUTE
DUPLI SYNC
12P CONNECTOR FOR REMOTE CONTROL
REMOTE CONTROL UNIT (RC-90)
12P CONNECTOR FOR REMOTE CONTROL
CASSETTE DECK, etc.
5P PIN CONNECTOR FOR DUPLI SYNC
COUNTER PCB
9.59.59
TAPE LIFTER
AUTO SPACER
CONTROL PCB
POWER/SERVO PCB
TIMER PCB
TIMER
BRAKE SOL (R)
BRAKE SOL (L)
PLAY SOL
PAUSE SOL
DIODE PCB
REEL MOTOR (R)
REEL MOTOR (L)
REC AND PLAY AMPL PCB
SPEED SW PCB
ERASE HEAD R CH
REC HEAD
ERASE HEAD L CH
REC HEAD
TENSION SENSOR PCB
TENSION SENSOR PCB
ROLLER SENSOR PCB
TRANSISTOR PCB
TRANSISTOR PCB
TRANSISTOR (B) PCB
PITCH CONTROL PCB
CASTAN SERVO PCB
CAPSTAN MOTOR
AC POWER IN
AC POWER SUPPLY CIRCUIT
DECODER OUT
ENCODER OUT
DECODER OUT
ENCODER OUT

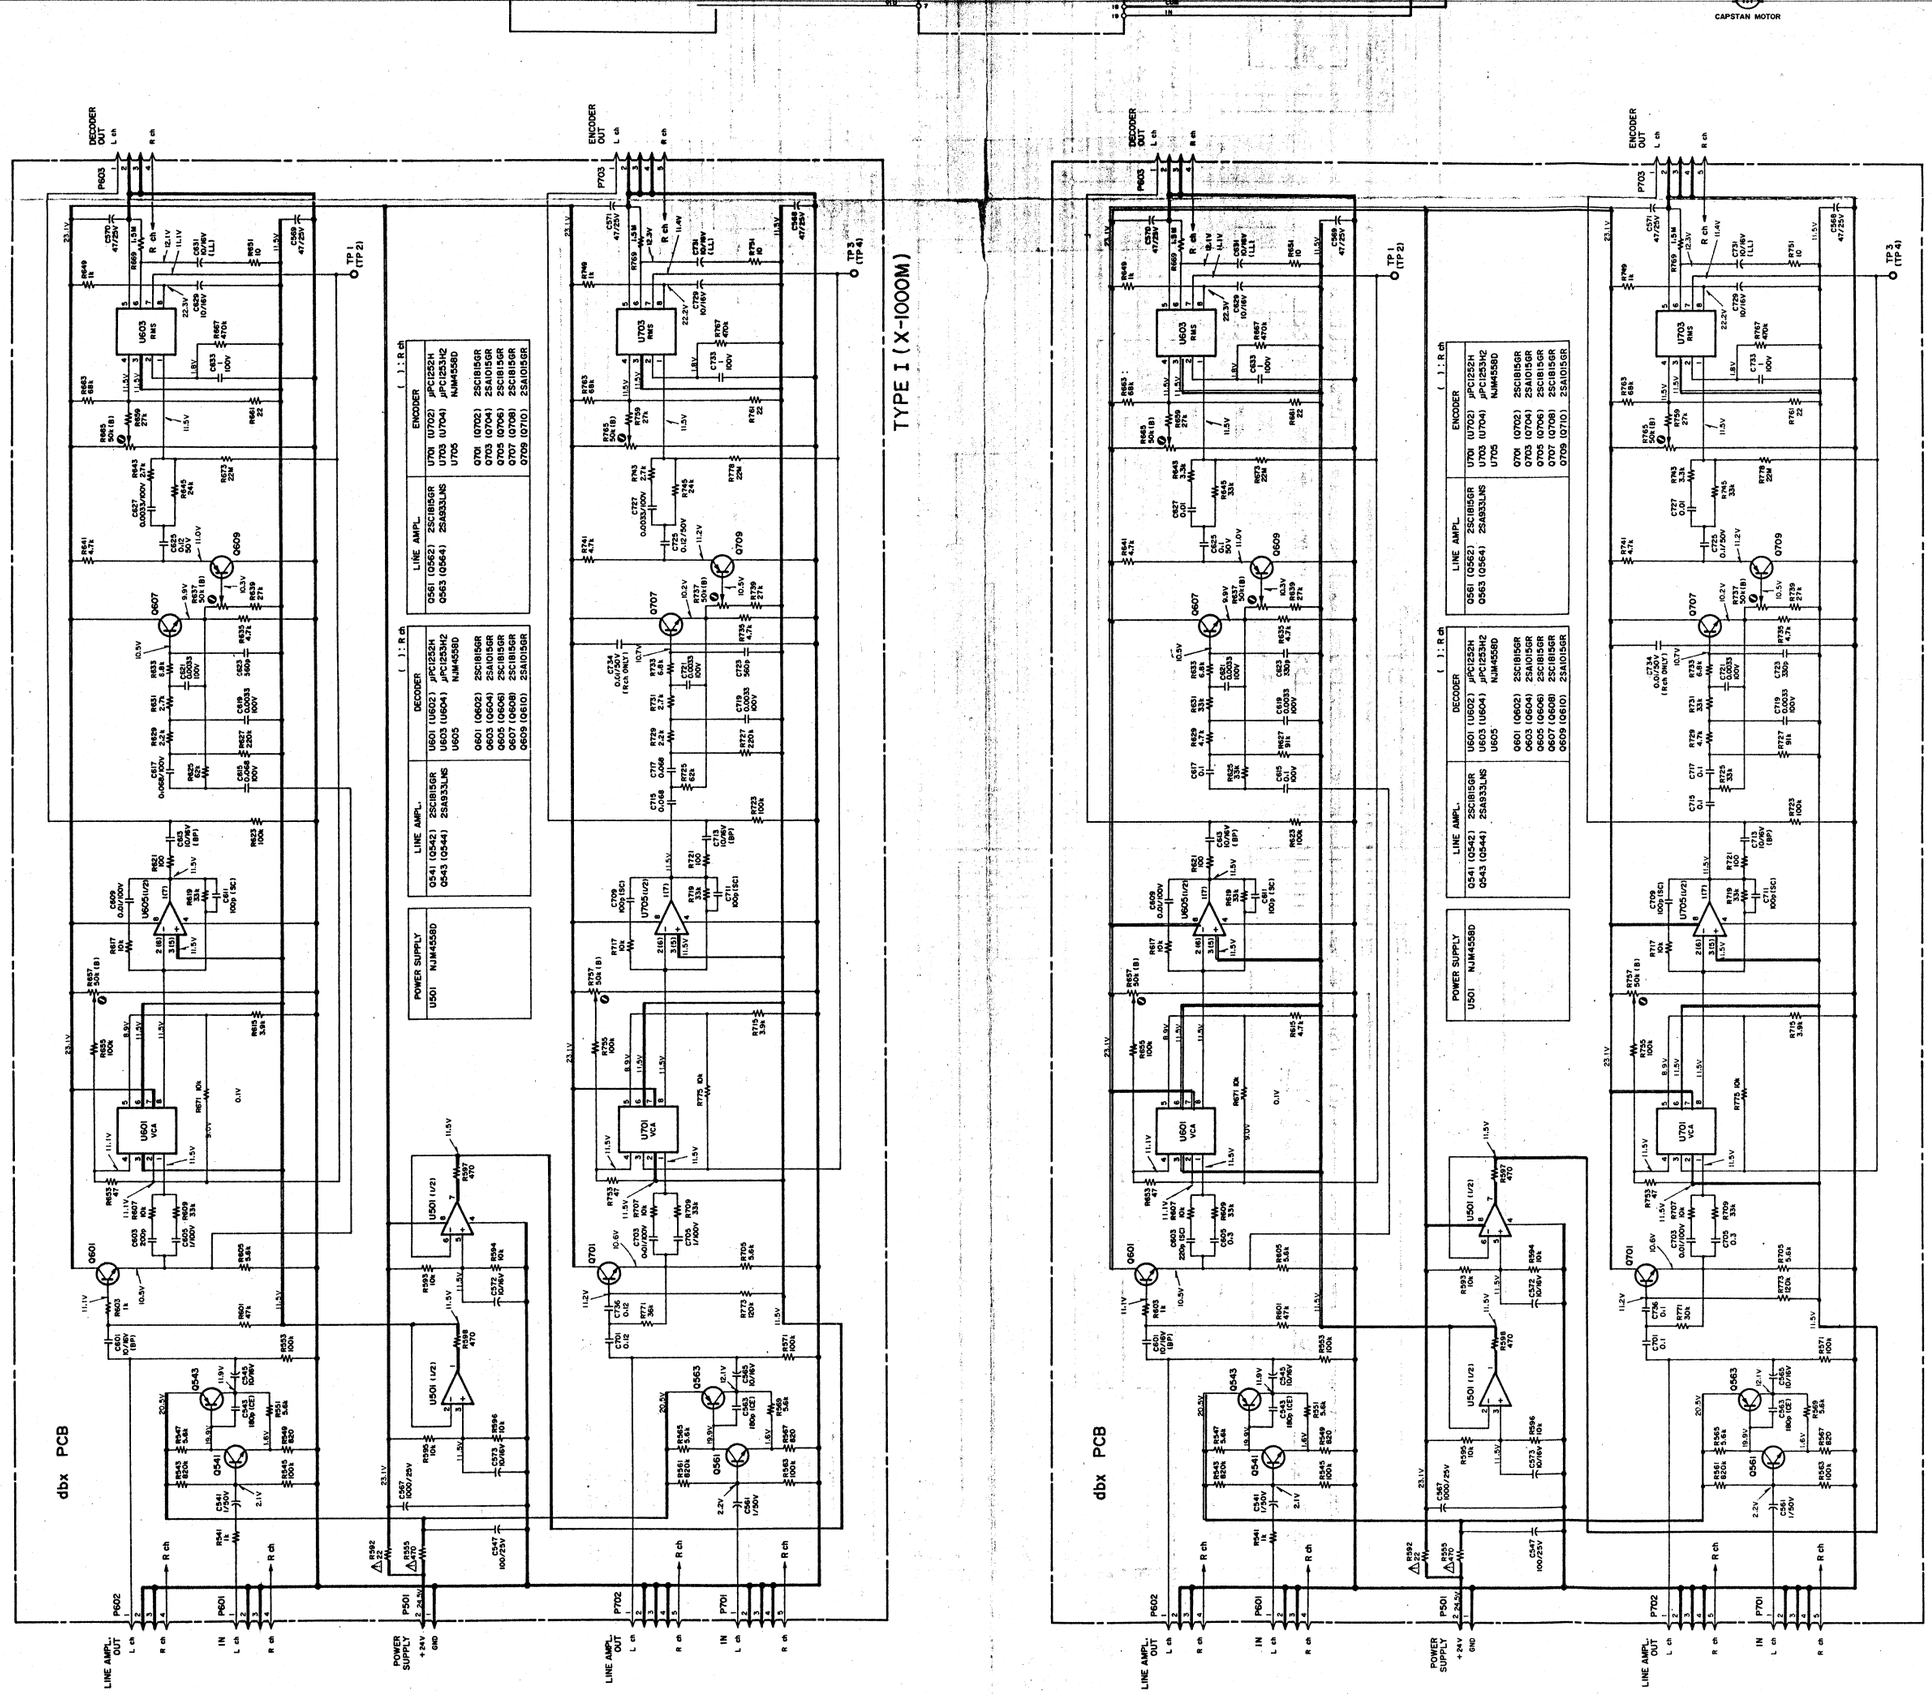

X-1000M/X-1000

Stereo Tape Deck

TEAC SCEMATIC DIAGRAM X-1000M/X-1000

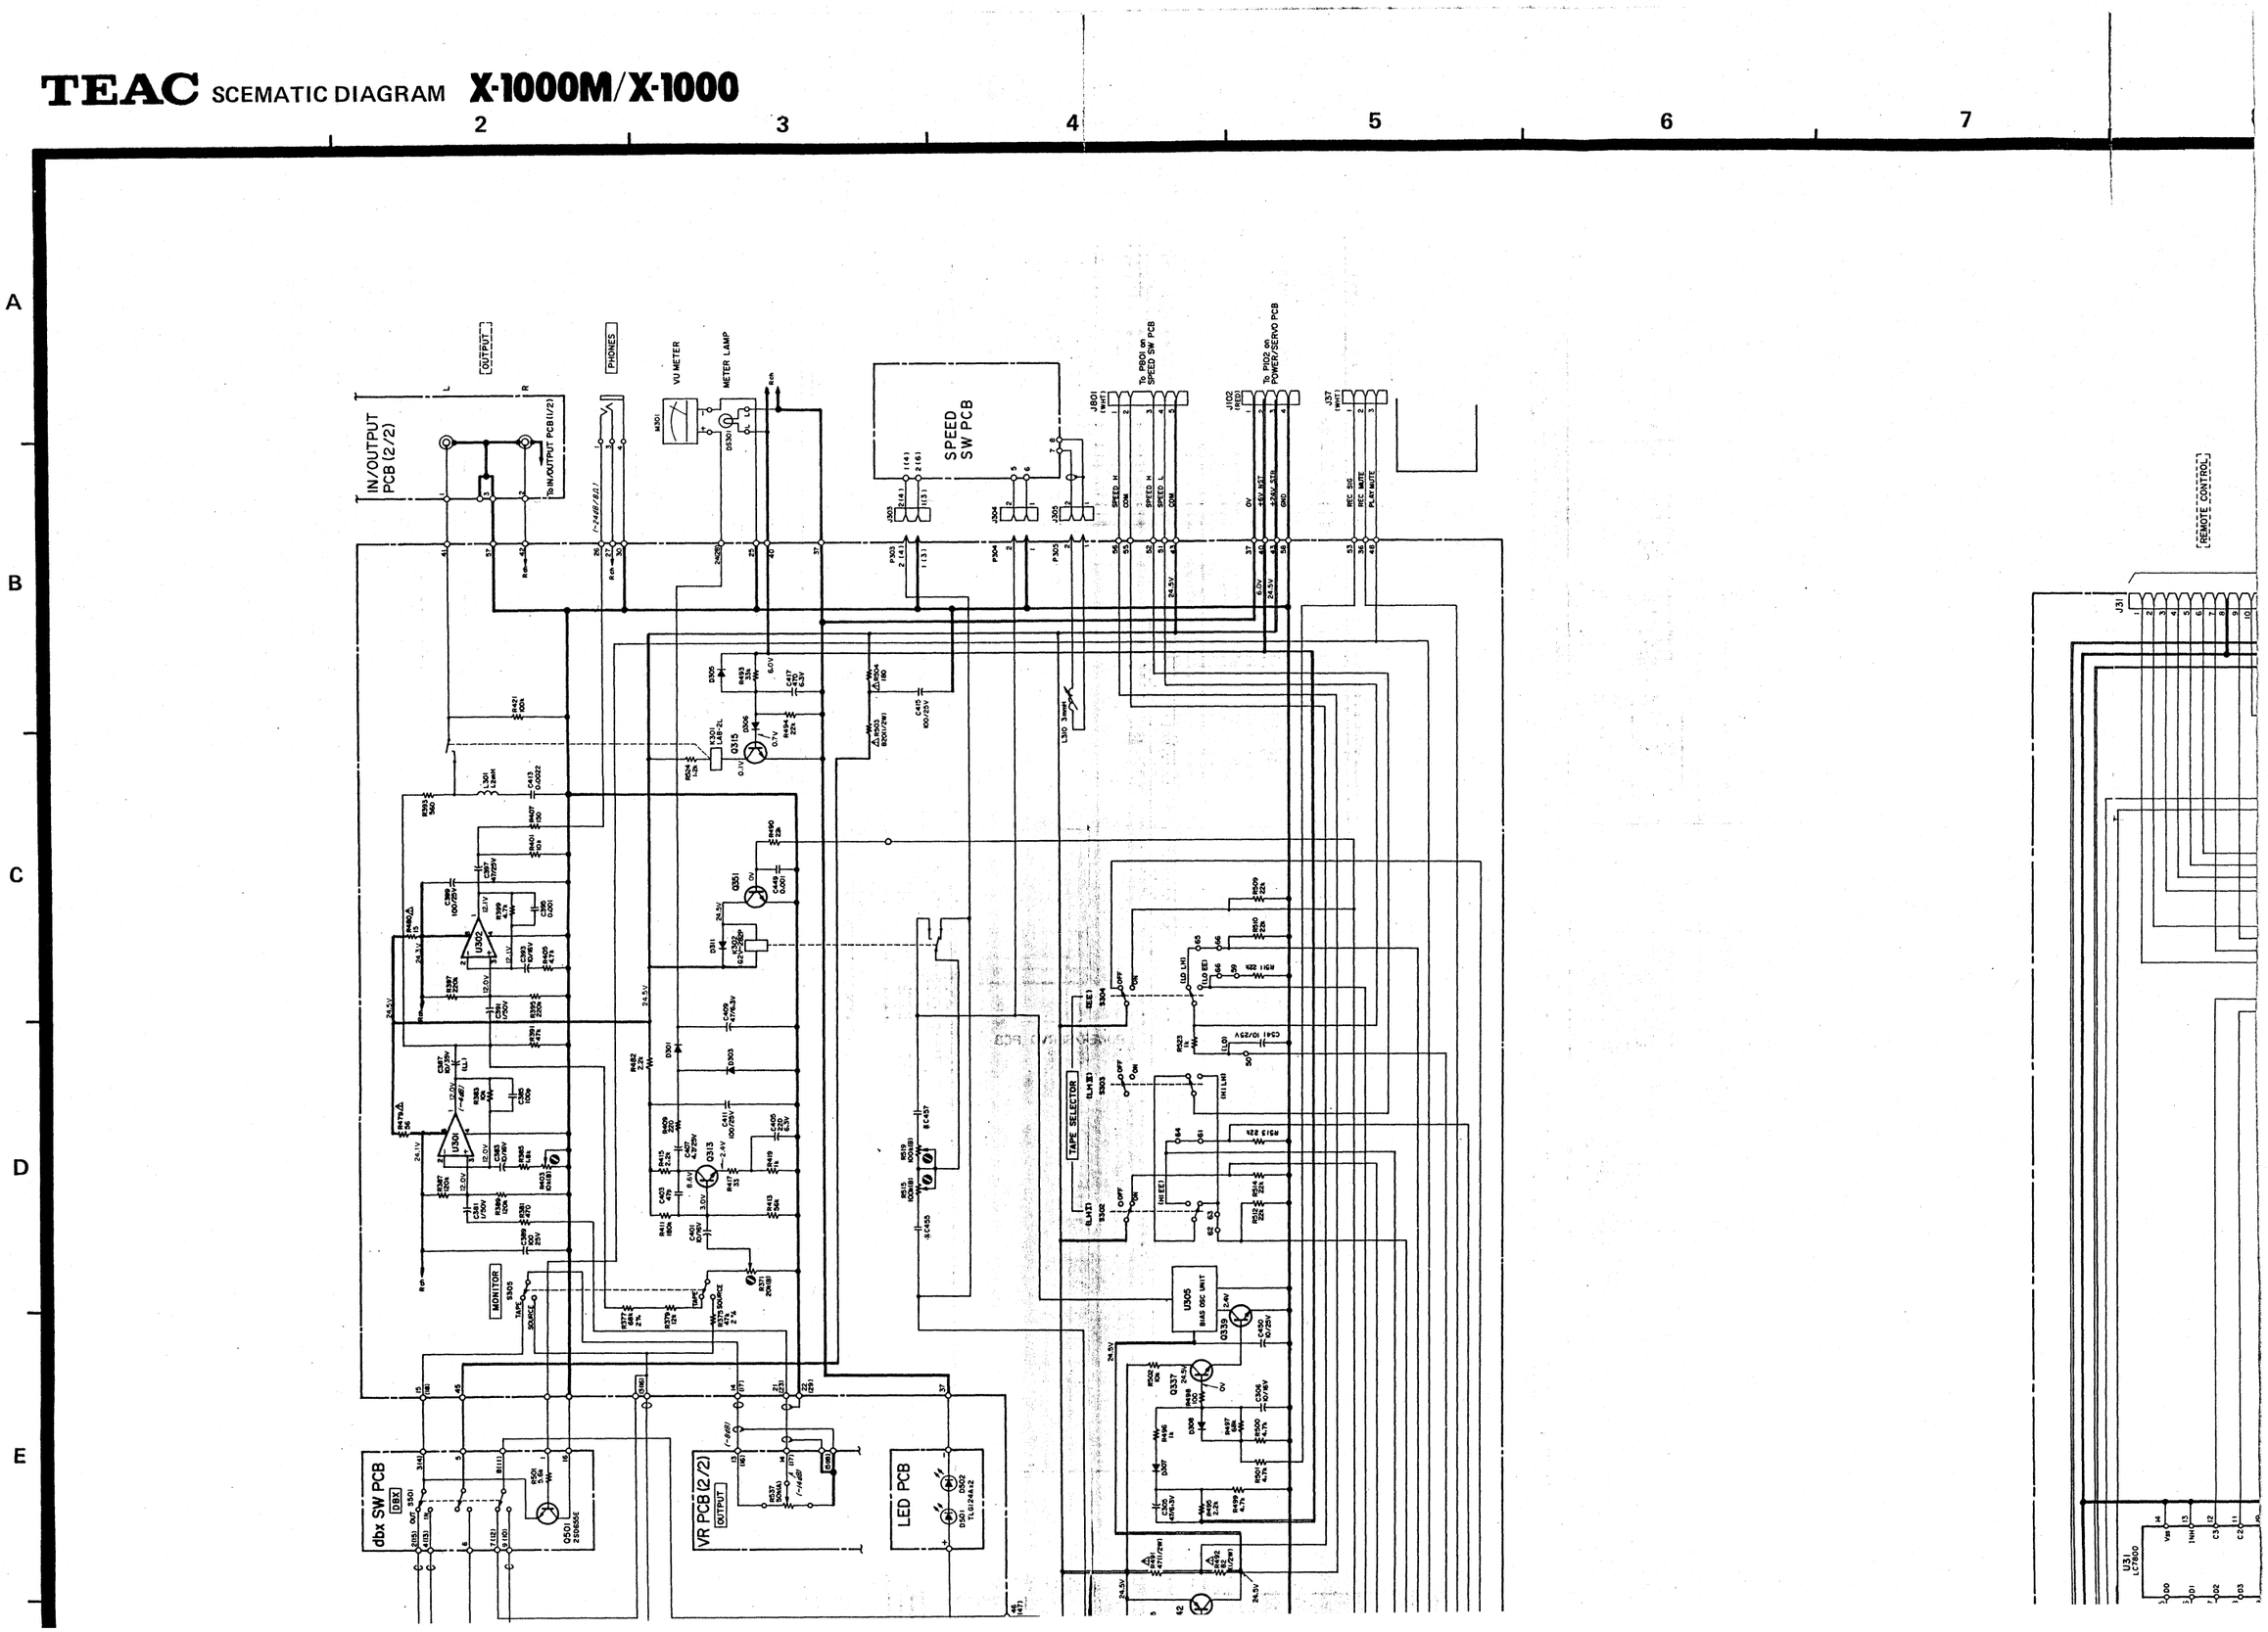

REF. NO	X-1000M	JUMPER
R2549/R2550	10k	5.6k
R2675/R2676	100k	120k
R2439/R2440	68	150
R2439/R2440	120	150
R2441/R2442	150	120
R2443/R2444	150	120
R2508/R2509	4.7k	JUMPER
R2525/R2526	820k	270k

REF. NO	X-1000M	X-1000
C529/C530	0.039	0.0082
C444/C444	0.012	0.015
C447/C448	0.01	0.01
C455/C456	56p	39p
C457/C458	56p	39p

	L303/L304	L3 - 24mH	2.4 - 4.2mH

REC AND PLAY AMPL. PCB

U301	TA7555BP	0313/0314	2SC945(L/K)	0337/0334	2SC1740(L/K/S)	0352/0353 2SC945(L/K)
U302	TA7555P	0315	2SC945(L/K)	0337	2SC945(L/K)	0360/0361 2SC945(L/K)
U303	TA7555BP	0317/0318	2SD655(E)	0339	2SD655(E)	0365/0366 2SK366
D301/302	2SC1213(T)	0321/0322	2SC945(L/K)	0342	2SJ105(GR)	0367/0368 2N5462
D303/304	2SC945(L/K)	0323/0324	2SC945(L/K)	0351	2SC945(L/K)	
D305/306	2SC945(L/K)	0325/0326	2SC945(L/K)			
D307/308	2SC945(L/K)	0327/0328	2SC1740(L/K/S)	D301/302	1N60	
D309/310	2SC1740(L/K/S)	0329/0330	2SC1740(L/K/S)	D303/304	1N60	
D311/312	2SC1740(L/K/S)	0331/0332	2SC1740(L/K/S)	D305-D308	1S2473	
				D311	1S2473	

REC AND PLAY AMPL. PCB

MIC AMPL. PCB

SW PCB

LINE IN

IN/OUTPUT PCB (1/2)

To IN/OUTPUT PCB (2/2)

VR PCB (1/2)

LINE

MIC

MIC ATT

PLAYBACK HEAD

X-1000

X-1000M

X-1000M ONLY

X-1000 ONLY

dbx PCB

dbx ENCODER

dbx DECODER

LINE AMPL.

LED PCB

dbx SW PCB

VR PCB (2/2)

OUTPUT

LC7800

U31

J101

J301

J501

J601

J701

J702

J703

J602

J603

P501

P601

P701

P702

P703

P602

P603

REC AND PLAY AMPL. PCB

dbx PCB

SW PCB

LED PCB

VR PCB (2/2)

dbx SW PCB

MIC

LINE IN

PLAYBACK HEAD

X-1000

X-1000M

X-1000M ONLY

X-1000 ONLY

dbx ENCODER

dbx DECODER

LINE AMPL.

8 9 10 11 12 13 14

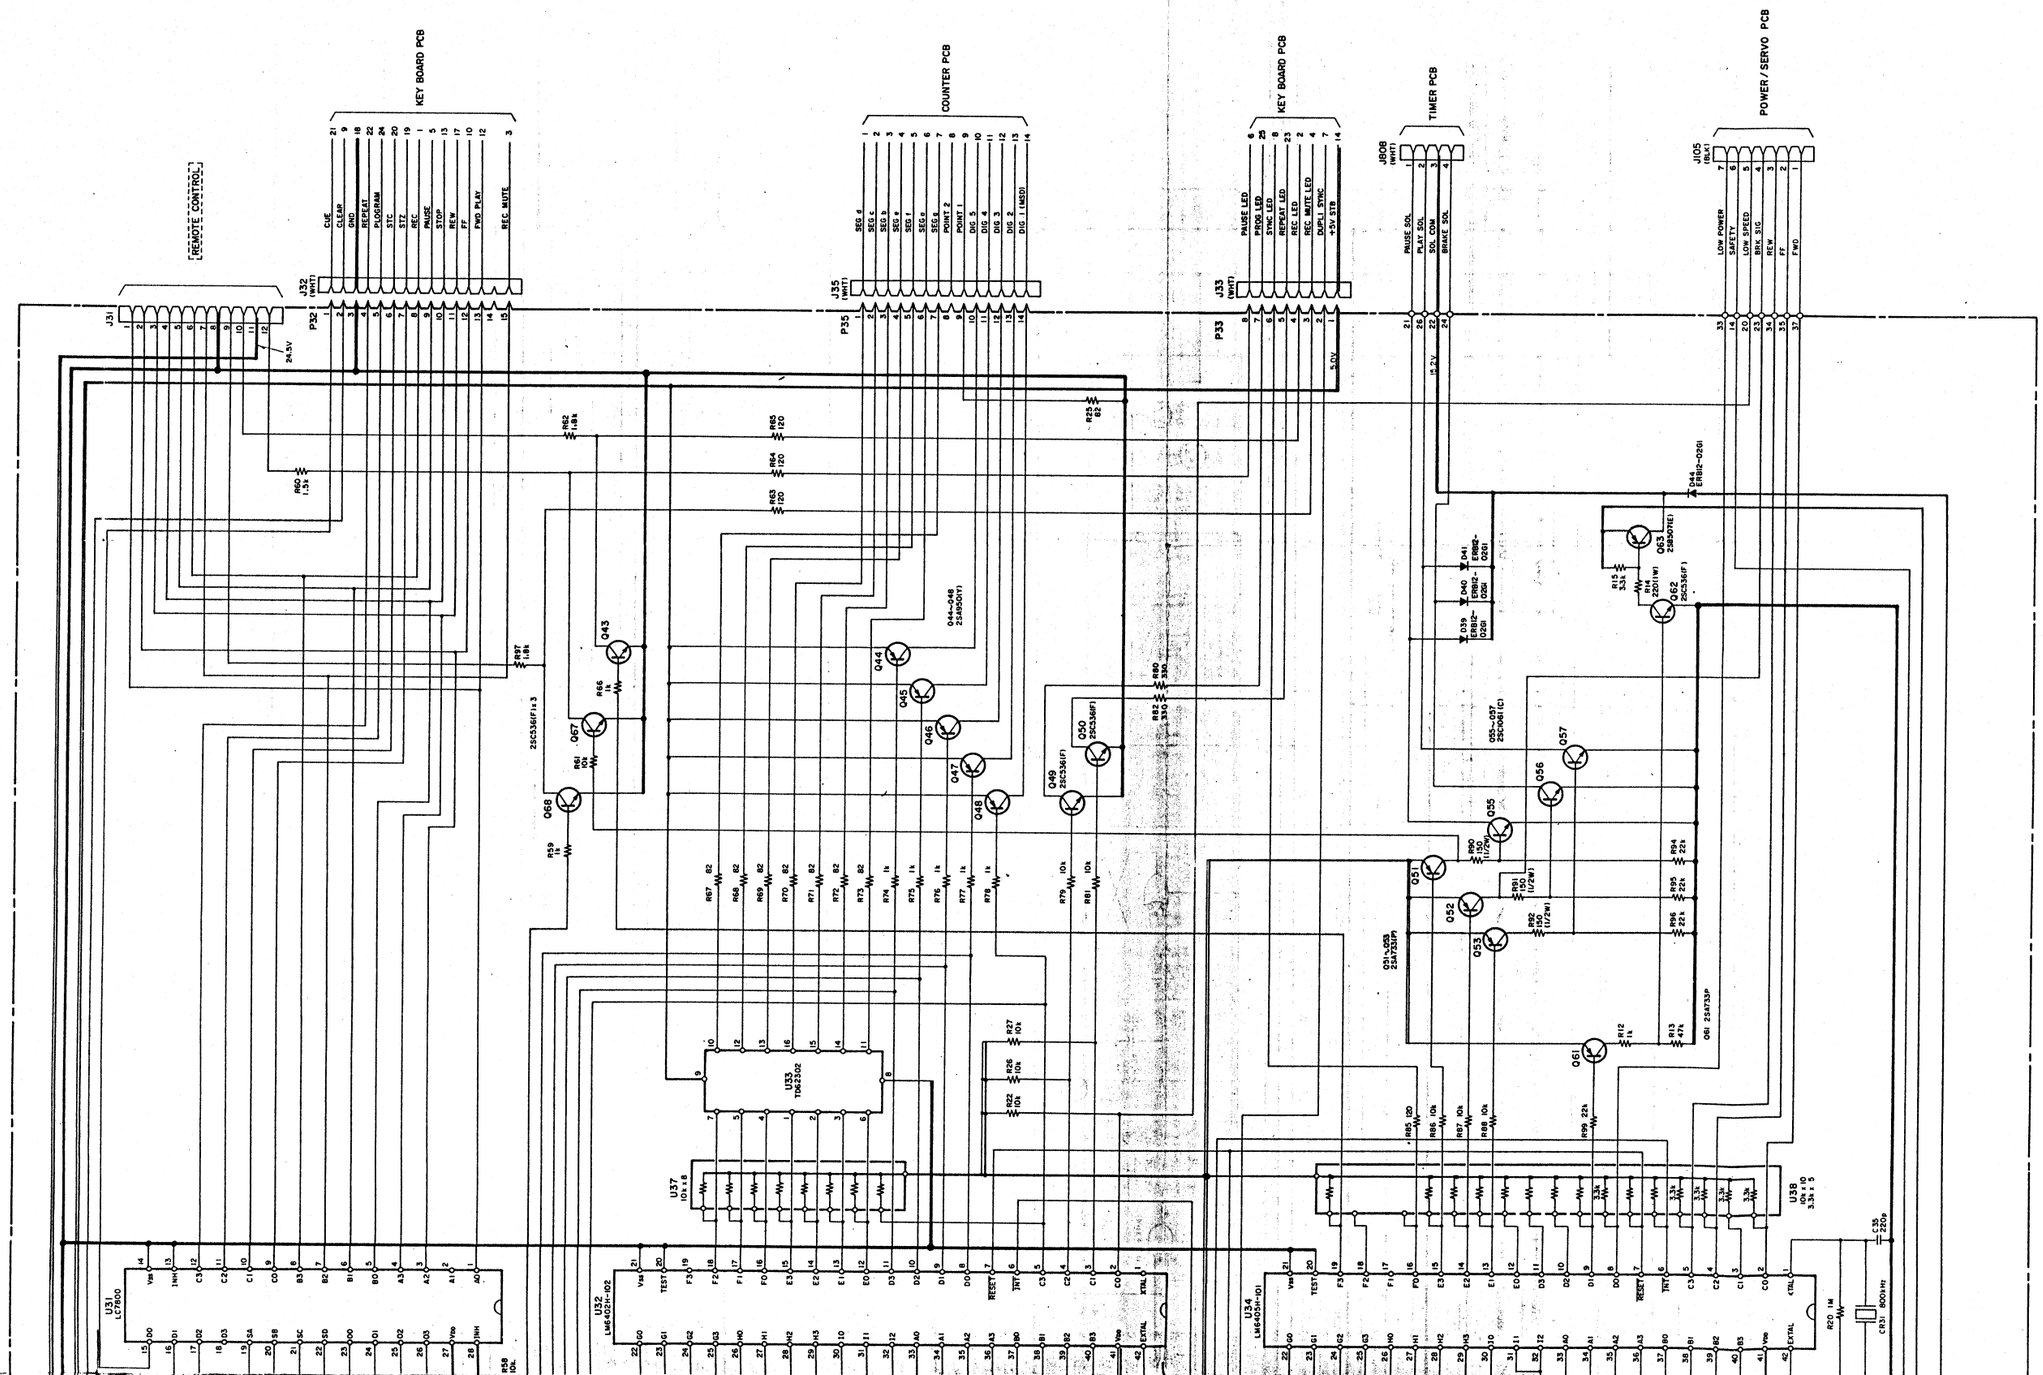

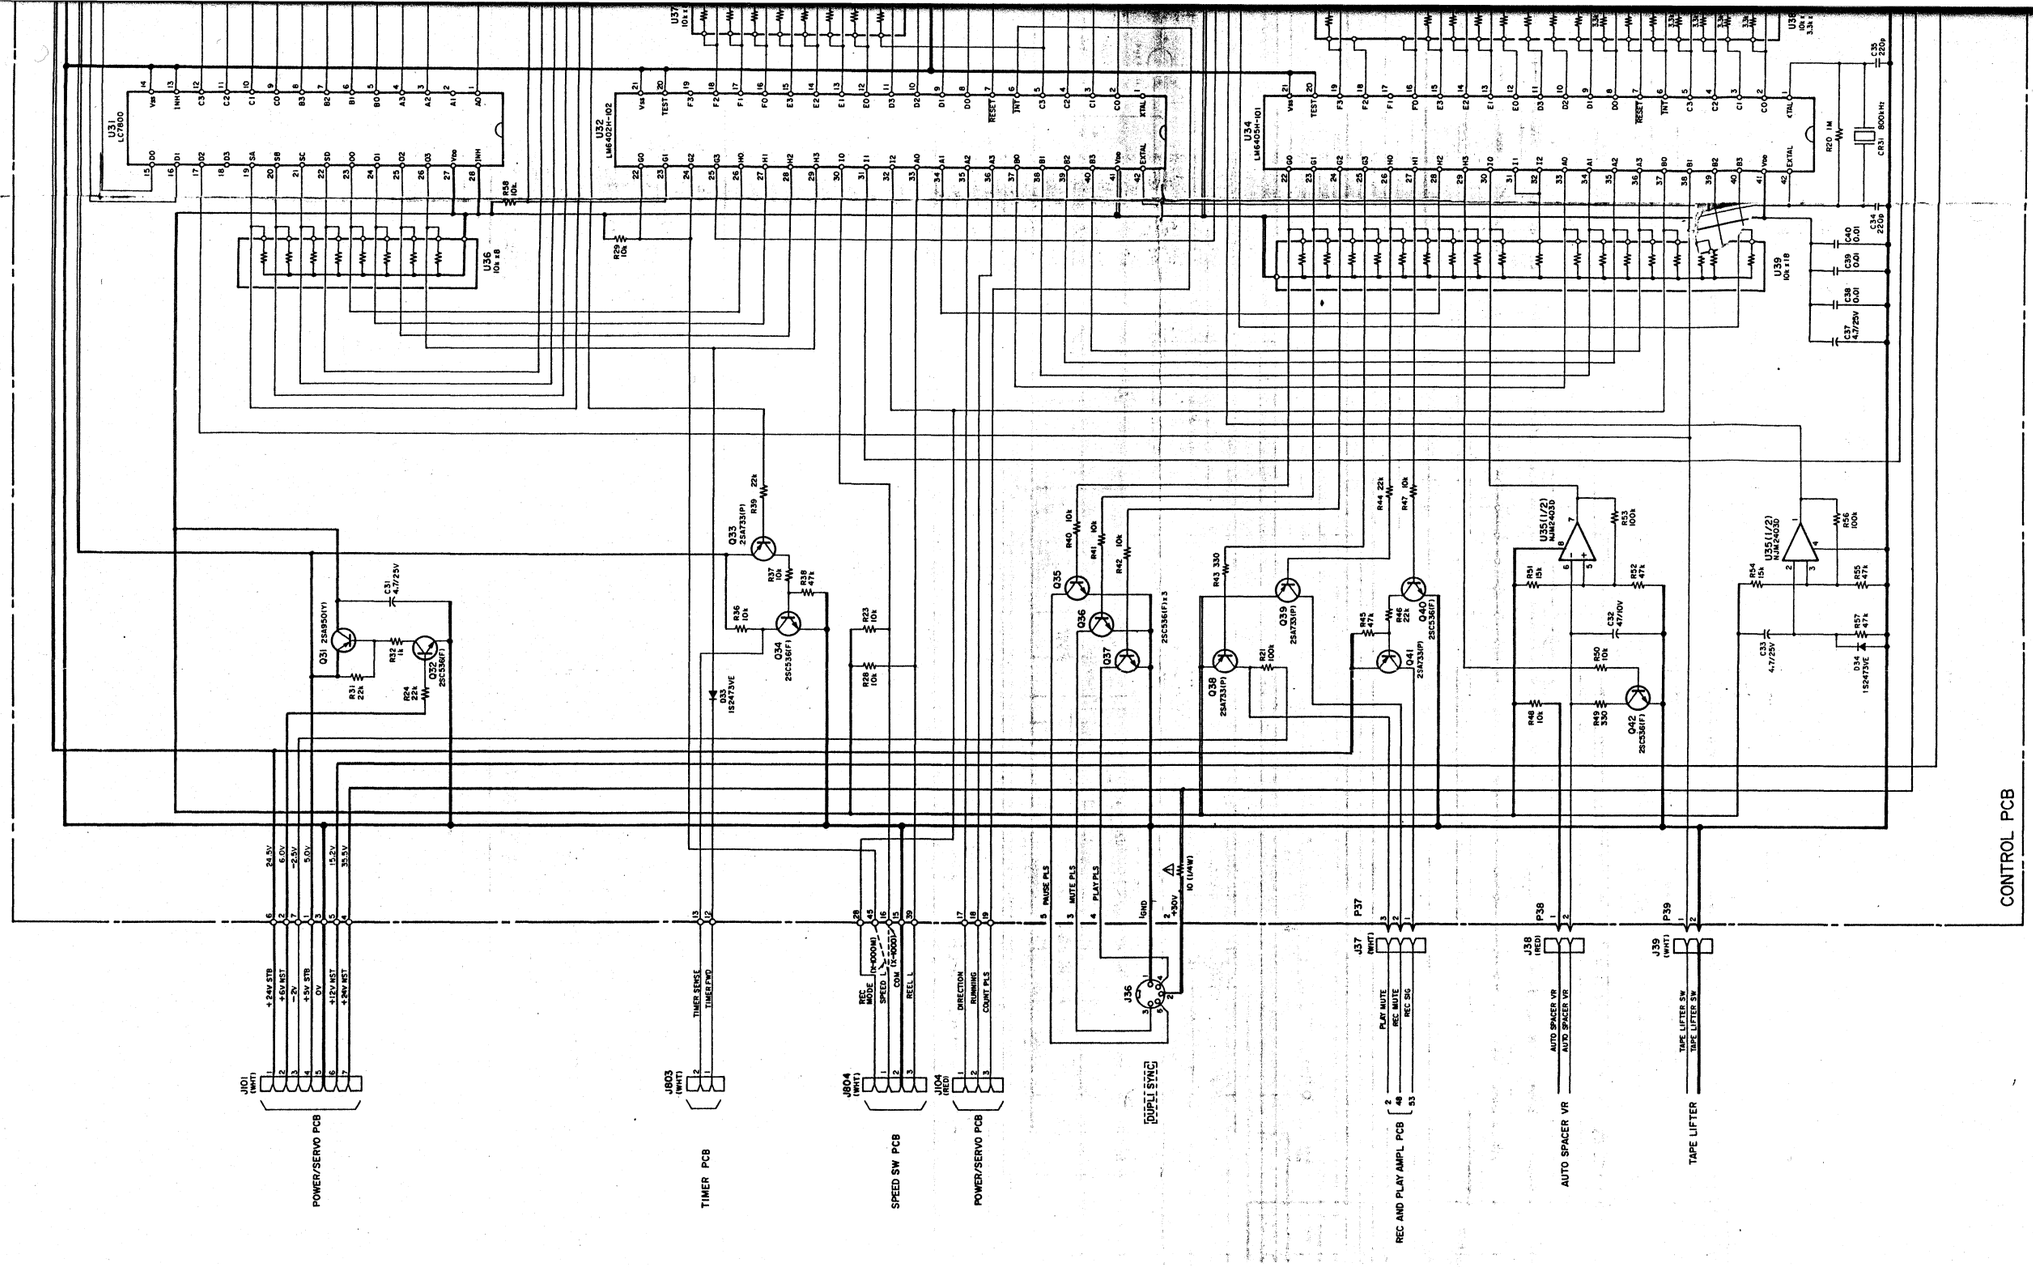

NOTES

1. Schematic diagram shown for left channel except for some of the components.
2. All resistors are ¼watt, ±5%, unless marked otherwise.
   Resistor values are in ohms (k = 1,000 ohms).
3. All capacitor values are in microfarads (p = picofarads).
4. ⚠ Parts marked with this sign are safety critical components. They must alwasy be replaced with identical components-refer to the TEAC parts list and ensure exact replacement.
5. Voltage and level values are for reference only.
   0dB = 0.775V
   Indicated values are those existing when the meter indicates 0VU.
6. ▭ : front panel indication
7. ▭ : rear panel indication
8. ——— +B power supply circuit.

X-1000M/X-1000

Stereo Tape Deck